

Contents

5 - TeSys contactors and reversing contactors

■ Contactors: definitions and comments	page 5/2
■ Tests according to standard utilisation categories conforming to IEC 60947-4-1 and 5-1	page 5/4
■ Current of asynchronous squirrel cage motors at nominal load	page 5/5
TeSys contactors selection guide	page 5/6

TeSys K contactors and reversing contactors

Selection guide	page 5/8
■ Contactors	
□ 6 to 16 A in category AC-3 and 6 to 12 A in category AC-4	page 5/14
□ 6 to 12 A in categories AC-3 and AC-4	page 5/15
□ 20 A in category AC-1	page 5/17
■ Reversing contactors	
□ 6 to 16 A in category AC-3 and 6 to 12 A in category AC-4	page 5/18
□ 6 to 12 A in categories AC-3 and AC-4	page 5/19
□ 20 A in category AC-1	page 5/20
■ Auxiliary contact blocks, suppressor modules and accessories	page 5/23

TeSys LC1 SK and LP1 SK mini-contactors

■ For motor control in categories AC-3 and AC-1	page 5/34
■ Instantaneous auxiliary contact blocks and suppressor modules	page 5/35

TeSys LC1 SKGC mini-contactors

■ For use in modular panels	page 5/42
■ Suppressor modules	page 5/43

TeSys D contactors and reversing contactors

Selection guide	page 5/46
■ Contactors for motor control	
□ Up to 75 kW at 400 V, in category AC-3	page 5/62
□ Up to 30 kW at 400 V, in category AC-3	page 5/63
□ From 25 to 200 A, in category AC-1	page 5/64
□ From 20 to 200 A, for the North American market, conforming to UL and CSA standards	page 5/71
■ Reversing contactors for motor control	
□ Up to 75 kW at 400 V, in category AC-3	page 5/72
□ Up to 15 kW at 400 V, in category AC-3	page 5/73
□ From 20 to 200 A, in category AC-1	page 5/74
■ Components parts for assembling reversing contactors	page 5/76
■ Instantaneous auxiliary contact blocks and suppressor modules	page 5/79
■ Coils for TeSys D contactors	page 5/86

TeSys contactors for switching 3-phase capacitor banks

■ Contactors used for power factor correction	page 5/102
---	------------

TeSys F contactors and reversing contactors

Selection guide [page 5/104](#)

- Contactors for motor control
 - 115 to 800 A, in category AC-3 [page 5/114](#)
 - 200 to 2100 A, in category AC-1 [page 5/115](#)

- Reversing contactors
 - 115 to 265 A, in category AC-3 [page 5/116](#)
 - 200 to 350 A, in category AC-1 [page 5/117](#)
 - Components for assembling reversing contactors [page 5/118](#)
 - Instantaneous contact blocks and accessories [page 5/123](#)

 - Coils for TeSys F contactors [page 5/130](#)

High power changeover contactor pairs for distribution

- For customer assembly [page 5/153](#)

Capacitive delayed opening devices

- For TeSys D contactors [page 5/156](#)
- For TeSys F contactors [page 5/157](#)

TeSys LC1 FG shockproof contactors

- Presentation, selection [page 5/158](#)
- Characteristics [page 5/166](#)
- References [page 5/174](#)
- Dimensions and schemes [page 5/180](#)

TeSys LC1 B contactors

- 750 to 1800 A, in category AC-3 [page 5/184](#)
- 800 to 2750 A, in category AC-1 [page 5/185](#)
- Accessories and spare parts [page 5/186](#)
- Replacement coils [page 5/188](#)

Variable composition contactors

Selection guide [page 5/226](#)

- CV1 B from 80 to 1000 A and CV3 B from 80 to 500 A [page 5/228](#)

3-pole vacuum contactors and reversing contactors

- LC1 V and CV2 V [page 5/232](#)

Magnetic latching contactors

- CR1 F and CR1 B [page 5/242](#)

Modular equipment

Selection guide [page 5/268](#)

- TeSys GC standard contactor [page 5/278](#)
- TeSys GF impulse relays [page 5/286](#)
- TeSys GY "dual tariff" contactors [page 5/292](#)

General

TeSys contactors

Definitions and comments

Definitions

Altitude

The rarefied atmosphere at high altitude reduces the dielectric strength of the air and hence the rated operational voltage of the contactor. It also reduces the cooling effect of the air and hence the rated operational current of the contactor (unless the temperature drops at the same time).

No derating is necessary up to 3000 m.

Derating factors to be applied above this altitude for main pole operational voltage and current (a.c. supply) are as follows.

Altitude	3500 m	4000 m	4500 m	5000 m
Rated operational voltage	0,90	0,80	0,70	0,60
Rated operational current	0,92	0,90	0,88	0,86

Ambient air temperature

The temperature of the air surrounding the device, measured near to the device.

The operating characteristics are given :

- with no restriction for temperatures between - 5 and + 55 °C,
- with restrictions, if necessary, for temperatures between - 50 and + 70 °C.

Rated operational current (Ie)

This is defined taking into account the rated operational voltage, operating rate and duty, utilisation category and ambient temperature around the device.

Rated conventional thermal current (Ith) (1)

The current which a closed contactor can sustain for a minimum of 8 hours without its temperature rise exceeding the limits given in the standards.

Permissible short time rating

The current which a closed contactor can sustain for a short time after a period of no load, without dangerous overheating.

Rated operational voltage (Ue)

This is the voltage value which, in conjunction with the rated operational current, determines the use of the contactor or starter, and on which the corresponding tests and the utilisation category are based. For 3-phase circuits it is expressed as the voltage between phases. Apart from exceptional cases such as rotor short-circuiting, the rated operational voltage Ue is less than or equal to the rated insulation voltage Ui.

Rated control circuit voltage (Uc)

The rated value of the control circuit voltage, on which the operating characteristics are based. For a.c. applications, the values are given for a near sinusoidal wave form (less than 5% total harmonic distortion).

Rated insulation voltage (Ui)

This is the voltage value used to define the insulation characteristics of a device and referred to in dielectric tests determining leakage paths and creepage distances. As the specifications are not identical for all standards, the rated value given for each of them is not necessarily the same.

Rated impulse withstand voltage (Uimp)

The peak value of a voltage surge which the device is able to withstand without breaking down.

Rated operational power (expressed in kW)

The rated power of the standard motor which can be switched by the contactor, at the stated operational voltage.

Rated breaking capacity (2)


This is the current value which the contactor can break in accordance with the breaking conditions specified in the IEC standard.

Rated making capacity (2)

This is the current value which the contactor can make in accordance with the making conditions specified in the IEC standard.

On-load factor (m)

$m = \frac{t}{T}$
This is the ratio between the time the current flows (t) and the duration of the cycle (T)
Cycle duration: duration of current flow + time at zero current



Pole impedance

The impedance of one pole is the sum of the impedance of all the circuit components between the input terminal and the output terminal. The impedance comprises a resistive component (R) and an inductive component ($X = L\omega$). The total impedance therefore depends on the frequency and is normally given for 50 Hz. This average value is given for the pole at its rated operational current.

Electrical durability

This is the average number of on-load operating cycles which the main pole contacts can perform without maintenance. The electrical durability depends on the utilisation category, the rated operational current and the rated operational voltage.

Mechanical durability

This is the average number of no-load operating cycles (i.e. with zero current flow through the main poles) which the contactor can perform without mechanical failure.

(1) Conventional thermal current, in free air, conforming to IEC standards.

(2) For a.c. applications, the breaking and making capacities are expressed by the rms value of the symmetrical component of the short-circuit current. Taking into account the maximum asymmetry which may exist in the circuit, the contacts therefore have to withstand a peak asymmetrical current which may be twice the rms symmetrical component.

Note : these definitions are extracted from standard IEC 60947-1.

General

TeSys contactors

Definitions and comments

Contactor utilisation categories conforming to IEC 60947-4

The standard utilisation categories define the current values which the contactor must be able to make or break.

These values depend on:

- the type of load being switched : squirrel cage or slip ring motor, resistors,
- the conditions under which making or breaking takes place: motor stalled, starting or running, reversing, plugging.

a.c. applications

Category AC-1

This category applies to all types of a.c. load with a power factor equal to or greater than 0.95 ($\cos \varphi \geq 0.95$).

Application examples: heating, distribution.

Category AC-2

This category applies to starting, plugging and inching of slip ring motors.

- On closing, the contactor makes the starting current, which is about 2.5 times the rated current of the motor.
- On opening, it must break the starting current, at a voltage less than or equal to the mains supply voltage.

Category AC-3

This category applies to squirrel cage motors with breaking during normal running of the motor.

- On closing, the contactor makes the starting current, which is about 5 to 7 times the rated current of the motor.
- On opening, it breaks the rated current drawn by the motor; at this point, the voltage at the contactor terminals is about 20% of the mains supply voltage. Breaking is light.

Application examples: all standard squirrel cage motors: lifts, escalators, conveyor belts, bucket elevators, compressors, pumps, mixers, air conditioning units, etc.... .

Category AC-4

This category covers applications with plugging and inching of squirrel cage and slip ring motors. The contactor closes at a current peak which may be as high as 5 or 7 times the rated motor current. On opening it breaks this same current at a voltage which is higher, the lower the motor speed. This voltage can be the same as the mains voltage. Breaking is severe

Application examples: printing machines, wire drawing machines, cranes and hoists, metallurgy industry.

d.c. applications

Category DC-1

This category applies to all types of d.c. load with a time constant (L/R) of less than or equal to 1 ms.

Category DC-3

This category applies to starting, counter-current braking and inching of shunt motors. Time constant ≤ 2 ms.

- On closing, the contactor makes the starting current, which is about 2.5 times the rated motor current.
- On opening, the contactor must be able to break 2.5 times the starting current at a voltage which is less than or equal to the mains voltage. The slower the motor speed, and therefore the lower its back e.m.f., the higher this voltage.

Breaking is difficult.

Category DC-5

This category applies to starting, counter-current braking and inching of series wound motors.

Time constant ≤ 7.5 ms.

On closing, the contactor makes a starting current peak which may be as high as 2.5 times the rated motor current. On opening, the contactor breaks this same current at a voltage which is higher, the lower the motor speed. This voltage can be the same as the mains voltage.

Breaking is severe.

5

Utilisation categories for auxiliary contacts & control relays conforming to IEC 60947-5

a.c. applications

Category AC-14 (1)

This category applies to the switching of electromagnetic loads whose power drawn with the electromagnet closed is less than 72 VA.

Application example: switching the operating coil of contactors and relays.

Category AC-15 (1)

This category applies to the switching of electromagnetic loads whose power drawn with the electromagnet closed is more than 72 VA.

Application example: switching the operating coil of contactors.

d.c. applications

Category DC-13 (2)

This category applies to the switching of electromagnetic loads for which the time taken to reach 95 % of the steady state current ($T = 0.95$) is equal to 6 times the power P drawn by the load (with $P \leq 50$ W).

Application example: switching the operating coil of contactors without economy resistor.

(1) Replaces category AC-11.

(2) Replaces category DC-13.

General

Technical information

Tests according to standard utilisation categories conforming to IEC 60947-4-1 and 5-1 based on rated operational current I_e and rated operational voltage U_e

Contactors

		Electrical durability: making and breaking conditions						Occasional duty: making and breaking conditions						
a.c. supply		Utilisation category	Making			Breaking			Making			Breaking		
Typical applications			I	U	$\cos \varphi$	I	U	$\cos \varphi$	I	U	$\cos \varphi$	I	U	$\cos \varphi$
Resistors, non inductive or slightly inductive loads	AC-1		I_e	U_e	0.95	I_e	U_e	0.95	1.5 I_e	1.05 U_e	0.8	1.5 I_e	1.05 U_e	0.8
Slip ring motors: starting, breaking.	AC-2		2.5 I_e	U_e	0.65	2.5 I_e	U_e	0.65	4 I_e	1.05 U_e	0.65	4 I_e	1.05 U_e	0.65
Squirrel cage motors: starting, breaking whilst motor running.	AC-3		$I_e \leq (1)$	U_e	0.65	1 I_e	0.17 U_e	0.65	10 I_e	1.05 U_e	0.45	8 I_e	1.05 U_e	0.45
$I_e > (2)$			6 I_e	U_e	0.35	1 I_e	0.17 U_e	0.35	10 I_e	1.05 U_e	0.35	8 I_e	1.05 U_e	0.35
Squirrel cage motors: starting, reversing, inching	AC-4		$I_e \leq (1)$	U_e	0.65	6 I_e	U_e	0.65	12 I_e	1.05 U_e	0.45	10 I_e	1.05 U_e	0.45
$I_e > (2)$			6 I_e	U_e	0.35	6 I_e	U_e	0.35	12 I_e	1.05 U_e	0.35	10 I_e	1.05 U_e	0.35
d.c. supply		Utilisation category	Making			Breaking			Making			Breaking		
Typical applications			I	U	L/R (ms)	I	U	L/R (ms)	I	U	L/R (ms)	I	U	L/R (ms)
Resistors, non inductive or slightly inductive loads	DC-1		I_e	U_e	1	I_e	U_e	1	1.5 I_e	1.05 U_e	1	1.5 I_e	1.05 U_e	1
Shunt wound motors: starting, reversing, inching	DC-3		2.5 I_e	U_e	2	2.5 I_e	U_e	2	4 I_e	1.05 U_e	2.5	4 I_e	1.05 U_e	2.5
Series wound motors: starting, reversing, inching	DC-5		2.5 I_e	U_e	7.5	2.5 I_e	U_e	7.5	4 I_e	1.05 U_e	15	4 I_e	1.05 U_e	15

5

Control relays and auxiliary contacts

		Electrical durability: making and breaking conditions						Occasional duty: making and breaking conditions						
a.c. supply		Utilisation category	Making			Breaking			Making			Breaking		
Typical applications			I	U	$\cos \varphi$	I	U	$\cos \varphi$	I	U	$\cos \varphi$	I	U	$\cos \varphi$
Electromagnets			–	–	–	–	–	–	6 I_e	1.1 U_e	0.7	6 I_e	1.1 U_e	0.7
≤ 72 VA	AC-14		–	–	–	–	–	–	6 I_e	1.1 U_e	0.7	6 I_e	1.1 U_e	0.7
> 72 VA	AC-15		10 I_e	U_e	0.7	1 I_e	U_e	0.4	10 I_e	1.1 U_e	0.3	10 I_e	1.1 U_e	0.3
d.c. supply		Utilisation category	Making			Breaking			Making			Breaking		
Typical applications			I	U	L/R (ms)	I	U	L/R (ms)	I	U	L/R (ms)	I	U	L/R (ms)
Electromagnets	DC-13		I_e	U_e	6 P (3)	I_e	U_e	6 P (3)	1.1 I_e	1.1 U_e	6 P (3)	1.1 I_e	1.1 U_e	6 P (3)

- (1) $I_e \leq 17$ A for electrical durability, $I_e \leq 100$ A for occasional duty.
 - (2) $I_e > 17$ A for electrical durability, $I_e > 100$ A for occasional duty.
 - (3) The value 6 P (in watts) is based on practical observations and is considered to represent the majority of d.c. magnetic loads up to the maximum limit of $P = 50$ W i.e. $6 P = 300$ ms = L/R.
- Above this, the loads are made up of smaller loads in parallel. The value 300 ms is therefore a maximum limit whatever the value of current drawn.

General

Technical information

Current of asynchronous squirrel cage motors
at nominal load

3-phase 4-pole motors

Current values for power in kW

Rated operational power (1)	Indicative rated operational current values at:			
	230 V	400 V	500 V	690 V
kW	A	A	A	A
0.06	0.35	0.2	0.16	0.12
0.09	0.52	0.3	0.24	0.17
0.12	0.7	0.44	0.32	0.23
0.18	1	0.6	0.48	0.35
0.25	1.5	0.85	0.68	0.49
0.37	1.9	1.1	0.88	0.64
0.55	2.6	1.5	1.2	0.87
0.75	3.3	1.9	1.5	1.1
1.1	4.7	2.7	2.2	1.6
1.5	6.3	3.6	2.9	2.1
2.2	8.5	4.9	3.9	2.8
3	11.3	6.5	5.2	3.8
4	15	8.5	6.8	4.9
5.5	20	11.5	9.2	6.7
7.5	27	15.5	12.4	8.9
11	38	22	17.6	12.8
15	51	29	23	17
18.5	61	35	28	21
22	72	41	33	24
30	96	55	44	32
37	115	66	53	39
45	140	80	64	47
55	169	97	78	57
75	230	132	106	77
90	278	160	128	93
110	340	195	156	113
132	400	230	184	134
160	487	280	224	162
200	609	350	280	203
250	748	430	344	250
315	940	540	432	313
355	1061	610	488	354
400	1200	690	552	400
500	1478	850	680	493
560	1652	950	760	551
630	1844	1060	848	615
710	2070	1190	952	690
800	2340	1346	1076	780
900	2640	1518	1214	880
1000	2910	1673	1339	970

(1) Values conforming to standard IEC 60072-1 (at 50 Hz).

(2) Values conforming to standard UL 508 (at 60 Hz).

Note : These values are given as a guide. They may vary depending on the type of motor, its polarity and the manufacturer.

Current values for power in hp

Rated operational power (2)	Indicative rated operational current values at:						
	110 - 120 V	200 V	208 V	220 - 240 V	380 - 415 V	440 - 480 V	550 - 600 V
hp	A	A	A	A	A	A	A
1/2	4.4	2.5	2.4	2.2	1.3	1.1	0.9
3/4	6.4	3.7	3.5	3.2	1.8	1.6	1.3
1	8.4	4.8	4.6	4.2	2.3	2.1	1.7
1 1/2	12	6.9	6.6	6	3.3	3	2.4
2	13.6	7.8	7.5	6.8	4.3	3.4	2.7
3	19.2	11	10.6	9.6	6.1	4.8	3.9
5	30.4	17.5	16.7	15.2	9.7	7.6	6.1
7 1/2	44	25.3	24.2	22	14	11	9
10	56	32.2	30.8	28	18	14	11
15	84	48.3	46.2	42	27	21	17
20	108	62.1	59.4	54	34	27	22
25	136	78.2	74.8	68	44	34	27
30	160	92	88	80	51	40	32
40	208	120	114	104	66	52	41
50	260	150	143	130	83	65	52
60	—	177	169	154	103	77	62
75	—	221	211	192	128	96	77
100	—	285	273	248	165	124	99
125	—	359	343	312	208	156	125
150	—	414	396	360	240	180	144
200	—	552	528	480	320	240	192
250	—	—	—	604	403	302	242
300	—	—	—	722	482	361	289
350	—	—	—	828	560	414	336
400	—	—	—	954	636	477	382
450	—	—	—	1030	—	515	412
500	—	—	—	1180	786	590	472

Selection guide

TeSys contactors

Applications	Equipment based on standard contactors				Equipment requiring low consumption contactors which can be switched directly from solid state outputs			
								
								
Rated operational current	AC-3	6 A 12 A	6..0.16 A 20 A	9...150 A 25...200 A	115...800 A 200...2100 A	750...1800 A 800...2750 A	6...12 A 20 A	9...25 A 20...40 A
Rated operational voltage		690 V	690 V	690 V	1000 V	1000 V	690 V	690 V
Number of poles		2 or 3	3 or 4	3 or 4	2, 3 or 4	1...4	3 or 4	3
Contactor type references		LC1 SK LP1 SK	LC1 K LC7 K LP1 K	LC1 D	LC1 F	LC1 B	LP4 K	LC1 D
Pages		5/8 and 5/9	5/46 and 5/47	5/104 and 5/105	5/15	5/48 and 5/49		

5

Equipment requiring magnetic latching contactors	Motors, resistive circuits, rotor short-circuiting devices, electro lifting magnets, hoisting, mines, ... motors, high operating rates. Variable composition bar mounted contactors.	Induction heating, heating of metal or of a metal part in a channel or crucible furnace by induction of a.c. currents. Contactors for induction heating applications.	Applications conforming to "NATO" specifications and references. Shockproof contactors
--	--	---	--



150...1800 A	80...1800 A	—	12...630 A
250...2750 A	80...2750 A	80...16 300 A	25...850 A
1000 V	~ 1000 V — 440 or 1500 V	3000 V	690 V or 1000 V
1...4	1...6	1...8	3 or 4
CR1 F CR1 B	CV•	CE• CS•	LC1 D•G LP1 D•G LC1 FG•••

5

5/250 to 5/259	5/226 and 5/227	Please consult your Regional Sales Office
----------------	-----------------	---

Selection guide

TeSys contactors

From 6 to 16 A

Applications	Simple automation systems	
		
Rated operational current	6 A 12 A	6 A –
Rated operational voltage	690 V	
Number of poles	2 or 3	3
Rated operational power in category AC-3	220/240 V 380/400 V 415/440 V 500 V 660/690 V 1000 V	1.1 kW 2.2 kW 2.2 kW – – –
Add-on auxiliary contact blocks	Front Side Front time delay Front dust and damp protected	Up to 2 N/C or N/O – – –
Associated manual-auto thermal overload relays	Class 10 A Class 20 A	0.11...16 A –
Suppressor modules		Varistor or diode Varistor, diode + Zener diode or RC circuit
Contactor type references	~ ---	LC1 SK LP1 SK
Reversing contactor with mechanical interlock type references	~ ---	LC2 or LC8 K06 LP2 K06
Pages	Contactors Reversing contactors	5/34 and 5/35 –
		5/14 to 5/17 5/18 to 5/21

9 A
20 A



12 A
—

16 A
—

3 or 4

2.2 kW
4 kW
4 kW
4 kW
4 kW
—

3 kW
5.5 kW
5.5 kW
4 kW
4 kW
—

3 kW
7.5 kW
7.5 kW
5.5 kW
4 kW
—

5

LC1 or LC7 K09

LP1 K09

LC1 or LC7 K12

LP1 K12

LC1 K16

—

LC2 or LC8 K09

LP2 K09

LC2 or LC8 K12

LP2 K12

LC2 K16

—

Characteristics

TeSys contactors

TeSys K contactors and reversing contactors

Environment characteristics

Conforming to standards		IEC 60947, NF C 63-110, VDE 0660, BS 5424		
Product certifications		UL, CSA		
Operating positions		 Possible positions for LC• K only. Contactor pull-in voltage: 0.85 Uc		
Connection		Min.	Max.	Max. to IEC 60947
Screw clamp terminals	Solid conductor	mm ²	1 x 1.5	2 x 4
	Flexible conductor without cable end	mm ²	1 x 0.75	2 x 4
	Flexible conductor with cable end	mm ²	1 x 0.34	1 x 1.5 + 1 x 2.5
Spring terminals	Solid conductor	mm ²	1 x 0.75	1 x 1.5
	Flexible conductor without cable end	mm ²	1 x 0.75	1 x 1.5
Faston connectors	Clip	mm	2 x 2.8 or 1 x 6.35	
Solder pins for printed circuit board	With locating device between power and control circuits		4 mm x 35 microns	
Tightening torque	Philips head n° 2 and Ø 6	N.m	0.8	
Terminal referencing	Conforming to standards EN 50005 and EN 50012		Up to 5 contacts, depending on model	
Rated insulation voltage (Ui)	Conforming to IEC 60947	V	690	
	Conforming to VDE 0110 gr C	V	750	
	Conforming to BS 5424, NF C 20-040	V	690	
	Conforming to CSA 22-2 n° 14, UL 508	V	600	
Rated impulse withstand voltage (Uiimp)		kV	8	
Protective treatment	Conforming to IEC 60068 (DIN 50016)		"TC" (Klimafest, Climateproof)	
Degree of protection	Conforming to VDE 0106		Protection against direct finger contact	
Ambient air temperature around the device	Storage	°C	- 50...+ 80	
	Operation	°C	- 25...+ 50	
Maximum operating altitude	Without derating	m	2000	
Vibration resistance 5 ... 300 Hz	Contactor open		2 gn	
	Contactor closed		4 gn	
Flame resistance	Conforming to UL 94		Self-extinguishing materials V1	
	Conforming to NF F 16-101 and 16-102		Conforming to requirement 2	
Shock resistance (1/2 sine wave, 11 ms)	Contactor open		On X axis: 6 gn On Y and Z axes: 10 gn	
	Contactor closed		On X axis: 10 gn On Y and Z axes: 15 gn	
Safe separation of circuits	Conforming to VDE 0106 and IEC 60536		SELV (Safety Extra Low Voltage), up to 400 V	

Characteristics (continued)

TeSys contactors

TeSys K contactors and reversing contactors

Pole characteristics

Type	LC• or LP•	K06	K09	K12	K16
Conventional thermal current (I _{th})	For ambient temperature ≤ 50 °C	A	20		
Rated operational frequency	Hz	50/60			
Frequency limits of the operational current	Hz	Up to 400			
Rated operational voltage (U _e)	V	690			
Rated making capacity	I rms conforming to NF C 63 110 and IEC 60947	A	110	110	144
Rated breaking capacity	220/230 V	A	110	110	—
	380/400 V	A	110	110	—
	415 V	A	110	110	—
	440 V	A	110	110	110
	500 V	A	80	80	80
	660/690 V	A	70	70	70
Permissible short time rating	1 s	A	90	90	115
	5 s	A	85	85	105
	10 s	A	80	80	100
	30 s	A	60	60	75
	1 min	A	45	45	55
	3 min	A	40	40	50
	≥ 15 min	A	20	20	25
Short-circuit protection	gG fuse U ≤ 440 V (aM fuse, see page 6/12)	A	25		
Average impedance per pole	At I _{th} and 50 Hz	mΩ	3		
Use in category AC-1 resistive circuits, heating, lighting (U _e ≤ 440 V)	Maximum rated operational current for a temperature ≤ 50 °C	A	20		
	Maximum rated operational current for a temperature ≤ 70 °C	A	16 for U _e only		
	Rated operational current limits in relation to the on-load factor and operating frequency	A	On-load factor 90 % 60 % 30 %		
		A	300 operating cycles/hour 13 15 18		
		A	120 operating cycles/hour 15 18 19		
		A	30 operating cycles/hour 19 20 20		
Use in category AC-3 squirrel cage motors	Increase in rated operational current by paralleling of poles		Apply the following coefficients to the above currents; these coefficients take into account an often unbalanced distribution of current between the poles 2 poles in parallel: K = 1.60 3 poles in parallel: K = 2.25 4 poles in parallel: K = 2.80		
	Operational power according to the voltage. Voltage 50 or 60 Hz	115V single-ph. kW 0.37 0.55 — —			
	220V single-ph. kW 0.75 1.1 — —				
	220/230V 3-ph. kW 1.5 2.2 3 4				
	380/415V 3-ph. kW 2.2 4 5.5 7.5				
	440/480V 3-ph. kW 3 4 5.5/4 (480) 5.5/4 (480)				
Maximum operating rate (in operating cycles/hour in relation to % of rated power)	500/600V 3-ph. kW 3 4 4 4				
	660/690V 3-ph. kW 3 4 4 4				
			Op. cycles/h 600 900 1200		
			Power 100 % 75 % 50 %		

Characteristics (continued)

TeSys contactors

TeSys K contactors and reversing contactors

Control circuit characteristics

Type	V	LC1 ~ 12...690 (1)	LC2 ~ 24...240 (1)	LC7 ~ 12...250 (1)	LP1 ~ 12...120	LP2	LP4	LP5
Rated control circuit voltage (Uc)								
Control voltage limits (≤ 50 °C)								
single voltage coil	Operation	0.8...1.15 Uc (2)	0.85...1.1 Uc	0.8...1.15 Uc	0.7...1.30 Uc			
	Drop-out	≥ 0.20 Uc	≥ 0.10 Uc	≥ 0.10 Uc	≥ 0.10 Uc	≥ 0.10 Uc		
Average consumption at 20 °C and at Uc								
Inrush		30 VA	3 VA	3 W	1.8 W			
Sealed		4.5 VA	3 VA	3 W	1.8 W			
Heat dissipation	W	1.3	3	3	1.8			
Operating time at 20 °C and at Uc								
Between coil energisation and:								
- opening of the N/C contacts	ms	5...15	25...35	25...35	25...35			
- closing of the N/O contacts	ms	10...20	30...40	30...40	30...40			
Between coil de-energisation and:								
- opening of the N/O contacts	ms	10...20	30	10	10...20			
- closing of the N/C contacts	ms	15...25	40	15	15...25			
Maximum immunity to microbreaks	ms	2	2	2	2			
Maximum operating rate	In operating cycles per hour	3600	3600	3600	3600			
Mechanical durability at Uc								
In millions of operating cycles	50/60 Hz coil	10	5	10	5	—	—	—
	— coil	—	—	—	—	10	5	—
	Wide range coil, Low consumption	—	—	—	—	—	30	5

(1) For mains supplies with a high level of interference (voltage surge > 800 V), use a suppressor module LA4 KE1FC (50...129 V) or LA4 KE1UG (130...250 V), see page 5/24.

(2) LC1 K16: 0.85...1.15 Uc.

Characteristics (continued)

TeSys contactors

TeSys K contactors and reversing contactors

Auxiliary contact characteristics of contactors and instantaneous contact blocks

Number of auxiliary contacts	On LC• K or LP• K 3-pole On LA1 K		1 2 or 4
Rated operational voltage (Ue)	Up to	V	690
Rated insulation voltage (Ui)	Conforming to BS 5424 Conforming to IEC 60947 Conforming to VDE 0110 group C Conforming to CSA C 22-2 n° 14	V	690 690 750 600
Conventional thermal current (Ith)	For ambient temperature ≤ 50 °C	A	10
Frequency of the operational current		Hz	Up to 400
Minimum switching capacity	U min (DIN 19 240) I min	V mA	17 5
Short-circuit protection	Conforming to IEC 60947 and VDE 0660, gG fuse	A	10
Rated making capacity	Conforming to IEC 60947	I rms	A
Short-time rating	Permissible for	1 s 500 ms 100 ms	A
Insulation resistance		MΩ	> 10
Non-overlap distance	LA1 K: linked contacts conforming to INRS, BIA and CNA specifications	mm	0.5 (see schemes pages 5/27 and 5/29)

Operational power of contacts conforming to IEC 60947

a.c. supply, category AC-15

Electrical durability (valid for up to 3600 operating cycles/hour) on an inductive load such as the coil of an electromagnet: making current ($\cos \varphi 0.7$) = 10 times the power broken ($\cos \varphi 0.4$).

1 million operating cycles
3 million operating cycles
10 million operating cycles
Occasional making capacity

V	24	48	110/127	220/230	380/400	440	600/690
VA	48	96	240	440	800	880	1200
VA	17	34	86	158	288	317	500
VA	7	14	36	66	120	132	200
VA	1000	2050	5000	10 000	14 000	13 000	9000

1 Breaking limit of contacts valid for:

- maximum of 50 operating cycles at 10 s intervals (power broken = making current $\times \cos \varphi 0.7$).

2 Electrical durability of contacts for:


- 1 million operating cycles (2a)
- 3 million operating cycles (2b)
- 10 million operating cycles (2c).

3 Breaking limit of contacts valid for:

- maximum of 20 operating cycles at 10 s intervals with current passing for 0.5 s per operating cycle.

4 Thermal limit.

Power broken in VA

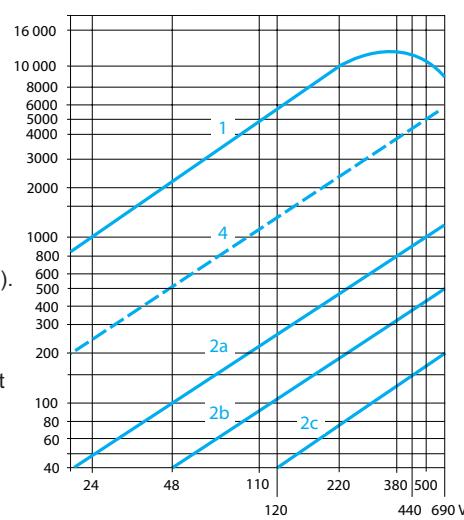


d.c. supply, category DC-13

Electrical durability (valid for up to 1200 operating cycles/hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the load.

V	24	48	110	220	440	600
W	120	80	60	52	51	50
W	55	38	30	28	26	25
W	15	11	9	8	7	6
W	720	600	400	300	230	200

Power broken in W

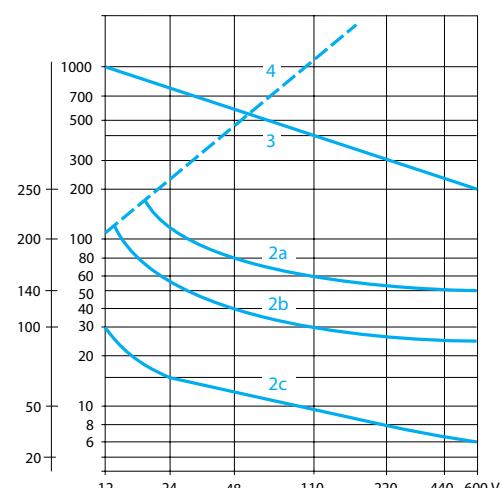

References

TeSys contactors

Contactors for motor control,
6 to 16 A in category AC-3 and 6 to 12 A
in category AC-4
Control circuit: a.c.



LC1 K0910••



LC1 K09103••



LC1 K09107••



LC1 K09105••



LC7 K0910••

Contactor selection according to utilisation category, see pages 5/194 to 5/197 and 5/200 to 5/203.

Mounting on 35 mm → rail or Ø 4 screw fixing.

Screws in the open "ready-to-tighten" position.

Add-on auxiliary contact blocks and accessories, see pages 5/22 to 5/25.

3-pole contactors for standard applications

Standard power ratings of 3-phase motors 50-60 Hz in category AC-3				Rated operational current in category AC-3	Instantaneous auxiliary contacts	Basic reference, to be completed by adding the voltage code (1) (2)	Weight
kW	kW	kW	A				kg
220 V	380 V	440/500 V	440 V up to				
230 V	415 V	660/690 V					
1.5	2.2	3	6	1	—	LC1 K0610••	0.180
				—	1	LC1 K0601••	0.180
2.2	4	4	9	1	—	LC1 K0910••	0.180
				—	1	LC1 K0901••	0.180
3	5.5	4 (> 440)	12	1	—	LC1 K1210••	0.180
		5.5 (440)		—	1	LC1 K1201••	0.180
4	7.5	4 (> 440)	16	1	—	LC1 K1610••	0.180
		5.5 (440)		—	1	LC1 K1601••	0.180

Spring terminal connections

For 6 to 12 A ratings only, in the references selected above, insert a figure 3 before the voltage code.

Example: LC1 K0610•• becomes LC1 K06103••.

Faston connectors, 1 x 6.35 or 2 x 2.8

For 6 to 16 A ratings, in the references selected above, insert a figure 7 before the voltage code.

Example: LC1 K0610•• becomes LC1 K06107••.

Solder pins for printed circuit boards

For 6 to 16 A ratings, in the references selected above, insert a figure 5 before the voltage code.

Example: LC1 K0610•• becomes LC1 K06105••.

3-pole silent contactors

Recommended for use in areas sensitive to noise, high interference mains supplies, etc.

Coil with rectifier incorporated, suppressor fitted as standard.

Screw clamp connections

1.5	2.2	3	6	1	—	LC7 K0610••	0.225
				—	1	LC7 K0601••	0.225
2.2	4	4	9	1	—	LC7 K0910••	0.225
				—	1	LC7 K0901••	0.225
3	5.5	4 (> 440)	12	1	—	LC7 K1210••	0.225
		5.5 (440)		—	1	LC7 K1201••	0.225

Faston connectors, 1 x 6.35 or 2 x 2.8

In the references selected above, insert a figure 7 before the voltage code.

Example: LC7 K0610•• becomes LC7 K06107••.

Solder pins for printed circuit boards

In the references selected above, insert a figure 5 before the voltage code.

Example: LC7 K0610•• becomes LC7 K06105••.

(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply

Contactors LC1 K (0.8...1.1 Uc) (0.85...1.1 Uc)

Volts	12	20	24 (2)	36	42	48	110	115	120	127	200/208	220/230	230	230/240
50/60 Hz	J7	Z7	B7	C7	D7	E7	F7	FE7	G7	FC7	L7	M7	P7	U7
Volts	256	277	380/400	400	400/415	440	480	500	575	600	660/690			
50/60 Hz	W7	UE7	Q7	—	V7	N7	R7	T7	S7	SC7	X7	Y7	—	—

Up to and including 240 V, coil with integral suppression device available: add 2 to the code required. Example: J72.

Contactors LC7 K (0.85...1.1 Uc)

Volts	24	42	48	110	115	220	230/240
50/60 Hz	B7	D7	E7	F7	FE7	M7	U7

(2) For mains supplies with a high level of interference (voltage surge > 800 V), use a suppressor module LA4 KE1FC (50...129 V) or LA4 KE1UG (130...250 V), see page 5/24

Selection :
pages 5/194 and 5/196

Characteristics :
pages 5/10 to 5/13


Dimensions :
page 5/26

Schemes :
page 5/27

References

TeSys contactors

Contactors for motor control,
6 to 12 A in categories AC-3 and AC-4
Control circuit: d.c. or low consumption



Contactor selection according to utilisation category, see pages 5/194 to 5/197 and 5/200 to 5/203.

Mounting on 35 mm rail or Ø 4 screw fixing.

Screws in the open "ready-to-tighten" position.

Add-on auxiliary contact blocks and accessories, see pages 5/22 to 5/25

3-pole contactors, d.c. supply

Standard power ratings of 3-phase motors 50-60 Hz in category AC-3			Rated operational current in category AC-3	Instantaneous auxiliary contacts	Basic reference, to be completed by adding the voltage code (1) (2)	Weight
220 V	380 V	440/500 V	440 V up to	1 / 1		
230 V	415 V	660/690 V				
kW	kW	kW	A			kg
Screw clamp connections						
1.5	2.2	3	6	1 –	LP1 K0610••	0.225
				– 1	LP1 K0601••	0.225
2.2	4	4	9	1 –	LP1 K0910••	0.225
				– 1	LP1 K0901••	0.225
3	5.5	4 (> 440)	12	1 –	LP1 K1210••	0.225
		5.5 (440)		– 1	LP1 K1201••	0.225
Spring terminal connections						
In the references selected above, insert a figure 3 before the voltage code.						
Example: LP1 K0610•• becomes LP1 K06103••.						

Faston connectors, 1 x 6.35 or 2 x 2.8

In the references selected above, insert a figure 7 before the voltage code.

Example: LP1 K0610•• becomes LP1 K06107••.

Solder pins for printed circuit boards

In the references selected above, insert a figure 5 before the voltage code.

Example: LP1 K0610•• becomes LP1 K06105••.

3-pole low consumption contactors

Compatible with programmable controller outputs.

LED indicator incorporated (except models LP4 K••••FW3 and LP4 K••••GW3).

Wide range coil (0.7...1.30 Uc), suppressor fitted as standard, consumption 1.8 W.

5



Screw clamp connections

1.5	2.2	3	6	1 –	LP4 K0610••	0.235
				– 1	LP4 K0601••	0.235
2.2	4	4	9	1 –	LP4 K0910••	0.235
				– 1	LP4 K0901••	0.235
3	5.5	4 (> 440)	12	1 –	LP4 K1210••	0.235
		5.5 (440)		– 1	LP4 K1201••	0.235

Spring terminal connections

In the references selected above, insert a figure 3 before the voltage code.

Example: LP4 K0610•• becomes LP4 K06103••.

Faston connectors, 1 x 6.35 or 2 x 2.8

In the references selected above, insert a figure 7 before the voltage code.

Example: LP4 K0610•• becomes LP4 K06107••.

Solder pins for printed circuit boards

In the references selected above, insert a figure 5 before the voltage code.

Example: LP4 K0610•• becomes LP4 K06105••.

(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

d.c. supply (contactors LP1 K: 0.8P1.15 Uc)

Volts	12	20	24 (2)	36	48	60	72	100	110	125	155	174	200	220	230	240	250
Code	JD	ZD	BD	CD	ED	ND	SD	KD	FD	GD	PD	QD	LD	MD	MPD	MUD	UD

Coil with integral suppression device available: add 3 to the code required. Example: JD3

Low consumption (contactors LP4 K: 0.7P1.130 Uc)

Volts	12	20	24	48	72	110	120
Code	JW3	ZW3	BW3	EW3	SW3	FW3	GW3

(2) For LP1 K only, when connecting an electronic sensor or timer in series with the contactor coil, select a 20 V coil (~ control circuit voltage code Z7, --- control circuit voltage code ZD) so as to compensate for the incurred voltage drop.



Selection :
pages 5/194 and 5/196

Characteristics :
pages 5/10 to 5/13

Dimensions :
page 5/26

Schemes :
page 5/27

Schneider
Electric

5/15

References

TeSys contactors

Contactors for control in category AC-1, 20 A
Control circuit: a.c.



LC1 K09004••



LC1 K09103••



LC1 K09107••



LC1 K09004••

Contactor selection according to utilisation category, see pages 5/198 and 5/199.

Mounting on 35 mm → rail or Ø 4 screw fixing.

Screws in the open "ready-to-tighten" position.

Add-on auxiliary contact blocks and accessories, see pages 5/22 to 5/25.

3 or 4-pole contactors for standard applications (1)

Non-inductive loads Category AC-1 Maximum current at $\theta \leq 50^\circ\text{C}$	Number of poles	Instantaneous auxiliary contacts	Basic reference, to be completed by adding the voltage code (2) (3)	Weight kg
A				
Screw clamp connections				
20	3	—	1 — LC1 K0910•• or LC1 K1210••	0.180
	3	—	— 1 LC1 K0901•• or LC1 K1201••	0.180
	4	—	— — LC1 K09004•• or LC1 K12004••	0.180
	2	2	— — LC1 K09008••	0.180

Spring terminal connections

In the references selected above, insert a figure 3 before the voltage code.

Example: LC1 K0910•• becomes LC1 K09103••.

Faston connectors, 1 x 6.35 or 2 x 2.8

In the references selected above, insert a figure 7 before the voltage code.

Example: LC1 K0910•• becomes LC1 K09107••.

Solder pins for printed circuit boards

In the references selected above, insert a figure 5 before the voltage code.

Example: LC1 K0910•• becomes LC1 K09105••.

3 or 4-pole silent contactors (1)

Recommended for use in areas sensitive to noise, high interference mains supplies, etc.
Coil with rectifier incorporated, suppressor fitted as standard.

Screw clamp connections

20	3	—	1 — LC7 K0910•• or LC7 K1210••	0.225
	3	—	— 1 LC7 K0901•• or LC7 K1201••	0.225
	4	—	— — LC7 K09004•• or LC7 K12004••	0.225
	2	2	— — LC7 K09008••	0.225

Faston connectors, 1 x 6.35 or 2 x 2.8

In the references selected above, insert a figure 7 before the voltage code.

Example: LC7 K0910•• becomes LC7 K09107••.

Solder pins for printed circuit boards

In the references selected above, insert a figure 5 before the voltage code.

Example: LC7 K0910•• becomes LC7 K09105••.

(1) Selection between 9 and 12 A ratings according to number of operating cycles, see AC-1 curve on page 5/198.

(2) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply

Contactors LC1 K (0.8...1.15 Uc) (0.85...1.1 Uc)

Volts	12	20	24 (3)	36	42	48	110	115	120	127	200/208	220/230	230	230/240
50/60 Hz	J7	Z7	B7	C7	D7	E7	F7	FE7	G7	FC7	L7	M7	P7	U7
Volts	256	277	380/400	400	400/415	440	480	500	575	600	660/690			
50/60 Hz	W7	UE7	Q7	V7	N7	R7	T7	S7	SC7	X7	Y7			

Up to and including 240 V, coil with integral suppression device available: add 2 to the code required. Example: J72.

Contactors LC7 K (0.8...1.1 Uc)

Volts	24	42	48	110	115	220	230/240
50/60 Hz	B7	D7	E7	F7	FE7	M7	U7

(3) For mains supplies with a high level of interference (voltage surge > 800 V), use a suppressor module LA4 KE1FC (50...129 V) or LA4 KE1UG (130...250 V), see page 5/24.

Selection :
pages 5/198 and 5/199

Characteristics :
pages 5/10 to 5/13

Dimensions :
page 5/26

Schemes :
page 5/27

References

TeSys contactors

Contactors for control in category AC-1, 20 A
Control circuit: d.c. or low consumption



LC1 K09004••



LC1 K09103••



LC1 K09105••



LC1 K09004••

Contactor selection according to utilisation category, see pages 5/198 and 5/199.

Mounting on 35 mm rail or Ø 4 screw fixing.

Screws in the open "ready-to-tighten" position.

Add-on auxiliary contact blocks and accessories, see pages 5/22 to 5/25.

3 and 4-pole contactors, d.c. supply (1)

Non-inductive loads Category AC-1 Maximum current at $\theta \leq 50^\circ\text{C}$	Number of poles	Instantaneous auxiliary contacts	Basic reference, to be completed by adding the voltage code (2) (3)	Weight
A				
Screw clamp connections				
20	3	— 1 —	LP1 K0910•• or LP1 K1210••	0.225
	3	— — 1	LP1 K0901•• or LP1 K1201••	0.225
	4	— — —	LP1 K09004•• or LP1 K12004••	0.225
	2	2 — —	LP1 K09008••	0.225

Spring terminal connections

In the references selected above, insert a figure 3 before the voltage code.

Example: LP1 K0910•• becomes LP1 K09103••.

Faston connectors, 1 x 6.35 or 2 x 2.8

In the references selected above, insert a figure 7 before the voltage code.

Example: LP1 K0910•• becomes LP1 K09107••.

Solder pins for printed circuit boards

In the references selected above, insert a figure 5 before the voltage code.

Example: LP1 K0910•• becomes LP1 K09105••.

3 or 4-pole low consumption contactors (1)

Compatible with programmable controller outputs.

LED indicator incorporated (except models LP4 K••••FW3 and LP4 K••••GW3).

Wide range coil (0.7...1.30 Uc), suppressor fitted as standard, consumption 1.8 W.

Screw clamp connections

20	3	— 1 —	LP4 K0910•••• or LP4 K1210••••	0.235
	3	— — 1	LP4 K0901•••• or LP4 K1201••••	0.235
	4	— — —	LP4 K09004•••• or LP4 K12004••••	0.235
	2	2 — —	LP4 K09008••••	0.235

Spring terminal connections

In the references selected above, insert a figure 3 before the voltage code.

Example: LP4 K0910•• becomes LP4 K09103••.

Faston connectors, 1 x 6.35 or 2 x 2.8

In the references selected above, insert a figure 7 before the voltage code.

Example: LP4 K0910•• becomes LP4 K09107••.

Solder pins for printed circuit boards

In the references selected above, insert a figure 5 before the voltage code.

Example: LP4 K0910•• becomes LP4 K09105••.

(1) Selection between 9 and 12 A ratings according to number of operating cycles, see AC-1 curve on page 5/198.

(2) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

d.c. supply (contactors LP1 K: 0.8°1.15 Uc)

Volts	12	20	24 (3)	36	48	60	72	100	110	125	155	174	200	220	230	240	250
Code	JD	ZD	BD	CD	ED	ND	SD	KD	FD	GD	PD	QD	LD	MD	MPD	MUD	UD

Coil with integral suppression device available: add 3 to the code required. Example: JD3.

Low consumption (contactors LP4 K: 0.7°130 Uc)

Volts	12	20	24	48	72	110	120
Code	JW3	ZW3	BW3	EW3	SW3	FW3	GW3

(3) For LP1 K only, when connecting an electronic sensor or timer in series with the contactor coil, select a 20 V coil (\sim control circuit voltage code Z7, \perp control circuit voltage code ZD) so as to compensate for the incurred voltage drop.

References

TeSys contactors

Reversing contactors for motor control, 6 to 16 A in category AC-3 and 6 to 12 A in category AC-4
Control circuit: a.c.

Reversing contactor selection according to utilisation category, see pages 5/194 to 5/197 and 5/200 to 5/203. Integral mechanical interlock.


It is essential to link the contacts of the electrical interlock.

Pre-wired power circuit connections as standard on screw clamp versions.


Mounting on 35 mm → rail or Ø 4 screw fixing. Screws in the open "ready-to-tighten" position.

Add-on auxiliary contact blocks and accessories, see pages 5/22 to 5/25.

3-pole reversing contactors for standard applications



LC2 K091000



LC2 K091050

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3	Rated operational current in category AC-3 440V up to	Instantaneous auxiliary contacts per contactor	Basic reference, to be completed by adding the voltage code (1) (2)	Weight
220 V 380 V 440/500 V 230 V 415 V 660/690 V				
kW kW kW	A			kg
1.5 2.2 3	6	1 – – 1	LC2 K061000	0.390
2.2 4 4	9	1 – – 1	LC2 K091000	0.390
3 5.5 4 (> 440) 5.5 (440)	12	1 – – 1	LC2 K121000 LC2 K120100	0.390
4 7.5 4 (> 440) 5.5 (440)	16	1 – – 1	LC2 K161000 LC2 K160100	0.390

Spring terminal connections

For 6 to 12 A ratings only, in the references selected above, insert a figure 3 before the voltage code.

Example: LC2 K061000 becomes LC2 K0610300.

Faston connectors, 1 x 6.35 or 2 x 2.8

For 6 to 16 A ratings, in the references selected above, insert a figure 7 before the voltage code.

Example: LC2 K061000 becomes LC2 K0610700.

Solder pins for printed circuit boards

For 6 to 16 A ratings, in the references selected above, insert a figure 5 before the voltage code.

Example: LC2 K061000 becomes LC2 K0610500.

3-pole silent reversing contactors

Recommended for use in areas sensitive to noise, high interference mains supplies, etc.

Coil with rectifier incorporated, suppressor fitted as standard.

Screw clamp connections

1.5 2.2 3	6	1 – – 1	LC8 K061000	0.480
2.2 4 4	9	1 – – 1	LC8 K091000	0.480
3 5.5 4 (> 440) 5.5 (440)	12	1 – – 1	LC8 K121000 LC8 K120100	0.480
4 7.5 4 (> 440) 5.5 (440)	16	1 – – 1	LC8 K161000 LC8 K160100	0.480

Faston connectors, 1 x 6.35 or 2 x 2.8

In the references selected above, insert a figure 7 before the voltage code.

Example: LC8 K061000 becomes LC8 K0610700.

Solder pins for printed circuit boards

In the references selected above, insert a figure 5 before the voltage code.

Example: LC8 K061000 becomes LC8 K0610500.

(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply

Reversing contactors LC2 K (0.8...1.1 Uc) (0.85...1.1 Uc)

Volts	12	20	24 (2)	36	42	48	110	115	120	127	200/208	220/230	230	230/240
50/60 Hz	J7	Z7	B7	C7	D7	E7	F7	FE7	G7	FC7	L7	M7	P7	U7
Volts	256	277	380/400		400	400/415		440	480	500	575	600	660/690	
50/60 Hz	W7	UE7	Q7		V7	N7		R7	T7	S7	SC7	X7	Y7	

Up to and including 240 V, coil with integral suppression device available: add 2 to the code required. Example: J72

Reversing contactors LC8 K (0.8...1.1 Uc)

Volts	24	42	48	110	115	220	230/240
50/60 Hz	B7	D7	E7	F7	FE7	M7	U7

(2) For mains supplies with a high level of interference (voltage surge > 800 V), use a suppressor module LA4 KE1FC (50...129 V) or LA4 KE1UG (130...250 V), see page 5/24.

Selection :
pages 5/194 to 5/203

Characteristics :
pages 5/10 to 5/13

Dimensions :
page 5/28

Schemes :
page 5/29

References

TeSys contactors

Reversing contactors for control
in category AC-1, 20 A
Control circuit: a.c.

Warning: reversing contactors LC2 K0910•• and LC2 K0901•• are pre-wired for reverse motor operation as standard.

Reversing contactor selection according to utilisation category, see pages 5/198 and 5/199.

Integral mechanical interlock.

It is essential to link the contacts of the electrical interlock.

Mounting on 35 mm — rail or Ø 4 screw fixing.

Screws in the open "ready-to-tighten" position.

Add-on auxiliary contact blocks and accessories, see pages 5/22 to 5/25.



LC2 K0910••



LC2 K09105••

5

3 or 4-pole reversing contactors for standard applications (1)

Non-inductive loads Category AC-1 Maximum current at $\theta \leq 50^\circ\text{C}$	Number of poles	Instantaneous auxiliary contacts per contactor	Basic reference, to be completed by adding the voltage code (2) (3)	Weight kg
A				
Screw clamp connections				
20	3 — 1 —		LC2 K0910•• or LC2 K1210••	0.390
	3 — — 1		LC2 K0901•• or LC2 K1201••	0.390
	4 — — —		LC2 K09004•• or LC2 K12004••	0.380
				0.380

Spring terminal connections

In the references selected above, insert a figure 3 before the voltage code.

Example: LC2 K0910•• becomes LC2 K09103••.

Faston connectors, 1 x 6.35 or 2 x 2.8

In the references selected above, insert a figure 7 before the voltage code.

Example: LC2 K0910•• becomes LC2 K09107••.

Solder pins for printed circuit boards

In the references selected above, insert a figure 5 before the voltage code.

Example: LC2 K0910•• becomes LC2 K09105••.

3 or 4-pole silent reversing contactors (1)

Recommended for use in areas sensitive to noise, high interference mains supplies, etc.

Coil with rectifier incorporated, suppressor fitted as standard.

Screw clamp connections

20	3 — 1 —	LC8 K0910•• or LC8 K1210••	0.480
	3 — — 1	LC8 K0901•• or LC8 K1201••	0.480
	4 — — —	LC8 K09004•• or LC8 K12004••	0.470
			0.470

Faston connectors, 1 x 6.35 or 2 x 2.8

In the references selected above, insert a figure 7 before the voltage code.

Example: LC8 K0910•• becomes LC8 K09107••.

Solder pins for printed circuit boards

In the references selected above, insert a figure 5 before the voltage code.

Example: LC8 K0910•• becomes LC8 K09105••.

(1) Selection between 9 and 12 A ratings according to number of operating cycles, see AC-1 curve on page 5/198.

(2) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply

Reversing contactors LC2 K (0.8...1.15 Uc) (0.85...1.1 Uc)

Volts	12	20	24 (3)	36	42	48	110	115	120	127	200/208	220/230	230	230/240
50/60 Hz	J7	Z7	B7	C7	D7	E7	F7	FE7	G7	FC7	L7	M7	P7	U7
	256	277	380/400		400	400/415	440	480	500	575	600	660/690		
50/60 Hz	W7	UE7	Q7		V7	N7	R7	T7	S7	SC7	X7	Y7		

Up to and including 240 V, coil with integral suppression device available: add 2 to the code required. Example: J72.

Reversing contactors LC8 K (0.8...1.1 Uc)

Volts	24	42	48	110	115	220	230/240
50/60 Hz	B7	D7	E7	F7	FE7	M7	U7

(3) For mains supplies with a high level of interference (voltage surge > 800 V), use a suppressor module LA4 KE1FC (50...129 V) or LA4 KE1UG (130...250 V), see page 5/24.

Selection :
pages 5/198 and 5/199

Characteristics :
pages 5/10 to 5/13

Dimensions :
page 5/28

Schemes :
page 5/29

5/20

Schneider
Electric

References

TeSys contactors

Reversing contactors for control
in category AC-1, 20 A
Control circuit: d.c. or low consumption

Warning: reversing contactors LP2 K0910•• and LP2 K0901•• are pre-wired for reverse motor operation as standard.
Reversing contactor selection according to utilisation category, see pages 5/198 and 5/199.

Integral mechanical interlock.

It is essential to link the contacts of the electrical interlock.

Mounting on 35 mm — rail or Ø 4 screw fixing.

Screws in the open "ready-to-tighten" position.

Add-on auxiliary contact blocks and accessories, see pages 5/22 to 5/25.

3 or 4-pole reversing contactors, d.c. supply (1)

Non-inductive loads Category AC-1 Maximum current at $\theta \leq 50^\circ\text{C}$	Number of poles	Instantaneous auxiliary contacts per contactor	Basic reference, to be completed by adding the voltage code (2) (3)	Weight
A				kg
Screw clamp connections				
20	3 — 1 —		LP2 K0910•• or LP2 K1210••	0.480
	3 — — 1		LP2 K0901•• or LP2 K1201••	0.480
	4 — — —		LP2 K09004•• or LP2 K12004••	0.480
				0.480
Spring terminal connections				
In the references selected above, insert a figure 3 before the voltage code. Example: LP2 K0910•• becomes LP2 K09103••.				

Faston connectors, 1 x 6.35 or 2 x 2.8

In the references selected above, insert a figure 7 before the voltage code.
Example: LP2 K0910•• becomes LP2 K09107••.

Solder pins for printed circuit boards

In the references selected above, insert a figure 5 before the voltage code.
Example: LP2 K0910•• becomes LP2 K09105••.

3 or 4-pole low consumption reversing contactors (1)

Compatible with programmable controller outputs.
LED indicator incorporated (except models LP5 K••••FW3 and LP5 K••••GW3).
Wide range coil (0.7...1.30 Uc), suppressor fitted as standard, consumption 1.8 W.

Screw clamp connections

20	3 — 1 —	LP5 K0910•••• or LP5 K1210••••	0.490
	3 — — 1	LP5 K0901•••• or LP5 K1201••••	0.490
	4 — — —	LP5 K09004•••• or LP5 K12004••••	0.490
			0.490

Spring terminal connections

In the references selected above, insert a figure 3 before the voltage code.
Example: LP5 K0910•• becomes LP5 K09103••.

Faston connectors, 1 x 6.35 or 2 x 2.8

In the references selected above, insert a figure 7 before the voltage code.
Example: LP5 K0910•• becomes LP5 K09107••.

Solder pins for printed circuit boards

In the references selected above, insert a figure 5 before the voltage code.
Example: LP5 K0910•• becomes LP5 K09105••.

(1) Selection between 9 and 12 A ratings according to number of operating cycles, see AC-1 curve on page 5/198.
(2) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

d.c. supply (reversing contactors LP2 K: 0.8...1.15 Uc)

Volts ...	12	20	24 (3)	36	48	60	72	100	110	125	155	174	200	220	230	240	250
Code	JD	ZD	BD	CD	ED	ND	SD	KD	FD	GD	PD	QD	LD	MD	MPD	MUD	UD

Coil with integral suppression device available: add 3 to the code required. Example: JD3.

Low consumption (reversing contactors LP5 K: 0.7...130 Uc)

Volts ...	12	20	24	48	72	110	120
Code	JW3	ZW3	BW3	EW3	SW3	FW3	GW3

(3) For LP2 K only, when connecting an electronic sensor or timer in series with the contactor coil, select a 20 V coil (\sim control circuit voltage code Z7, == control circuit voltage code ZD) so as to compensate for the incurred voltage drop.

Selection :
pages 5/198 and 5/199


Characteristics :
pages 5/10 to 5/13

Dimensions :
page 5/28

Schemes :
page 5/29

Schneider
Electric

5/21

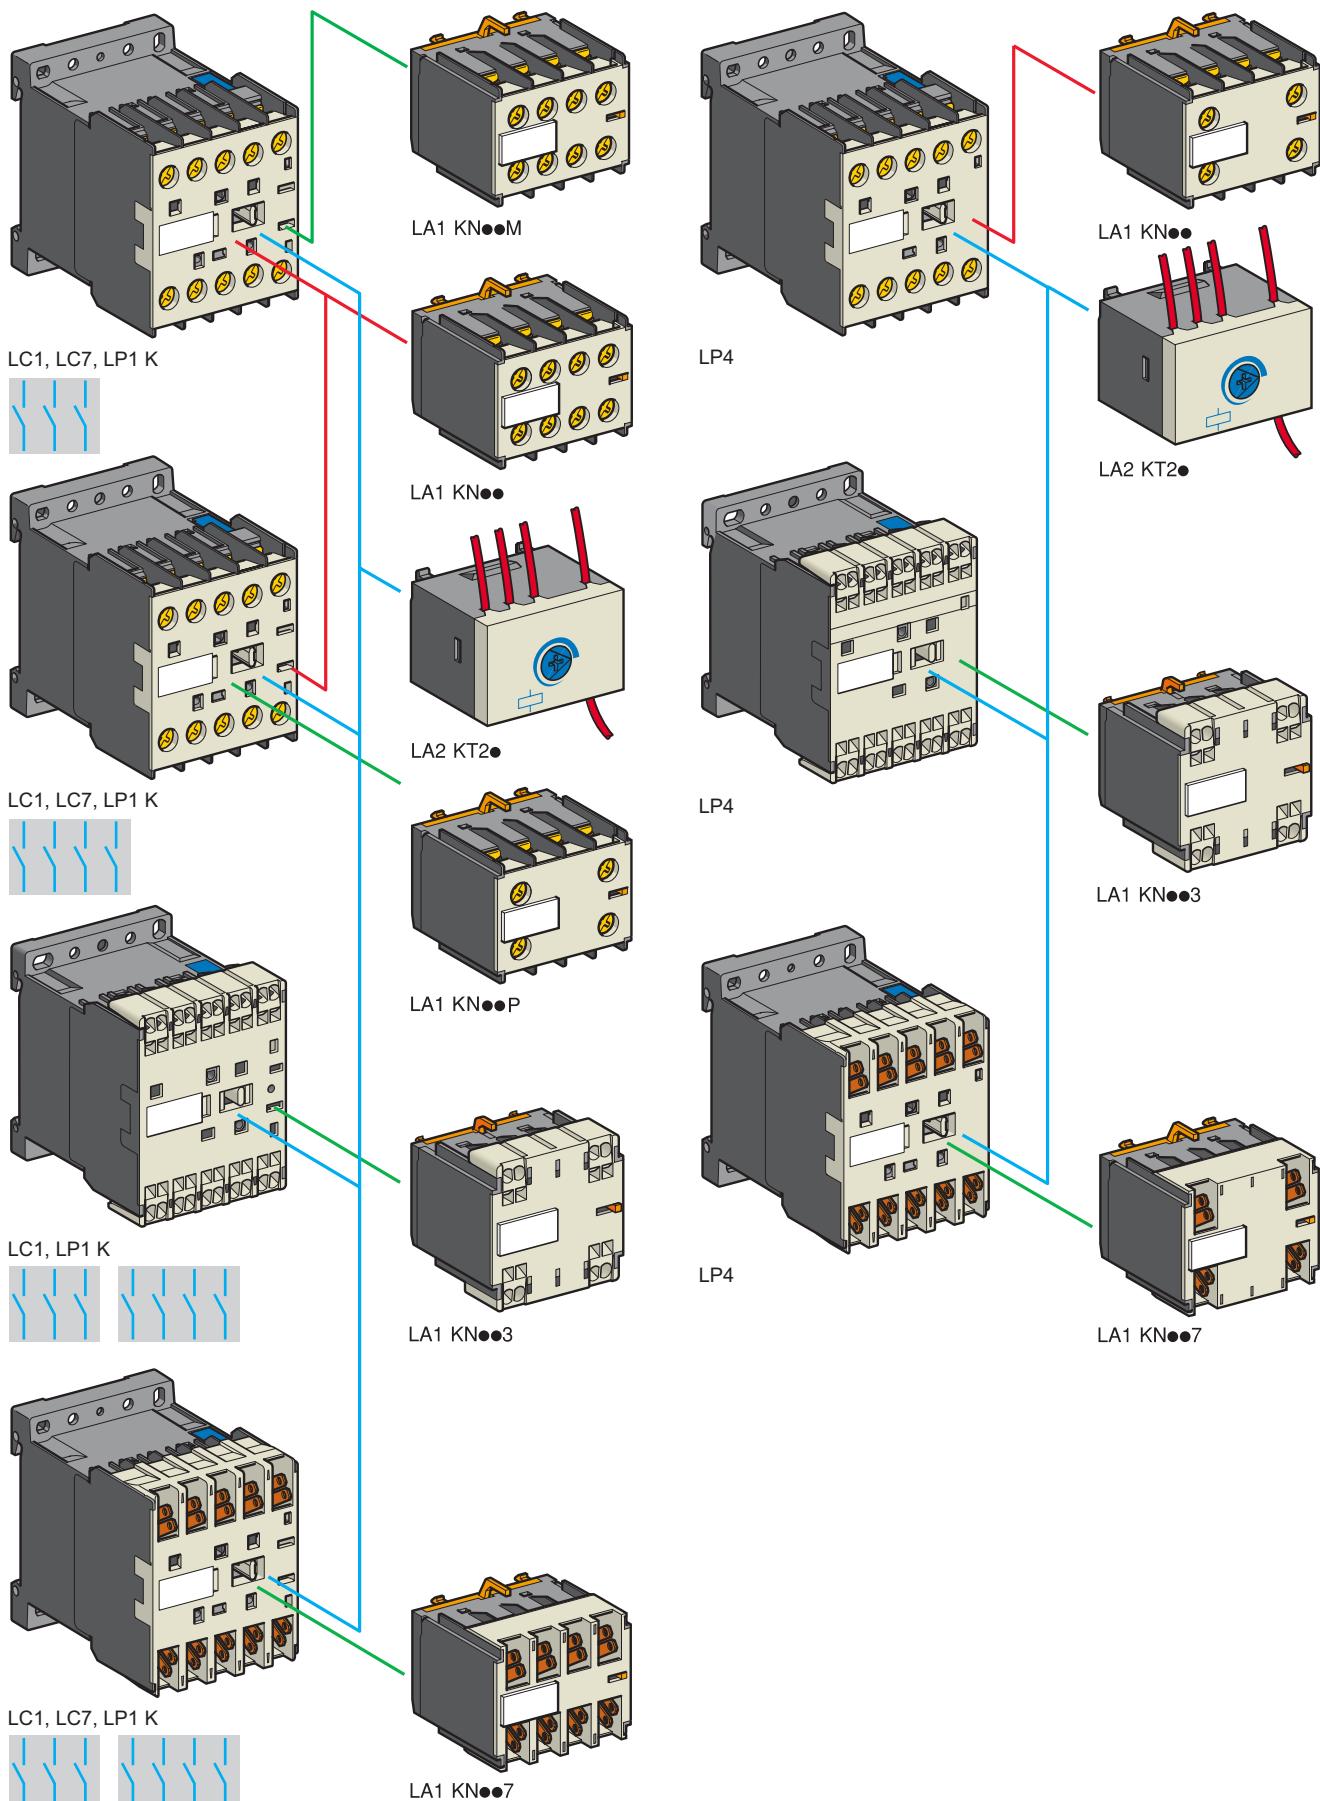

References

TeSys contactors

TeSys K contactors and reversing contactors
Auxiliary contact blocks

Instantaneous auxiliary contact blocks

Recommended for standard applications. Clip-on front mounting, 1 block per contactor

Connection	For use on contactors	Composition	Reference	Weight
				kg
Screw clamp terminals	All products with screw clamp terminals	2 — — 1	LA1 KN20 LA1 KN02 LA1 KN11	0.045 0.045 0.045
	except low consumption	4 3 2 1 —	LA1 KN40 LA1 KN31 LA1 KN22 LA1 KN13 LA1 KN04	0.045 0.045 0.045 0.045 0.045
Spring terminals	All products with spring terminals	2 — 1	LA1 KN203 LA1 KN023 LA1 KN113	0.045 0.045 0.045
	except low consumption	4 3 2 1 —	LA1 KN403 LA1 KN313 LA1 KN223 LA1 KN133 LA1 KN043	0.045 0.045 0.045 0.045 0.045
Faston connectors, 1 x 6.35 or 2 x 2.8	All products with Faston connectors	2 — 1	LA1 KN207 LA1 KN027 LA1 KN117	0.045 0.045 0.045
	except low consumption	4 3 2 1 —	LA1 KN407 LA1 KN317 LA1 KN227 LA1 KN137 LA1 KN047	0.045 0.045 0.045 0.045 0.045

With terminal referencing to standard EN 50012. Clip-on front mounting, 1 block per contactor

Screw clamp terminals with referencing conforming to standard EN 50012	All 3-pole + N/O products with screw clamp terminals except LP4 and LP5 K12	— 1	2	LA1 KN02M LA1 KN11M	0.045 0.045
	All 3-pole + N/O products with screw clamp terminals except LP4 or LP5 K06, K09 and K12	3 2 1	1 2 3	LA1 KN31M LA1 KN22M LA1 KN13M	0.045 0.045 0.045
	All 4-pole products with screw clamp terminals except LP4 or LP5 K12	1	1	LA1 KN11P	0.045
	All 4-pole products with screw clamp terminals except LP4 or LP5 K09 and K12	2	2	LA1 KN22P	0.045

Electronic time delay auxiliary contact blocks

Relay output with common point changeover contact, ~ or == 240 V, 2 A maximum.

Control voltage 0.85...1.1 Uc.

Maximum switching capacity 250 VA or 150 W.

Operating temperature -10...+ 60 °C.

Reset time: 1.5 s during the time delay period, 0.5 s after the time delay period.


Clip-on front mounting, 1 block per contactor

Voltage	Type	Timing range	Composition	Reference	Weight
V	s				kg
~ or == 24...48	On-delay	1...30	1	LA2 KT2E	0.040
~ 110...240	On-delay	1...30	1	LA2 KT2U	0.040

References

TeSys contactors

TeSys K contactors and reversing contactors
Suppressor modules incorporating LED indicator

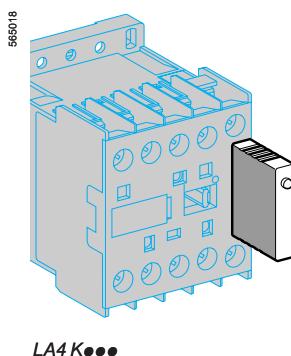

LA4 KE***



References					
Mounting and connection	Type	For voltages	Sold in lots of	Unit reference	Weight kg
Clip-on fixing on the front of contactors LC1 and LP1, with locating device. No tools required.	Varistor (1)	~ and == 12...24 V	5	LA4 KE1B	0.010
		~ and == 32...48 V	5	LA4 KE1E	0.010
		~ and == 50...129 V	5	LA4 KE1FC	0.010
		~ and == 130...250 V	5	LA4 KE1UG	0.010
	Diode + Zener diode (2)	== 12...24 V	5	LA4 KC1B	0.010
		== 32...48 V	5	LA4 KC1E	0.010
	RC (3)	~ 110...250 V	5	LA4 KA1U	0.010

- (1) Protection provided by limiting the transient voltage to 2 Uc max.
Maximum reduction of transient voltage peaks.
Slight increase in drop-out time (1.1 to 1.5 times the normal time).
(2) No overvoltage or oscillating frequency.
Polarised component.
Slight increase in drop-out time (1.1 to 1.5 times the normal time).
(3) Protection by limiting the transient voltage to 3 Uc max. and limitation of the oscillating frequency.
Slight increase in drop-out time (1.2 to 2 times the normal time).

References

TeSys contactors

TeSys K contactors and reversing contactors
Accessories

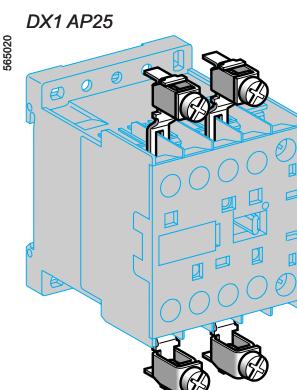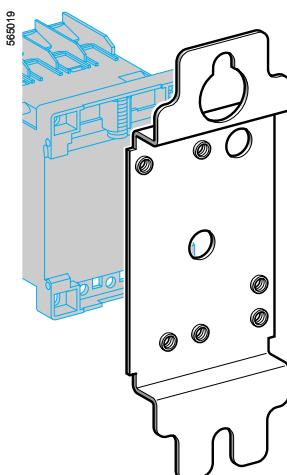

LA9 E01

Mounting and marking accessories

Description	Application	Sold in lots of	Unit reference	Weight kg	
Mounting plates (1)	For fixing on 1 ↗ rail	Clip-on	1	LA9 D973	
	For fixing on 2 ↗ rails fixing centres	110/120 mm 10	DX1 AP25	0.065	
Marker holder	Clip-on	Onto front of contactor	100	LA9 D90	0.001
Clip-in markers	4 maximum per contactor	Strips of 10 identical numbers 0...9	25	AB1 P• (2)	0.002
		Strips of 10 identical letters A...Z	25	AB1 G• (2)	0.002

Connection accessories

Description	Application	Sold in lots of	Unit preference	Weight kg	
Paralleling links	For 2 poles	With screw clamps	4	LA9 E01	
	For 4 poles	With screw clamps	2	LA9 E02	
Set of 6 power connections	For 3-pole reversing contactors for motor control	For contactors with screw clamp terminals	100	LA9 K0969	0.010
Set of 4 power connections	For 4-pole changeover contactor pairs	For contactors with screw clamp terminals	100	LA9 K0970	0.010

(1) Order 1 mounting plate for fixing a contactor and 2 mounting plates for fixing a reversing contactor.
(2) Complete the reference by replacing the dot with the required character.



*Dimensions,
mounting*

TeSys contactors
TeSys K contactors



Contactors

LC1 K, LC7 K, LP1 K, LP4 K

On panel







On mounting rail AM1 DP200 or AM1 DE200 (< 35 mm)




LA9 D973

On one asymmetrical rail DZ5 MB with clip-on mounting plates



5




On printed circuit board



Electronic time delay contact blocks

LA2 KT




On contactor



Suppressor modules

LA4 K•

On contactor LC1 K or LP1 K



Characteristics :
pages 5/10 to 5/13

References :
pages 5/14 to 5/17

Schemes :
page 5/27

5/26


Schneider
Electric

Schemes


TeSys contactors TeSys K reversing contactors

3-pole contactors

3 P + N/O




3 P + N/C




4-pole contactors

4 P




2 P N/O + 2 P N/C




With integral suppression device

LC7 K




LP4 K




Instantaneous auxiliary contacts LA1 K

LA1 KN20, KN207, KN203




LA1 KN02, KN027, KN023



LA1 KN11, KN117, KN113




LA1 KN40, KN407, KN403




LA1 KN31, KN317, KN313




LA1 KN22, KN227, KN223



LA1 KN13, KN137, KN133




LA1 KN04, KN047, KN043




Terminal referencing conforming to standard EN 50012


LA1 KN02M




LA1 KN11M




LA1 KN31M




LA1 KN22M




LA1 KN13M



LA1 KN11P




LA1 KN22P



Electronic time delay contact blocks


LA2 KT

1 C/O




Suppressor modules

LA4 KC

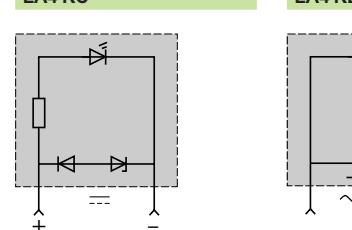

LA4 KE



Characteristics :
pages 5/10 to 5/13

References :
pages 5/14 to 5/17

Dimensions :
page 5/26

Schneider
Electric

5/27

Dimensions, mounting


TeSys contactors TeSys K reversing contactors

Reversing contactors

LC2 K, LC8 K, LP2 K, LP5 K


On panel

On mounting rail AM1 DP200 or AM1 DE200 (\perp 35 mm)

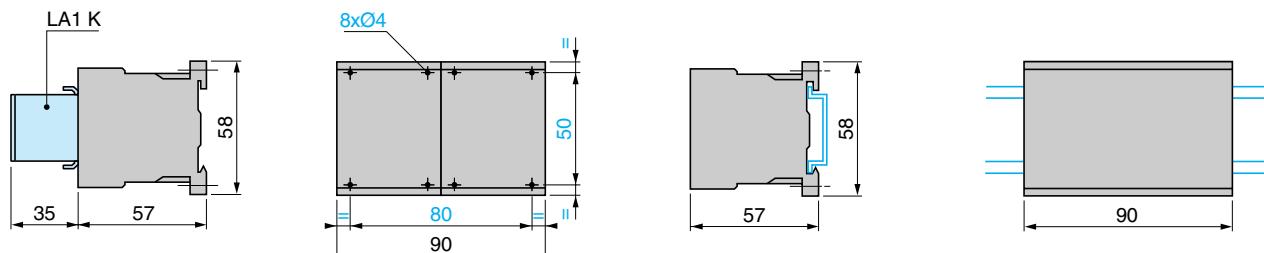


2 x LA9 D973

On one asymmetrical mounting rail DZ5 MB with 2 clip-on mounting plates LA9 D973 or on 2 mounting plates DX1 AP25.

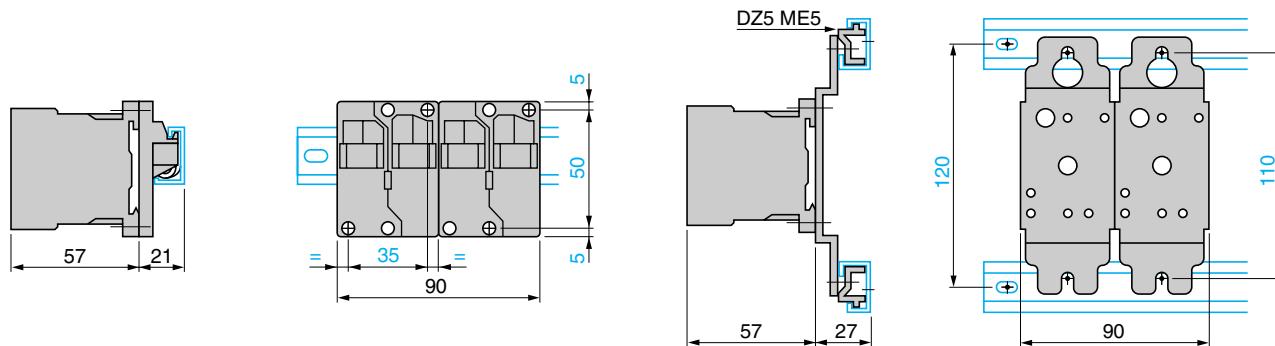

5


On printed circuit board for reversing contactors or 2 contactors mounted side by side

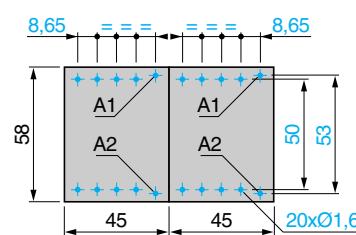

Electronic time delay contact blocks

LA2 KT

On reversing contactors

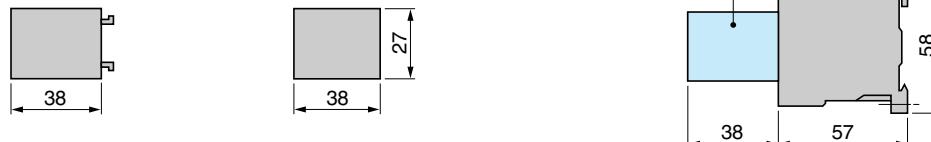

Suppressor modules

LA4 K*

On reversing contactors LC2 K or LP2 K



Characteristics :
pages 5/10 to 5/13

References :
pages 5/18 to 5/21

Schemes :
page 5/29

5/28

Schneider
Electric

Schemes


TeSys contactors

TeSys K reversing contactors


3-pole reversing contactors

With screw clamp connections

3 P + N/O

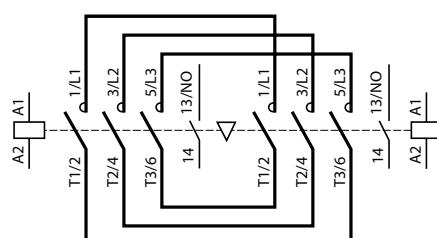


3 P + N/C

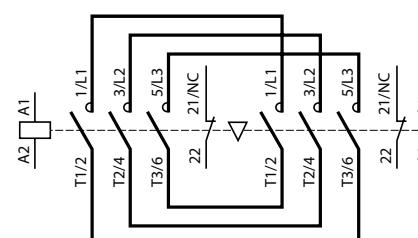

With integral suppression device


LC8 K

LP5 K




With Faston connectors or solder pins (printed circuit board)

3 P + N/O

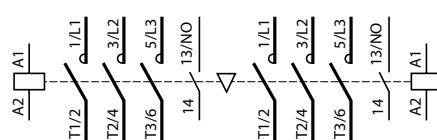


3 P + N/C

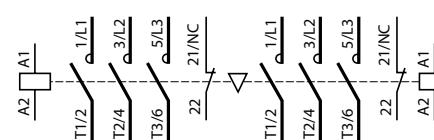

4-pole reversing contactors


With screw clamp connections

4 P

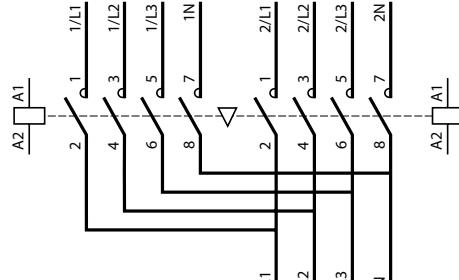

With Faston connectors or solder pins (printed circuit board)


4 P

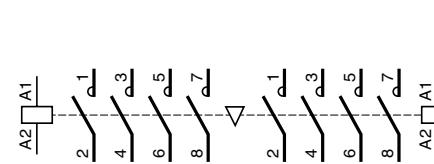

Integral suppression device

LC8 K


LP5 K



Instantaneous auxiliary contacts LA1 K

LA1 KN20, KN207, KN203

2 N/O




LA1 KN02, KN027, KN023

2 N/C



LA1 KN11, KN117, KN113


1 N/O + 1 N/C



Terminal referencing conforming to standard EN 50012

LA KN02M

2 N/C



LA1 KN11M

1 N/O + 1 N/C




LA1 KN11P

1 N/O + 1 N/C




LA1 KN40, KN407, KN403

4 N/O




LA1 KN31, KN317, KN313

3 N/O + 1 N/C




LA1 KN22, KN227, KN223

2 N/O + 2 N/C




LA KN13, KN137, KN133

1 N/O + 3 N/C



LA1 KN04, KN047, KN043


4 N/C



Electronic time delay contact blocks


LA2 KT

1 C/O




Suppressor modules

LA4 KC



LA4 KE



Characteristics :
pages 5/10 to 5/13

References :
pages 5/18 to 5/21

Dimensions :
page 5/28

Schneider
Electric

5/29

Characteristics

TeSys contactors

Mini-contactors TeSys LC1 SK and LP1 SK

Environment

Rated insulation voltage (Ui)	Conforming to 60947, VDE 0110 gr C, BS 5424, CSA 22-2 n° 14, UL 508	V	690	
Conforming to standards	IEC 60947, NF C 63-110, VDE 0660, BS 5424			
Approvals	UL, CSA			
Protective treatment	Conforming to IEC 60068 (DIN 50015)	"TC" (Klimafest, Climateproof)		
Degree of protection	Conforming to VDE 0106	Protection against direct finger contact		
Ambient air temperature around the device	Storage	°C	- 50...+ 70	
	Operation	°C	- 20...+ 50	
Maximum operating altitude	Without derating	m	2000	
Operating position		Vertical axis		
		Horizontal axis		
		Without derating		
		Without derating		
Cabling, screw clamp terminals	Solid conductor	mm²	Min Max	
			1 x 1.5 or 2 x 1.5 1 x 6 or 2 x 4	
	Flexible cable without cable end	mm²	1 x 0.5 or 2 x 0.35 1 x 6 or 2 x 2.5	
	Flexible cable with cable end	mm²	1 x 0.35 or 2 x 0.35 1 x 6 or 2 x 1.5	
Tightening torque	Pozidriv n° 1 head	N.m	0.8	
Terminal referencing	Conforming to standards En 50005			

Characteristics (continued)

TeSys contactors

Mini-contactors TeSys LC1 SK and LP1 SK

Pole characteristics

Conventional thermal current (I _{th})	For ambient temperature ≤ 55 °C	A	12
Rated operational frequency		Hz	50/60
Frequency limits of the operational current		Hz	Up to 400
Rated operational voltage (U _e)		V	690
Rated making capacity	I rms conforming to NF C 63-110 and IEC 60947	A	66
Rated breaking capacity (for U _e ≤ 400 V)	Conforming to NF C 63-110 and IEC 60947 (I rms)	A	52
Short time rating	In free air for a time "t" from cold state (θ ≤ 55 °C)	A	50
Short-circuit protection	gl fuse U ≤ 440 V	A	16
Average impedance per pole	At I _{th} and 50 Hz	mΩ	4
Maximum rated operational current			
For a temperature ≤ 55 °C	AC-3 (1) (U _e ≤ 400 V)	A	6
	AC-1	A	12
Utilisation in category AC-1 resistive circuits, heating, lighting (U _e ≤ 440 V)	Increase in operational current by paralleling of poles	A	20

Auxiliary contact characteristics of add-on blocks

Rated operational voltage (U _e)	Up to	V	690
Rated insulation voltage (U _i)	Conforming to IEC 60947, BS 5424, VDE 0110 group C, CSA C 22-2 n° 14	V	690
Conventional thermal current (I _{th})	For ambient temperature ≤ 55 °C	A	10
Frequency of operational current		Hz	Up to 400
Short-circuit protection	Conforming to IEC 60947 and VDE 0660, gl fuse	A	10

Operational power of contacts conforming to IEC 60947

a.c. supply, category AC-15

Electrical durability (valid up to 3600 operating cycles per hour) on an inductive load such as the coil of an electromagnet: making current ($\cos \phi 0.7$) = 10 times the breaking current ($\cos \phi 0.4$).

			110/	220/	380/		
	V	24	48	127	230	400	440
1 million operating cycles	VA	48	96	240	440	800	880
3 million operating cycles	VA	17	34	86	158	288	317
10 million operating cycles	VA	7	14	36	66	120	132
Occasional making capacity	VA	1000	2050	5000	10000	14000	13000

(1) For LC1 contactors.

d.c. supply, category DC-13

Electrical durability (valid up to 1200 operating cycles per hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the load.

	V	24	48	110	220	440
	W	120	80	60	52	51
	W	55	38	30	28	26
	W	15	11	9	8	7
	W	720	600	400	300	230

Characteristics (continued)

TeSys contactors

Mini-contactors TeSys LC1 SK and LP1 SK

Control circuit characteristics

Type		LC1 SK06	LP1 SK06
Rated control circuit voltage (Uc)	V	~ 24...400	— 12...72
Control voltage limits (θ ≤ 50 °C)	For operation	0.85...1.1 Uc	0.85...1.1 Uc
	For drop-out	≥ 0.20 Uc	≥ 0.10 Uc
Average coil consumption at 20 °C and at Uc	Inrush	16 VA	2.2 W
	Sealed	4.2 VA	2.2 W
Heat dissipation	W	1.4	2.2
Operating time at 20 °C and at Uc			
Between coil energisation and	opening of the N/C contacts	ms 8...16	10...18
	closing of the N/O contacts	ms 7...14	8...12
Between coil de-energisation and	opening of the N/O contacts	ms 6...8	4...6
	closing of the N/C contacts	ms 8...10	6...8
Maximum operating rate	In operating cycles per hour	1200	1200
Mechanical durability at Uc In millions of operating cycles	50/60 Hz coil	10	—
	— coil	—	10

Contactor selection guide according to required electrical durability


TeSys contactors

Mini-contactors TeSys LC1 SK and LP1 SK

Use in category AC-3 ($U_e \leq 440$ V)

Control of 3-phase asynchronous squirrel cage motors with breaking whilst running.

The current broken (I_c) in category AC-3 is equal to the rated operational current (I_e) of the motor.

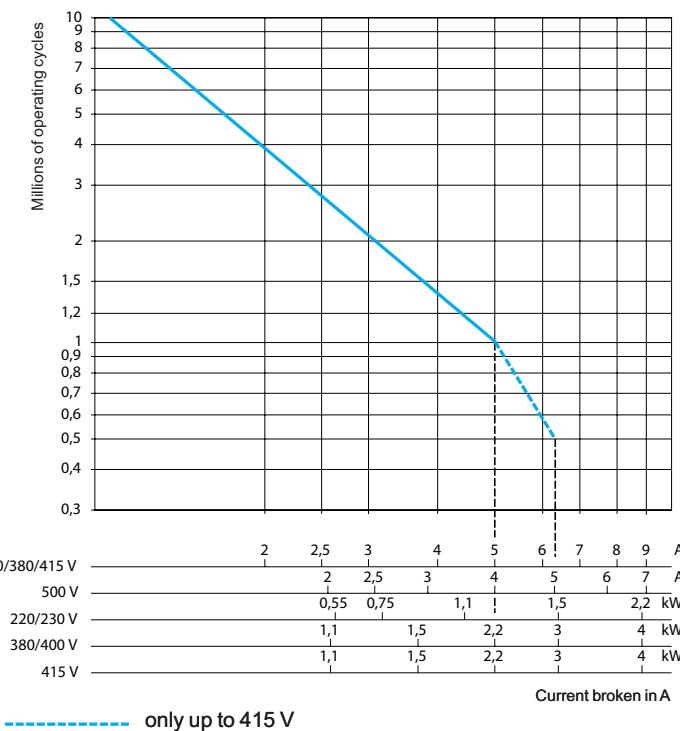


5

Use in category AC-1 ($U_e \leq 440$ V)

Control of resistive circuits ($\cos \varphi \geq 0.95$).

The current broken (I_c) in category AC-1 is equal to the current (I_e) normally drawn by the load.

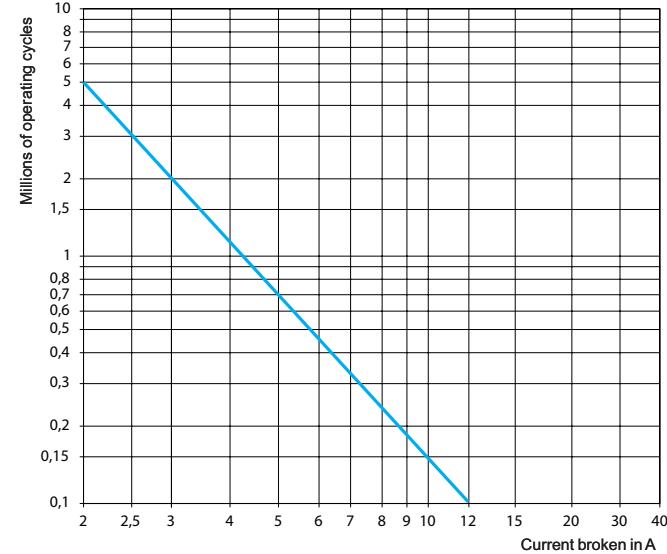

References:
pages 5/34 and 5/35

Dimensions:
page 5/36

Schemes:
page 5/37

Schneider
Electric

5/33

References

TeSys contactors

Mini-contactors TeSys LC1 SK and LP1 SK

- Width of contactor 27 mm.
- Mounting on 35 mm U rail.
- Screw clamp terminals.



LC1 SK06



LA1 SK10

5

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3 (1)				Rated operational voltage in AC-3 up to 400 V	Number of poles	Instantaneous auxiliary contacts	Basic reference. Complete with code indicating control circuit voltage (2)	Weight
kW	kW	kW	A		2	-	LC1 SK0600●●	kg
220 V 230 V	380 V 415 V	660 V 690 V						0.132
1.1	2.2	2.2	6					

Non inductive loads maximum current ($\theta \leq 55^{\circ}\text{C}$) utilisation category AC-1				Control circuit supply	Number of poles	Instantaneous auxiliary contacts	Basic reference. Complete with code indicating control circuit voltage (2)	Weight
A					2	-	LC1 SK0600●●	kg
12		a.c.						0.132
		d.c.			2	-	LP1 SK0600●●	0.132

Add-on block with 1 power pole (for 3-phase circuits)						
For use on contactor		Number of poles	Instantaneous auxiliary contacts	Reference	Weight kg	
LC1 SK06	clip-on front mounting	1	1	-	LA1 SK10	0.022
		1	-	1	LA1 SK01	0.022

Nota : Auxiliary contact blocks and coil suppressor module, see next page.

(1) For use in AC-3 category and 3-phase circuits, an LA1 SK●● auxiliary contact block should be ordered separately for mounting on the contactor.

(2) Standard control circuit voltages (variable delivery times, please consult your Regional Sales Office):

Mini-contactors LC1 SK									
Volts ~ 50/60 Hz	24	48	110	120	220	230	240	380	400
Code	B7	E7	F7	G7	M7	P7	U7	Q7	V7
Mini-contactors LP1 SK									
Volts ---	12	24	36	48	72				
Code	JD	BD	CD	ED	SD				

Characteristics:
pages 5/30 to 5/33

Dimensions:
page 5/36

Schemes:
page 5/37

5/34

Schneider
Electric

References

TeSys contactors

Mini-contactors TeSys LC1 SK and LP1 SK
Instantaneous auxiliary contacts and coil suppressor modules



LA1 SK11



LA4 SK•1•

Instantaneous auxiliary contact blocks

Clip-on front mounting

For use on contactor	Maximum number of blocks per contactor	Composition	Reference	Weight kg
LC1 SK06	1	2	LA1 SK20	0.022
		-	LA1 SK02	0.022
		1	LA1 SK11	0.022

Coil suppressor modules

Clip-on fixing and electrical connection on right-hand side, without use of tools

For use on contactors	Type	For voltages	Sold in lots of	Unit reference	Weight kg
LC1 SK06 and LP1 SK06	Varistor (1)	~ and --- 24 V...48 V	10	LA4 SKE1E	0.003
		~ and --- 110 V...250 V	10	LA4 SKE1U	0.003
	Diode (2)	--- 24 V...250 V	10	LA4 SKC1U	0.003

(1) Protection provided by limiting the transient voltage to 2 Uc max. Maximum reduction of transient voltage peaks. Slight increase in drop-out time (1.1 to 1.5 times the normal time).

(2) No overvoltage or oscillating frequency.

Slight increase in drop-out time (1.1 to 1.5 times the normal time).

Dimensions, mounting


TeSys contactors

Mini-contactors TeSys LC1 SK and LP1 SK

Dimensions

Mini-contactors

LC1 and LP1 SK06

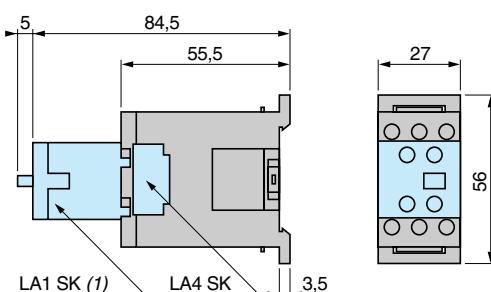


(1) Only on LC1 SK06.

Mounting

Mini-contactors

LC1 and LP1 SK06

On mounting rail AM1 DP200 or AM1 DE200 (\rightarrow 35 mm)

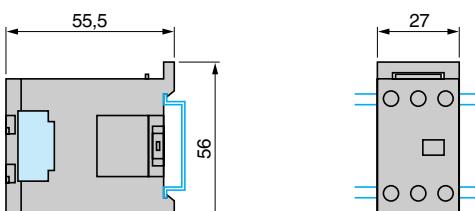

5

Characteristics:
pages 5/30 to 5/33

References:
pages 5/34 and 5/35

Schemes:
page 5/37

5/36

Schneider
Electric

Schemes


TeSys contactors

Mini-contactors TeSys LC1 SK and LP1 SK

Schemes

2-pole mini-contactors

LC1 and LP1 SK06



Add-on power pole block

1 pole + 1 "N/O" aux.

LA1 SK10

1 pole + 1 "N/C" aux.

LA1 SK01



Instantaneous auxiliary contacts

2 "N/O"




LA1 SK20

2 "N/C"

LA1 SK02

1 "N/O" + 1 "N/C"

LA1 SK11



Characteristics:
pages 5/30 to 5/33

References :
pages 5/34 and 5/35

Dimensions:
page 5/36

Schneider
Electric

Characteristics

TeSys contactors

Mini-contactors TeSys LC1 SKGC,
for use in modular panels

Environment

Rated insulation voltage (Ui)	Conforming to IEC 60947, VDE 0110 gr C, BS 5424, CSA 22-2 n° 14, UL 508	V	690															
Conforming to standards	IEC 60947, NF C 63-110, VDE 0660, BS 5424																	
Product certifications	UL, CSA																	
Protective treatment	Conforming to IEC 60068 (DIN 50015)	"TC" (Klimafest, Climateproof)																
Degree of protection	Conforming to VDE 0106	Protection against direct finger contact																
Ambient air temperature around the device																		
Storage	°C	- 50...+ 70																
Operation	°C	- 20...+ 50																
Maximum operating altitude	Without derating	m	2000															
Operating position																		
Cabling, connectors			<table border="1"> <thead> <tr> <th></th> <th>Min.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td>Solid conductor</td> <td>mm²</td> <td>1 x 1.5 or 2 x 1.5</td> <td>1 x 6 or 2 x 4</td> </tr> <tr> <td>Flexible cable without cable end</td> <td>mm²</td> <td>1 x 0.5 or 2 x 0.35</td> <td>1 x 6 or 2 x 2.5</td> </tr> <tr> <td>Flexible cable with cable end</td> <td>mm²</td> <td>1 x 0.35 or 2 x 0.35</td> <td>1 x 6 or 2 x 1.5</td> </tr> </tbody> </table>		Min.	Max.	Solid conductor	mm²	1 x 1.5 or 2 x 1.5	1 x 6 or 2 x 4	Flexible cable without cable end	mm²	1 x 0.5 or 2 x 0.35	1 x 6 or 2 x 2.5	Flexible cable with cable end	mm²	1 x 0.35 or 2 x 0.35	1 x 6 or 2 x 1.5
	Min.	Max.																
Solid conductor	mm²	1 x 1.5 or 2 x 1.5	1 x 6 or 2 x 4															
Flexible cable without cable end	mm²	1 x 0.5 or 2 x 0.35	1 x 6 or 2 x 2.5															
Flexible cable with cable end	mm²	1 x 0.35 or 2 x 0.35	1 x 6 or 2 x 1.5															
Tightening torque	Pozidriv n° 1 head	N.m	0.8															
Terminal referencing			Conforming to standards En 50005															

Characteristics (continued)

TeSys contactors

Mini-contactors TeSys LC1 SKGC,
for use in modular panels

Pole characteristics

Mini-contactor type		LC1 SKGC2	LC1 SKGC3 and LC1 SKGC4
Conventional thermal current (I _{th})	For ambient temperature ≤ 55 °C	A 20	20
Rated operational frequency	Hz	50/60	
Frequency limit of the operational current	Hz	up to 400	
Rated operational voltage (U _e)	V	690	
Rated making capacity	I rms conforming to NF C 63-110 and IEC 60947	A 50	85
Rated breaking capacity (for U _e ≤ 400 V)	Conforming to NF C 63-110 and IEC 60947 (I rms)	A 40	68
Permissible short time rating	In free air for a time "t" from cold state (q ≤ 55 °C)	A 40	60
Short-circuit protection	gl fuse U ≤ 440 V	A 20	20
Average impedance per pole	At I _{th} and 50 Hz	mΩ 4	4
Maximum rated operational current	For temperature ≤ 55 °C	A AC-3 (U _e ≤ 400 V) AC-1	5 20
Use in category AC-1 resistive circuits, heating, lighting (U _e ≤ 440 V)	Increase in rated operational current by paralleling of 2 poles	A 32	32

Auxiliary contact characteristics of mini-contactors

Rated operational voltage (U _e)	Up to	V	690
Rated insulation voltage (U _i)	Conforming to IEC 60947, BS 5424, VDE 0110 group C, CSA C 22-2 n° 14	V	690
Conventional thermal current (I _{th})	For ambient temperature ≤ 55 °C	A	10
Frequency of the operational current	Hz	Up to 400	
Short-circuit protection	Conforming to IEC 60947 and VDE 0660, gl fuse	A	10

Operational power of contacts conforming to IEC 60947

a.c. supply, category AC-15

Electrical durability (valid for up to 3600 operating cycles/hour) on an inductive load such as the coil of an electromagnet: making current ($\cos \phi = 0.7$) = 10 times the power broken ($\cos \phi = 0.4$).

d.c. supply, category DC-13

Electrical durability (valid for up to 1200 operating cycles/hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the load.

	V	24	48	110/ 127	220/ 230	380/ 400	440	V	24	48	110	220	440
1 million operating cycles	VA	48	96	240	440	800	880	W	120	80	60	52	51
3 million operating cycles	VA	17	34	86	158	288	317	W	55	38	30	28	26
10 million operating cycles	VA	7	14	36	66	120	132	W	15	11	9	8	7
Occasional making capacity	VA	1000	2050	5000	10000	14000	13000	W	720	600	400	300	230

Characteristics (continued)

TeSys contactors

Mini-contactors TeSys LC1 SKGC,
for use in modular panels

Control circuit characteristics

Mini-contactor type		LC1 SKGC2	LC1 SKGC3 and LC1 SKGC4
Rated control circuit voltage (Uc)	V	~ 24...400	
Control voltage limits (0 ≤ 55 °C)			
Operation		0.85...1.1 Uc	
For drop-out		≥ 0.20 Uc	
Average coil consumption at 20 °C and at Uc			
Inrush	VA	16	23
Sealed	VA	4.2	4.9
Heat dissipation	W	1.4	1.5
Operating time at 20 °C and at Uc			
Between coil energisation and	opening of the N/C contacts	ms	8...16
	closing of the N/O contacts	ms	7...14
Between coil de-energisation and	opening of the N/O contacts	ms	6...8
	closing of the N/C contacts	ms	8...10
Maximum operating rate	In operating cycles per hour		1200
Mechanical durability at Uc in millions of operating cycles	50/60 Hz coil		10


Contactor selection according to required electrical durability

TeSys contactors

Mini-contactors TeSys LC1 SKGC,
for use in modular panels

Use in category AC-3 ($U_e \leq 440$ V)


Control of 3-phase asynchronous squirrel cage motors with breaking whilst running.
The current broken (I_c) in category AC-3 is equal to the rated operational current of the motor.

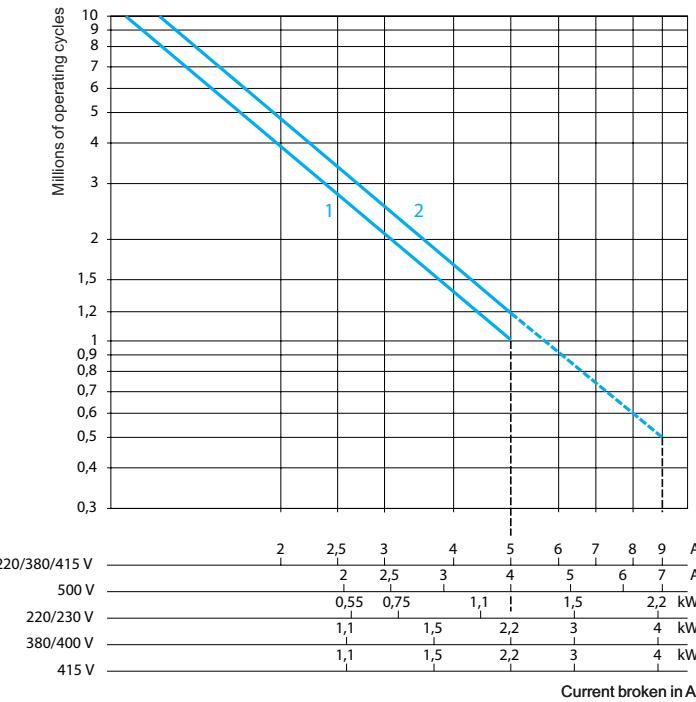

- 1 LC1 SKGC2
2 LC1 SKGC3 and SKGC4
--- only up to 415 V

Use in category AC-1 ($U_e \leq 440$ V)

Control of resistive circuits ($\cos \varphi \geq 0.95$).
The current broken (I_c) in category AC-1 is equal to the current (I_e) normally drawn by the load.

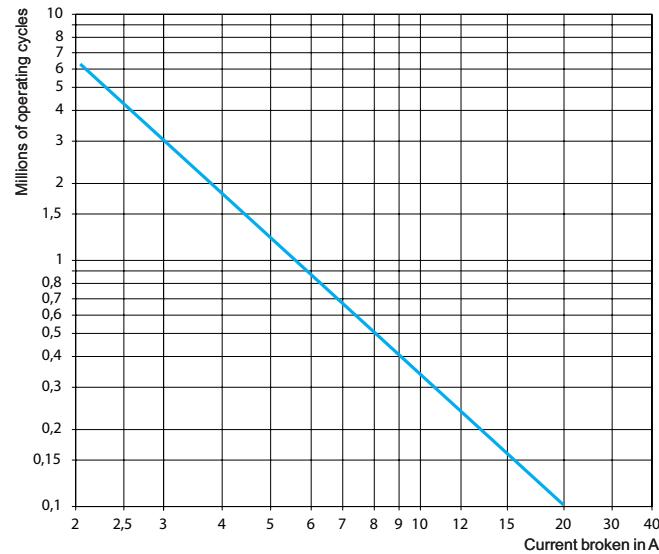

5

References :
pages 5/42 and 5/43

Dimensions :
page 5/44

Schemes :
page 5/45

Schneider
Electric

5/41

References

TeSys contactors

Mini-contactors TeSys LC1 SKGC,
for use in modular panels

- Mounting on 35 mm rail or fixing by four Ø 4 screws, except for LC1 SKGC200.
- Connection by connectors.
- Mini-contactor fitted with transparent, sealable protective cover to prevent front face access.



LC1 SKGC200



LC1 SKGC400

Mini-contactors, width 27 mm						Basic reference, to be completed by adding the voltage code (1)	Weight kg
Standard power ratings of 3-phase motors 50/60 Hz in category AC-3			Rated operational current in AC-3 up to 400 V	Non inductive loads category AC-1 maximum current θ ≤ 50 °C	No. of poles		
kW	kW	kW	A	A			
—	—	—	5	20	2	—	—
							LC1 SKGC200●● 0.132

Mini-contactors, width 45 mm						Basic reference, to be completed by adding the voltage code (1)	Weight kg
Standard power ratings of 3-phase motors 50/60 Hz in category AC-3			Rated operational current in AC-3 up to 400 V	Non inductive loads category AC-1 maximum current θ ≤ 50 °C	No. of poles		
kW	kW	kW	A	A			
1.1	4	4	9	20	3	1	—
					3	—	1
					4	—	—
							LC1 SKGC310●● 0.175
							LC1 SKGC301●● 0.175
							LC1 SKGC400●● 0.175

(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office)

Volts ~ 50/60 Hz	24	48	110	120	220	230	240	380	400
Code	B7	E7	F7	G7	M7	P7	U7	Q7	V7

Characteristics :
pages 5/38 to 5/41

Dimensions :
page 5/44

Schemes :
page 5/45

5/42

Schneider
Electric

References

TeSys contactors

Mini-contactors TeSys LC1 SKGC,
for use in modular panels
Suppressor modules



LA4 SK•1•

511134

Suppressor modules					
Connection without need for tools by clipping onto right-hand side of contactor					
For use on contactors	Type	For voltages	Sold in lots of	Unit reference	Weight kg
LC1 SKGC	Varistor (1)	~ and --- 24...48 V	10	LA4 SKE1E	0.003
		~ and --- 110...250 V	10	LA4 SKE1U	0.003
	Diode (2)	--- 24...250 V	10	LA4 SKC1U	0.003

(1) Protection provided by limiting the transient voltage to $2 U_{C\max}$.

Maximum reduction of transient voltage peaks.

Slight increase in drop-out time (1.1 to 1.5 times the normal time).

(2) No overvoltage or oscillating frequency.


Slight increase in drop-out time (1.1 to 1.5 times the normal time).

Dimensions, mounting

TeSys contactors


Mini-contactors TeSys LC1 SKGC,
for use in modular panels

Dimensions Mini-contactors LC1 SKGC2

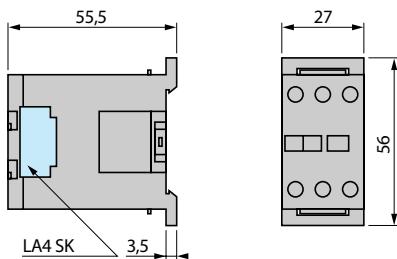


Mounting

On mounting rail AM1 DP200 or AM1 DE200 (\rightarrow 35 mm)

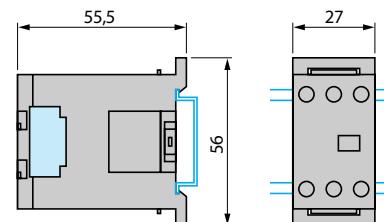




Dimensions Mini-contactors LC1 SKGC3 and SKGC4

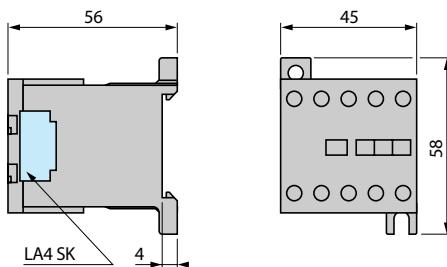

Mounting

On panel

On mounting rail AM1 DP200 or AM1 DE200 (\rightarrow 35 mm)




Schemes

TeSys contactors

Mini-contactors TeSys LC1 SKGC,
for use in modular panels

2-pole mini-contactors



LC1 SKGC2



3-pole mini-contactors


LC1 SKGC310

LC1 SKGC301



4-pole mini-contactors

LC1 SKGC400



5

Characteristics :
pages 5/38 to 5/41

References :
pages 5/42 and 5/43

Dimensions :
page 5/44

Schneider
Electric

5/45

Selection guide

TeSys contactors

TeSys D contactors

Applications	All types of control system						
Rated operational current le max AC-3 (Ue ≤ 440 V) le AC-1 (θ ≤ 60 °C)	9 A 20/25 A	12 A 25/32 A	18 A 25/40 A	25 A 32 A	32 A 50 A	38 A	
Rated operational voltage	690 V on ~ and ==						
Number of poles	3 or 4	3 or 4	3 or 4	3 or 4	3		
Rated operational power in AC-3	220/240 V 380/400 V 415/440 V 500 V 660/690 V 1000 V	2.2 kW 4 kW 4 kW 5.5 kW 5.5 kW —	3 kW 5.5 kW 5.5 kW 7.5 kW 7.5 kW —	4 kW 7.5 kW 9 kW 10 kW 10 kW —	5.5 kW 11 kW 11 kW 15 kW 15 kW —	7.5 kW 15 kW 15 kW 18.5 kW 18.5 kW —	9 kW 18.5 kW 18.5 kW 18.5 kW 18.5 kW —
Auxiliary contacts	1 N/C and 1 N/O instantaneous incorporated in the contactors, with add-on blocks common to the whole range comprising up to 4 N/C or N/O instantaneous, up to 1 N/O + 1 N/C time delay and up to 2 N/O or 2 N/C protected contacts and 2 screen continuity terminals.						
Thermal overload relays manual-auto compatible	Class 10 A Class 20	0.10...10 A 2.5...10 A	0.10...13 A 2.5...13 A	0.10...18 A 2.5...18 A	0.10...32 A 2.5...32 A	0.10...38 A 0.10...38 A	
Suppressor modules (== and low consumption contactors are fitted with a built-in bidirectional peak limiting diode suppressor as standard)	Varistor Diode RC circuit Bidirectional peak limiting diode	● — ● ●	● — ● ●	● — ● ●	● — ● ●	● — ● ●	
Interfaces	Relay output Relay interface with manual override switch Solid state	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	
Contactor type references	~ or == 3 pole ~ 4 pole == 4 pole	LC1 D09 LC1 DT20/ LC1 D098	LC1 D12 LC1 DT25/ LC1 D128	LC1 D18 LC1 DT32/ LC1 D188	LC1 D25 LC1 DT40/ LC1 D258	LC1 D32 — —	LC1 D38 — —
Reversing contactor type references	~ 3 pole == 3 pole ~ 4 pole == 4 pole	LC2 D09 LC2 D09 LC2 DT20 LC2 DT20	LC2 D12 LC2 D12 LC2 DT25 LC2 DT25	LC2 D18 LC2 D18 LC2 DT32 LC2 DT32	LC2 D25 LC2 D25 LC2 DT40 LC2 DT40	LC2 D32 LC2 D32 — —	LC2 D38 LC2 D38 — —
Pages	Contactors Reversing contactors	5/62 to 5/67 5/72 to 5/75					



40 A	50 A	65 A	80 A	95 A	115 A	150 A
60 A	80 A		125 A		200 A	

690 V ~ or \equiv	1000 V on \sim supply, 690 V on \equiv supply
---------------------	---

3	4	3	3	4	3	4	3	4	3
---	---	---	---	---	---	---	---	---	---

11 kW	15 kW	18.5 kW	22 kW	25 kW	30 kW	40 kW
18.5 kW	22 kW	30 kW	37 kW	45 kW	55 kW	75 kW
22 kW	25/30 kW	37 kW	45 kW	45 kW	59 kW	80 kW
22 kW	30 kW	37 kW	55 kW	55 kW	75 kW	90 kW
30 kW	33 kW	37 kW	45 kW	45 kW	80 kW	100 kW
—	—	—	45 kW	45 kW	75 kW	90 kW

1 N/C and 1 N/O instantaneous incorporated in the contactors, with add-on blocks common to the whole range comprising up to 4 N/C or N/O instantaneous, up to 1 N/O + 1 N/C time delay and up to 2 N/O or 2 N/C protected contacts and 2 screen continuity terminals.

5

13...40 A	13...50 A	13...65 A	17...104 A	17...104 A	60...150 A	60...150 A
13...40 A	13...50 A	13...65 A	17...80 A		60...150 A	60...150 A

•	•	•	•	•	•	•	•	•	—
•	•	•	•	•	•	•	—	—	—
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	—	—	—
—	—	—	—	—	—	—	—	—	—

•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•

LC1 D40A	LC1 D50A	LC1 D65A	LC1 D80	LC1 D95	LC1 D115	LC1 D150
LC1 DT60A	—	LC1 DT80A	LC1 D80	—	LC1 D115	—
LC1 DT60A	—	LC1 DT80A	LC1 D80	—	LC1 D115	—

LC2 D40A	LC2 D50A	LC2 D65A	LC2 D80	LC2 D95	LC2 D115	LC2 D150
LC2 D40A	LC2 D50A	LC2 D65A	—	—	—	—
—	—	—	LC2 D80	—	LC2 D115	—
—	—	—	—	—	—	—

5/62 to 5/67	5/72 to 5/75
--------------	--------------

Selection guide

TeSys contactors TeSys D low consumption contactors

Applications		Automation systems		
				
Rated operational current	le max AC-3 (Ue ≤ 440 V)	9 A	12 A	18 A
	le AC-1 ($\theta \leq 60^\circ C$)	20/25 A	20/25 A	25/32 A
Rated operational voltage		690 V		
Number of poles		3 or 4	3 or 4	3 or 4
Rated operational power in AC-3	220/240 V	2.2 kW	3 kW	4 kW
	380/400 V	4 kW	5.5 kW	7.5 kW
	415/440 V	4 kW	5.5 kW	9 kW
	500 V	5.5 kW	7.5 kW	10 kW
	660/690 V	5.5 kW	7.5 kW	10 kW
Coil consumption		2.4 W (100 mA - 24 V)		
Operating ranges		0.7...1.25 Uc		
Operating time at 20 °C and at Uc	Closing	70 ms		
	Opening	25 ms		
Auxiliary contact block modules		1 N/C and 1 N/O instantaneous contacts incorporated in the contactors, with add-on blocks common to the whole range, comprising up to 2 N/C or 2 N/O instantaneous standard contacts		
Interference suppression		Built-in suppression as standard, by bi-directional peak limiting diode		
Contactor type	3-pole	LC1 D09	LC1 D12	LC1 D18
	4-pole	LC1 DT20/D098	LC1 DT25/D128	LC1 DT32/D188
Reversing contactor type	3-pole	LC2 D09	LC2 D12	LC2 D18
	4-pole	LC2 DT20	LC2 DT25	LC2 DT32
Pages	Contactors	5/62 to 5/67		
	Reversing contactors	5/72 to 5/75		

(1) With low consumption kit **LA4 DBL** (see page 5/83).

(2) With 2 low consumption kits **LA4 DBL** (see page 5/83).



25 A	32 A	38 A	40 A	50 A	65 A
25/40 A	50 A	50 A	60 A	—	80 A

690 V	690 V
-------	-------

3 or 4	3	3	3	3	3
5.5 kW	7.5 kW	9 kW	11 kW	15 kW	18.5 kW
11 kW	15 kW	18.5 kW	18.5 kW	22 kW	30 kW
11 kW	15 kW	18.5 kW	22 kW	25/30 kW	37 kW
15 kW	18.5 kW	18.5 kW	22 kW	30 kW	37 kW
15 kW	18.5 kW	18.5 kW	30 kW	33 kW	37 kW

2.4 W (100 mA - 24 V)	0.6 W (25 mA - 24 V) for relay LA4 DFB + the power consumed by the contactor coil
0.7...1.25 Uc	—

70 ms	—	—	—
25 ms	—	—	—

1 N/C and 1 N/O instantaneous contacts incorporated in the contactors, with add-on blocks common to the whole range, comprising up to 2 N/C or 2 N/O instantaneous standard contacts



Built-in suppression as standard, by bi-directional peak limiting diode

LC1 D25	LC1 D32	LC1 D38	LC1 D40A (1)	LC1 D50A (1)	LC1 D65A (1)
LC1 DT40/D258			—	—	—
LC2 D25	LC2 D32	LC2 D38	LC2 D40A (2)	LC2 D50A (2)	LC2 D65A (2)
LC2 DT40					

5/62 to 5/67
5/72 to 5/75

Characteristics

TeSys contactors TeSys D contactors

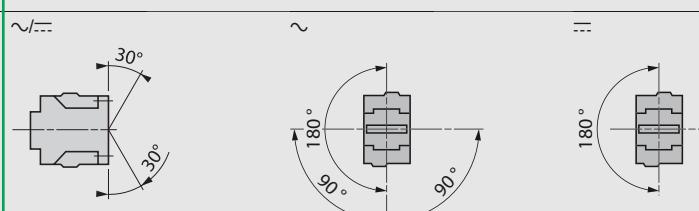Contactor type	LC1	D09...D18 DT20 and DT25	D25...D38 DT32 and DT40	D40A...D65A DT60A and DT80A	D80...D95	D115 and D150
Environment						
Rated insulation voltage (Ui)	Conforming to IEC 60947-4-1, overvoltage category III, degree of pollution: 3 Conforming to UL, CSA	V V	690 600			1000
Rated impulse withstand voltage (Uimp)	Conforming to IEC 60947	kV	6		8	
Conforming to standards			IEC/EN 60947-4-1, IEC/EN 60947-5-1, UL 508, CSA C22.2 n°14.			
Product certifications			UL, CSA (1), CCC, GOST GL, DNV, RINA, BV, LROS (pending for contactors LC1 D40A to D65A)			
Degree of protection (2) (front face only)	Conforming to VDE 0106 and IEC 60529			Protection against direct finger contact IP 2X		
	Power circuit connections					
	Coil connection			Protection against direct finger contact IP 2X		
Protective treatment	Conforming to IEC 60068-2-30		"TH"			
Ambient air temperature around the device	Storage Operation Permissible	°C °C °C	- 60...+ 80 - 5...+ 60 - 40...+ 70, for operation at Uc			
Maximum operating altitude	Without derating	m	3000			
Operating positions (3)	Without derating in the following positions Positions that are not permissible		 	For = contactors LC1 D09 to LC1 D65A.		
Flame resistance	Conforming to UL 94 Conforming to IEC 60695-2-1		V1 850			
Shock resistance (4) 1/2 sine wave = 11 ms	Contactor open Contactor closed		10 gn 15 gn	8 gn 15 gn	10 gn 15 gn	6 gn 15 gn
Vibration resistance (4) 5...300 Hz	Contactor open Contactor closed		2 gn 4 gn	4 gn 4 gn	3 gn 4 gn	4 gn

(1) Contactor LC1 D95 with d.c. coil is not UL/CSA certified.

(2) Protection provided for the cabling c.s.a.'s indicated on the next page and for connection by cable.

(3) When mounting on a vertical rail, use a stop.

(4) Without modifying the contact states, in the most unfavourable direction (coil energised at Ue).

Characteristics (continued)

TeSys contactors

TeSys D contactors

Contactor type	LC1	D09 and D12 DT20 and DT25	D18 (3P)	D25 (3P)	D32	D38	D18 and D25 (4P) DT32 and DT40	D40A to D65A DT60A and DT80A (1)	D80 and D95	D115 and D150
Power circuit connections										
Screw clamp terminal connections										
Tightening										
Flexible cable without cable end	1 conductor	mm ²	1...4	1.5...6	2.5...10		2.5...10	1...35	4...50	10...120
	2 conductors	mm ²	1...4	1.5...6	2.5...10		2.5...10	1...25 and 1...35	4...25	10...120 + 10...50
Flexible cable with cable end	1 conductor	mm ²	1...4	1...6	1...10		2.5...10	1...35	4...50	10...120
	2 conductors	mm ²	1...2.5	1...4	1.5...6		2.5...10	1...25 and 1...35	4...16	10...120 + 10...50
Solid cable without cable end	1 conductor	mm ²	1...4	1.5...6	1.5...10		2.5...16	1...35	4...50	10...120
	2 conductors	mm ²	1...4	1.5...6	2.5...10		2.5...16	1...25 and 1...35	4...25	10...120 + 10...50
Screwdriver	Philips		N° 2	N° 2	N° 2		N° 2	—	—	—
	Flat screwdriver Ø		Ø 6	Ø 6	Ø 6		Ø 6	—	Ø 6...Ø 8	—
Hexagonal key		—	—	—	—		—	4	4	4
Tightening torque		N.m	1.7	1.7	2.5		1.8	5: ≤ 25 mm ² 8: 35 mm ²	9	12
Spring terminal connections (2)										
Flexible cable without cable end	1 conductor	mm ²	2.5 (4: DT25)	4	4	4	—	10	—	—
	2 conductors	mm ²	2.5 (except DT25)	4	4	4	—	—	—	—
Connection by bars or lugs										
Bar c.s.a.			—	—	—	—	—	—	3 x 16	5 x 25
Lug external Ø		mm	8	8	10	10	8	16.5	17	25
Ø of screw		mm	M3.5	M3.5	M4	M4	M3.5	M6	M6	M8
Screwdriver	Philips		N° 2	N° 2	N° 2	N° 2	N° 2	—	—	—
	Flat screwdriver Ø		Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	—	Ø 8	—
Key for hexagonal headed screw		—	—	—	—	—	—	10	10	13
Tightening torque		N.m	1.7	1.7	2.5	2.5	1.8	6	9	12
Control circuit connections										
Connection by cable (tightening via screw clamps)										
Flexible cable without cable end	1 conductor	mm ²	1...4	1...4	1...4	1...4	1...4	1...4	1...4	1...2.5
	2 conductors	mm ²	1...4	1...4	1...4	1...4	1...4	1...4	1...4	1...2.5
Flexible cable with cable end	1 conductor	mm ²	1...4	1...4	1...4	1...4	1...4	1...4	1...2.5	1...2.5
	2 conductors	mm ²	1...2.5	1...2.5	1...2.5	1...2.5	1...2.5	1...2.5	1...2.5	1...2.5
Solid cable without cable end	1 conductor	mm ²	1...4	1...4	1...4	1...4	1...4	1...4	1...4	1...2.5
	2 conductors	mm ²	1...4	1...4	1...4	1...4	1...4	1...4	1...4	1...2.5
Screwdriver	Philips		N° 2	N° 2	N° 2	N° 2	N° 2	N° 2	N° 2	N° 2
	Flat screwdriver Ø		Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6
Tightening torque		N.m	1.7	1.7	1.7	1.7	1.7	1.7	1.2	1.2
Spring terminal connections (2)										
Flexible cable without cable end	1 conductor	mm ²	2.5	2.5	2.5	2.5	—	2.5	0.75...2.5	—
	2 conductors	mm ²	2.5	2.5	2.5	2.5	—	2.5	0.75...2.5	—
Connection by bars or lugs										
Lug external Ø		mm	8	8	8	8	8	8	8	8
Ø of screw		mm	M3.5	M3.5	M3.5	M3.5	M3.5	M3.5	M3.5	M3.5
Screwdriver	Philips		N° 2	N° 2	N° 2	N° 2	N° 2	N° 2	N° 2	N° 2
	Flat screwdriver Ø		Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6
Tightening torque		N.m	1.7	1.7	1.7	1.7	1.7	1.7	1.2	1.2

(1) BTR screws: hexagon socket head. In accordance with local electrical wiring regulations, a size 4 insulated Allen key must be used (reference LAD ALLEN4, see page 5/85).

(2) If cable ends are used, choose the next size down (example: for 2.5 mm², use 1.5 mm²) and square crimp the cable ends using a special tool.

Characteristics (continued)

TeSys contactors TeSys D contactors

Contactor type	LC1		D09 (3P)	DT20 D098	D12 (3P)	DT25 D128	D18 (3P)	DT32 D188	D25 (3P)	DT40 D258
Pole characteristics										
Rated operational current (Ie) (Ue ≤ 440 V)	In AC-3, θ ≤ 60 °C In AC-1, θ ≤ 60 °C	A	9		12		18		25	
Rated operational voltage (Ue)	Up to	V	25 (1)	20	25 (1)	25	32 (1)	32	40 (1)	40
Frequency limits	Of the operational current	Hz	25...400		25...400		25...400		25...400	
Conventional thermal current (Ith)	θ ≤ 60 °C	A	25 (1)	20	25 (1)	25	32 (1)	32	40 (1)	40
Rated making capacity (440 V)	Conforming to IEC 60947	A	250		250		300		450	
Rated breaking capacity (440 V)	Conforming to IEC 60947	A	250		250		300		450	
Permissible short time rating	For 1 s	A	210		210		240		380	
No current flowing for preceding 15 minutes with θ ≤ 40 °C	For 10 s	A	105		105		145		240	
	For 1 min	A	61		61		84		120	
	For 10 min	A	30		30		40		50	
Fuse protection against short-circuits (U ≤ 690 V)	Without thermal overload relay, gG fuse	A	25		40		50		63	
	With thermal overload relay	A	See pages 6/20 to 6/22, for aM or gG fuse ratings corresponding to the associated thermal overload relay							
Average impedance per pole	At Ith and 50 Hz	mΩ	2.5		2.5		2.5		2	
Power dissipation per pole for the above operational currents	AC-3	W	0.20		0.36		0.8		1.25	
	AC-1	W	1.56		1.56		2.5		3.2	
Control circuit characteristics, a.c. supply										
Rated control circuit voltage (Uc)	50/60 Hz	V	12...690							
Control voltage limits										
50 or 60 Hz coils	Operation		–							
	Drop-out		–							
50/60 Hz coils	Operation		0.8...1.1 Uc on 50 Hz and 0.85...1.1 Uc on 60 Hz at 60 °C							
	Drop-out		0.3...0.6 Uc at 60 °C							
Average consumption at 20 °C and at Uc	~ 50 Hz Inrush	50 Hz coil	VA	–						
	Cos φ		VA	0.75						
	50/60 Hz coil		VA	70						
	Sealed	50 Hz coil	VA	–						
	Cos φ		VA	0.3						
	50/60 Hz coil		VA	7						
~ 60 Hz	Inrush	60 Hz coil	VA	–						
	Cos φ		VA	0.75						
	50/60 Hz coil		VA	70						
	Sealed	60 Hz coil	VA	–						
	Cos φ		VA	0.3						
	50/60 Hz coil		VA	7.5						
Heat dissipation	50/60 Hz		W	2...3						
Operating time (2)	Closing "C"	ms	12...22							
	Opening "O"	ms	4...19							
Mechanical durability in millions of operating cycles	50 or 60 Hz coil		–							
	50/60 Hz coil on 50 Hz			15						
Maximum operating rate at ambient temperature ≤ 60 °C	In operating cycles per hour			3600						

(1) Versions with spring terminal connections:

16 A for LC1 D093 and LC1 D123 (20 A possible with 2 x 2.5 mm² in parallel),
25 A for LC1 D183 to LC1 D323 (32 A possible for LC1 D183 connected with 2 x 4 mm² cables in parallel; 40 A possible for LC1 D253 and LC1 D323 connected with 2 x 4 mm² in parallel).

(2) The closing time "C" is measured from the moment the coil supply is switched on to closure of the main poles. The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.

D32	D38	D40A	DT60A	D50A	D65A	DT80A	D80	D95	D115	D150
<hr/>										
32	38	40	—	50	65	—	80	95	115	150
50 (1)	50	60	60	80	80	80	125	125	200	200
690	690	690	690	690	690	690	1000	1000	1000	1000
25...400	25...400	25...400	25...400	25...400	25...400	25...400	25...400	25...400	25...400	25...400
50	50	60	60	80	80	80	125	125	200	200
550	550	800	800	900	1000	1000	1100	1100	1260	1660
550	550	800	800	900	1000	1000	1100	1100	1100	1400
430	430	720	720	810	900	900	990	1100	1100	1400
260	310	320	320	400	520	520	640	800	950	1200
138	150	165	165	208	260	260	320	400	550	580
60	60	72	72	84	110	110	135	135	250	250
63	63	80	80	100	125	125	200	200	250	315
63	63	80	80	100	125	125	160	160	200	250
See pages 6/20 to 6/22 for aM or gG fuse ratings corresponding to the associated thermal overload relay										
2	2	1.5	1.6	1.5	1.5	1.6	0.8	0.8	0.6	0.6
2	3	2.4	—	3.7	6.3	—	5.1	7.2	7.9	13.5
5	5	5.4	5.8	9.6	9.6	10.2	12.5	12.5	24	24
<hr/>										
12...690	12...690							24...500		
—	—							0.85...1.1 Uc at 55 °C		
—	—							0.3...0.6 Uc at 55 °C		
0.8...1.1 Uc on 50 Hz and 0.85...1.1 Uc on 60 Hz at 60 °C	0.8...1.1 Uc on 50 Hz and 0.85...1.1 Uc on 60 Hz at 60 °C							0.3...0.5 Uc at 55 °C		
0.3...0.6 Uc at 60 °C	0.3...0.6 Uc at 60 °C							0.3...0.6 Uc at 55 °C		
—	—							200	300	—
0.75	0.75							0.75	0.8	0.9
70	160							245	280...350	280...350
—	—							20	22	—
0.3	0.3							0.3	0.3	0.9
7	15							26	2...18	2...18
—	—							220	300	—
0.75	0.75							0.75	0.8	0.9
70	140							245	280...350	280...350
—	—							22	22	—
0.3	0.3							0.3	0.3	0.9
7.5	13							26	2...18	2...18
2...3	4...5							6...10	3...8	3...4.5
12...22	12...26	12...26	12...26	12...26	12...26	12...26	20...35	20...35	20...50	20...35
4...19	4...19	4...19	4...19	4...19	4...19	4...19	6...20	6...20	6...20	40...75
—	—	—	—	—	—	—	10	10	8	—
15	6	6	6	6	6	6	4	4	8	8
3600	3600	3600	3600	3600	3600	3600	3600	3600	2400	1200

Characteristics (continued)

TeSys contactors
TeSys D contactors

Contactor type			LC1 D09...D38 LC1 DT20...DT40	LC1 D40A...D65A LC1 DT60A and DT80A	LC1 or LP1 D80 LC1 D95	LC1 D115 and LC1 D150
d.c. control circuit characteristics						
Rated control circuit voltage (Uc)	---		V	12...440	12...440	24...440
Rated insulation voltage	Conforming to IEC 60947-1 Conforming to UL, CSA		V	690 600		
Control voltage limits	Operation	Standard coil		0.7...1.25 Uc at 60 °C	0.75...1.25 Uc at 60 °C	0.85...1.1 Uc at 55 °C
	Drop-out	Wide range coil		—	—	0.75...1.2 Uc at 55 °C
				0.1...0.25 Uc at 60 °C	0.1...0.3 Uc at 60 °C	0.1...0.3 Uc at 55 °C
Average consumption at 20 °C and at Uc	---	Inrush Sealed	W	5.4 5.4	19 7.4	22 22
Operating time (1) average at Uc	Closing Opening	"C" "O"	ms	63 ± 15 % 20 ± 20 %	50 ± 15% 20 ± 20%	95...130 20...35
<i>Note: The arcing time depends on the circuit switched by the poles. For all normal 3-phase applications, the arcing time is less than 10 ms. The load is isolated from the supply after a time equal to the sum of the opening time and the arcing time.</i>						
Time constant (L/R)			ms	28	34	75
Mechanical durability at Uc	In millions of operating cycles			30	10	10
Maximum operating rate at ambient temperature ≤ 60 °C	In operating cycles per hour			3600	3600	3600
Low consumption control circuit characteristics						
Rated insulation voltage	Conforming to IEC 60947-1 Conforming to UL, CSA		V	690 600	—	
Maximum voltage	Of the control circuit on ---		V	250	—	
Average consumption d.c. at 20 °C and at Uc	Wide range coil (0.7...1.25 Uc)	Inrush Sealed	W	2.4 2.4	—	
Operating time (1) at Uc and at 20 °C	Closing Opening	"C" "O"	ms	77 ± 15 % 25 ± 20 %	—	
Voltage limits ($\theta \leq 60^{\circ}\text{C}$) of the control circuit	Operation Drop-out			0.8 to 1.25 Uc 0.1...0.3 Uc	—	
Time constant (L/R)			ms	40	—	
Mechanical durability	In millions of operating cycles			30	—	
Maximum operating rate at ambient temperature ≤ 60 °C	In operating cycles per hour			3600	—	

(1) The operating times depend on the type of contactor electromagnet and its control mode.

The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles.

The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate

Characteristics (continued)

TeSys contactors TeSys D contactors

Characteristics of auxiliary contacts incorporated in the contactor				
Mechanically linked contacts	Conforming to IEC 60947-5-1		Each contactor has 2 N/O and N/C contacts mechanically linked on the same movable contact holder	
Mirror contact	Conforming to IEC 60947-4-1		The N/C contact on each contactor represents the state of the power contacts and can be connected to a PREVENTA safety module	
Rated operational voltage (Ue)	Up to	V	690	
Rated insulation voltage (Ui)	Conforming to IEC 60947-1 Conforming to UL, CSA	V	690	
Conventional thermal current (Ith)	For ambient temperature $\leq 60^{\circ}\text{C}$	A	10	
Frequency of the operational current		Hz	25...400	
Minimum switching capacity $\lambda = 10^{-8}$	U min I min	V mA	17 5	
Short-circuit protection	Conforming to IEC 60947-5-1		gG fuse: 10 A	
Rated making capacity	Conforming to IEC 60947-5-1, I rms	A	~ 140 , $\equiv 250$	
Short-time rating	Permissible for	1 s 500 ms 100 ms	A A A	100 120 140
Insulation resistance		MΩ	> 10	
Non-overlap time	Guaranteed between N/C and N/O contacts	ms	1.5 (on energisation and on de-energisation)	

Operational power of contacts conforming to IEC 60947-5-1


1 million operating cycles
3 million operating cycles
10 million operating cycles

a.c. supply, categories AC-14 and AC-15
Electrical durability (valid for up to 3600 operating cycles/hour) on an inductive load such as the coil of an electromagnet: making current ($\cos \phi 0.7$) = 10 times the power broken ($\cos \phi 0.4$).

d.c. supply, category DC-13
Electrical durability (valid for up to 1200 operating cycles/hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the load.


V	24	48	115	230	400	440	600
VA	60	120	280	560	960	1050	1440
VA	16	32	80	160	280	300	420
VA	4	8	20	40	70	80	100

AC-15

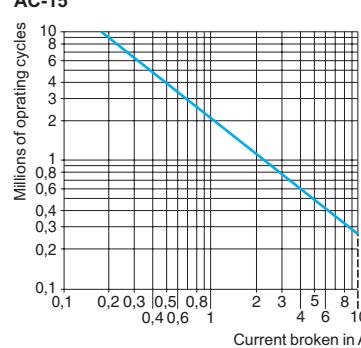

V	24	48	125	250	440
W	96	76	76	76	44
W	48	38	38	32	—
W	14	12	12	—	—

DC-13

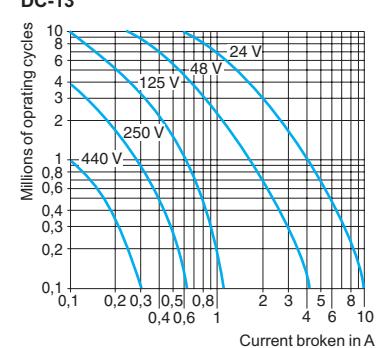

Characteristics

TeSys contactors

Auxiliary contact blocks without dust and damp protected contacts for TeSys D contactors

Contact block type		LAD N or LAD C	LAD T and LAD S	LAD R	LAD 8
Environment					
Conforming to standards			IEC 60947-5-1, NF C 63-140, VDE 0660, BS 4794, EN 60947-5-1		
Product certifications			UL, CSA		
Protective treatment	Conforming to IEC 60068		"TH"		
Degree of protection	Conforming to VDE 0106		Protection against direct finger contact IP 2X		
Ambient air temperature around the device	Storage	°C	- 60...+ 80		
	Operation	°C	- 5...+ 60		
	Permissible for operation at Uc	°C	- 40...+ 70		
Maximum operating altitude	Without derating	m	3000		
Connection by cable	Phillips N° 2 and Ø 6 mm Flexible or solid cable with or without cable end	mm²	Min: 1 x 1; max: 2 x 2.5		
Spring terminal connections	Flexible or solid cable without cable end	mm²	Max: 2 x 2.5		
Instantaneous and time delay contact characteristics					
Number of contacts		1, 2 or 4	2	2	2
Rated operational voltage (Ue)	Up to	V	690		
Rated insulation voltage (Ui)	Conforming to IEC 60947-5-1 Conforming to UL, CSA	V	690		
Conventional thermal current (Ith)	For ambient temperature ≤ 60 °C	A	10		
Frequency of the operational current		Hz	25...400		
Minimum switching capacity	U min	V	17		
	I min	mA	5		
Short-circuit protection	Conforming to IEC 60947-5-1 and VDE 0660. gG fuse	A	10		
Rated making capacity	Conforming to IEC 60947-5-1	I rms	A	~: 140; ==: 250	
Short-time rating	Permissible for	1 s	A	100	
		500 ms	A	120	
		100 ms	A	140	
Insulation resistance		MΩ	> 10		
Non-overlap time	Guaranteed between N/C and N/O contacts	ms	1.5 (on energisation and on de-energisation)		
Overlap time	Guaranteed between N/C and N/O contacts on LAD C22	ms	1.5	-	-
Time delay (LADT, R and S contact blocks)	Ambient air temperature for operation	°C	-	- 40...+ 70	- 40...+ 70
Accuracy only valid for setting range indicated on the front face	Repeat accuracy		-	± 2 %	± 2 %
	Drift up to 0.5 million operating cycles		-	+ 15 %	+ 15 %
	Drift depending on ambient air temperature		-	0.25 % per °C	0.25 % per °C
Mechanical durability	In millions of operating cycles		30	5	5
Operational power of contacts			See page 5/58		30

References :
pages 5/79 and 5/80

Dimensions :
pages 5/92 and 5/93

Schemes :
pages 5/96 and 5/97

Characteristics (continued)

TeSys contactors

Auxiliary contact blocks with dust and damp protected contacts for TeSys D contactors

Contact block type		LA1 DX	LA1 DZ		LA1 DY
			Protected	Non protected	
Environment					
Conforming to standards			IEC60947-5-1, VDE0660		
Product certifications			UL, CSA		
Protective treatment	Conforming to IEC 60068		"TH"		
Degree of protection	Conforming to VDE 0106		Protection against direct finger contact IP 2X		
Ambient air temperature	Storage and operation	°C	- 25...+ 70		
Cabling	Phillips N° 2 and Ø 6 mm Flexible or solid conductor with or without cable end	mm ²	Min: 1 x 1; max: 2 x 2.5		
Number of contacts		2	2	2	2
Contact characteristics					
Rated operational voltage (Ue)	Up to	V	50	50	690
Rated insulation voltage (Ui)	Conforming to IEC 60947-5-1 Conforming to UL, CSA	V	250	250	690
Conventional thermal current (Ith)	For ambient temperature ≤ 40 °C	A	–	–	10
Maximum operational current (Ie)		mA	500	500	–
Frequency of the operational current		Hz	–	–	25...400
Minimum switching capacity	U min	V	3	3	3
	I min	mA	0.3	0.3	0.3
Short-circuit protection	Conforming to IEC 609475-1 gG fuse	A	–	–	10
Rated making capacity	Conforming to IEC 609475-1	I rms	A	–	~:140; ::: 250
Short-time rating	Permissible for	1 s	A	–	100
		500 ms	A	–	120
		100 ms	A	–	140
Insulation resistance		MΩ	> 10	> 10	> 10
Mechanical durability	In millions of operating cycles		5	5	30
Materials and technology	used for dust and damp protected contacts		Silver - Single break	Silver - Single break	Gold - Single break with crossed bars

5

Characteristics (continued)

TeSys contactors


Auxiliary contact blocks with dust and damp protected contacts for TeSys D contactors

Rated operational power of contacts (conforming to IEC 60947-5-1)

a.c. supply, categories AC-14 and AC-15

Electrical durability (valid for up to 3600 operating cycles/hour) on an inductive load such as the coil of an electromagnet:
making current ($\cos \phi 0.7$) = 10 times the power broken ($\cos \phi 0.4$).

	V	24	48	115	230	400	440	600
1 million operating cycles	VA	60	120	280	560	960	1050	1440
3 million operating cycles	VA	16	32	80	160	280	300	420
10 million operating cycles	VA	4	8	20	40	70	80	100

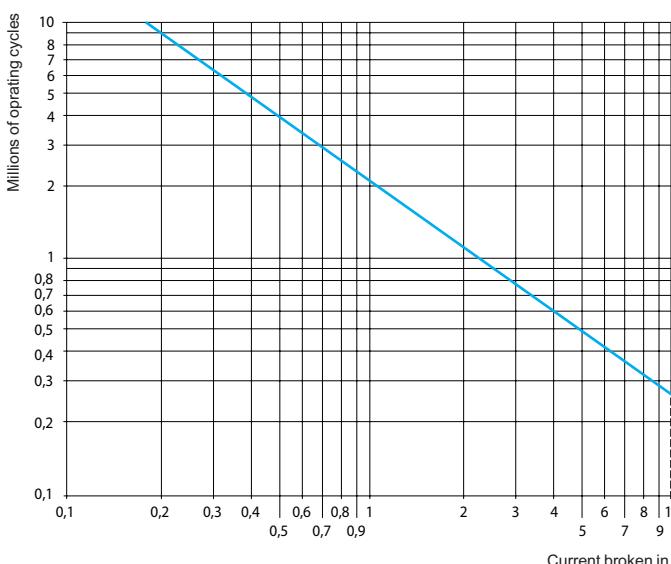


5

d.c. supply, category DC-13

Electrical durability (valid for up to 1200 operating cycles/hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the load.

	V	24	48	125	250	440
1 million operating cycles	W	120	90	75	68	61
3 million operating cycles	W	70	50	38	33	28
10 million operating cycles	W	25	18	14	12	10

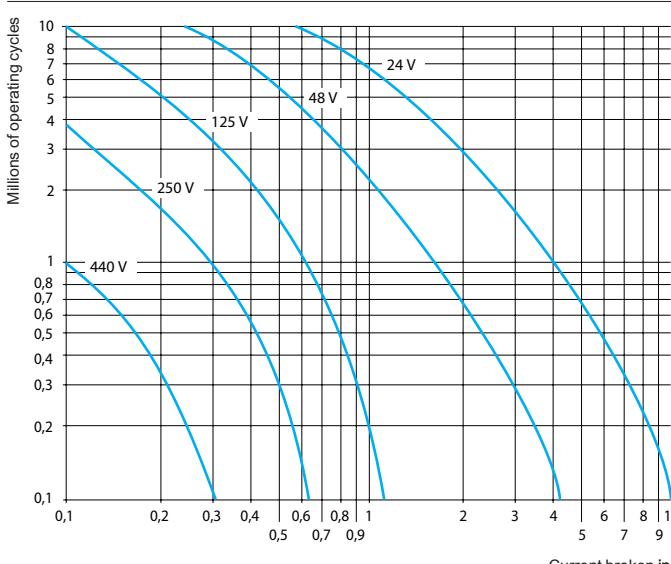

References :
pages 5/79 to 5/83

Dimensions :
pages 5/92 and 5/93

Schemes :
pages 5/96 and 5/97

5/58

Schneider
Electric

Characteristics

TeSys contactors

Control modules, coil suppressor modules and mechanical latch blocks for TeSys D contactors

Environment					
Conforming to standards		IEC 60947-5-1			
Product certifications		UL, CSA			
Protective treatment	Conforming to IEC 60068	"TH"			
Degree of protection	Conforming to VDE 0106	Protection against direct finger contact IP 2X			
Ambient air temperature around the device	Storage	°C	-40...+ 80		
	Operation	°C	-25...+ 55		
	Permissible for operation at Uc	°C	-25...+ 70		
Suppressor modules					
Module type		LA4 DA, LAD 4RC, LAD 4RC3		LA4 DB, LAD 4T, LAD 4T3	LA4 DC, LAD 4D3
Type of protection		RC circuit		Bidirectional peak limiting diode	Diode
Rated control circuit voltage (Uc)		V	~ 24...415	~ or ≡ 24...440	≡ 12...250
Maximum peak voltage			3 Uc	2 Uc	2 Uc
Natural RC frequency	24/48 V	Hz	400	—	—
	50/127 V	Hz	200	—	—
	110/240 V	Hz	100	—	—
	380/415 V	Hz	150	—	—
Mechanical latch blocks (1)					
Mechanical latch block type		LAD 6K10		LA6 DK20	
For use on contactor		LC1 D09...D65A DT20...DT80A		LC1 D80...D150 LP1 D80 and LC1 D115	
Product certifications		UL, CSA		UL, CSA	
Rated insulation voltage	Conforming to IEC 60947-5-1	V	690	690	
Rated control circuit voltage	~ 50/60 Hz and ≡	V	24...415	24...415	
Power required	For unlatching	~	VA	25	25
		≡	W	30	30
Maximum operating rate	In operating cycles/hour			1200	1200
On-load factor				10 %	10 %
Mechanical durability at Uc	In millions of operating cycles			0.5	0.5

(1) Unlatching can be manually operated or electrically controlled (pulsed).

The LA6 DK or LAD 6K latch coil and the LC1 D operating coil must not be energised simultaneously.

The duration of the LA6 DK or LAD 6K and LC1 D control signals must be ≥ 100 ms.

Characteristics

TeSys contactors

Electronic serial timer module
for TeSys D contactors

Module type		LA4 DT (On-delay)	
Environment			
Conforming to standards			IEC 60255-5
Product certifications			UL, CSA
Protective treatment	Conforming to IEC 60068		"TH"
Degree of protection	Conforming to VDE 0106		Protection against direct finger contact IP 2X
Ambient air temperature around the device	Storage	°C	-40...+80
	Operation	°C	-25...+55
	For operation at Uc	°C	-25...+70
Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V	250
Cabling	Phillips n° 2 and Ø 6 mm Flexible or solid conductor with or without cable end	mm ²	Min: 1 x 1; max: 2 x 2.5
Control circuit characteristics			
Built-in protection	Of the input		By varistor
	Contactor coil suppression		By varistor
Rated control circuit voltage (Uc)		V	~ or ---: 24...250
Permissible variation			0.8...1.1 Uc
Type of control			By mechanical contact only
Timing characteristics			
Timing ranges		s	0.1...2; 1.5...30; 25...500
Repeat accuracy	0...40 °C		± 3 % (10 ms minimum)
Reset time	During time delay period	ms	150
	After time delay period	ms	50
Immunity to microbreaks	During time delay period	ms	10
	After time delay period	ms	2
Minimum control pulse duration		ms	—
Time delay signalling	By LED		Illuminates during time delay period
Switching characteristics (solid state type)			
Maximum power dissipated		W	2
Leakage current		mA	< 5
Residual voltage		V	3.3
Oversupply protection			3 kV; 0.5 joule
Electrical durability	In millions of operating cycles		30
Function diagram			
Electronic on-delay timer LA4 DT			

References :
page 5/83

Dimensions :
pages 5/92 and 5/93

Schemes :
pages 5/96 and 5/97

5/60

Schneider
Electric

Characteristics

TeSys contactors

Interface modules for TeSys D contactors

Environment							
Conforming to standards		IEC 60255-5					
Product certifications		UL, CSA					
Protective treatment	Conforming to IEC 60068						
Degree of protection	Conforming to VDE 0106						
Ambient air temperature around the device	Storage	°C	– 40...+ 80				
	Operation	°C	– 25...+ 55				
	Permissible for operation at Uc	°C	– 25...+ 70				
Other characteristics							
Module type		LA4 DFB With relay		LA4 DWB Solid state			
Conventional thermal current (Ith)	For ambient temperature ≤ 50 °C	A	8				
Rated insulation voltage	Conforming to IEC 60947-5-1	V	250				
Rated operational voltage	Conforming to IEC 60947-5-1	V	250				
Indication of input state		By integral LED which illuminates when the contactor coil is energised					
Input signals	Control voltage (E1-E2)	V	— 24	— 24			
	Permissible variation	V	17...30	5...30			
	Current consumption at 20 °C	mA	25	8.5 for 5 V 15 for 24 V			
	State "0" guaranteed for	U	< 2.4	< 2.4			
		I mA	< 2	< 2			
Built-in protection	State "1" guaranteed for	U	17	5			
	Against reversed polarity		By diode	By diode			
	Of the input		By diode	By diode			
Electrical durability at 220 A/240 V	In millions of operating cycles		10	20			
Maximum immunity to microbreaks		ms	4	1			
Power dissipated	At 20 °C	W	0.6	0.4			
Direct mounting on contactor	With coil	~ 24...250 V	LC1 D80...D150	—			
		~ 100...250 V	—	LC1 D80...D115			
		~ 380...415 V	—	—			
Mounting with cabling adapter LAD 4BB	With coil	~ 24...250 V	LC1 D09...D38, LC1 DT20...DT40	LC1 D09...D38, LC1 DT20...DT40			
		~ 380...415 V	—	—			
Mounting with cabling adapter LAD 4BB3	With coil	~ 24...250 V	LC1 D40A...D65A	LC1 D40A...D65A			
		~ 380...415 V	LC1 D40A...D65A	LC1 D40A...D65A			
Total operating time at Uc (of the contactor)		The operating times depend on the type of contactor electromagnet and its control mode. The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles. The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.					
		With LA4 DFB					
		"C"	ms	LC1 D09...D38, LC1 DT20...DT40			
			20...30	28...34			
		"O"	ms	16...24			
			20...24	28...43			
				18...32			
Cabling	Phillips N° 2 and Ø 6 mm Flexible or solid cable with or without cable end	mm²	Min: 1 x 1; max: 2 x 2.5				

References

TeSys contactors

TeSys D contactors for motor control
up to 75 kW at 400 V, in category AC-3
For connection by screw clamp terminals and lugs

526216



LC1 D09**

526217



LC1 D25**

526218



LC1 D65**

526219



LC1 D95**

526220



LC1 D115**

Selection :
pages 5/194 to 5/225

3-pole contactors

Standard power ratings of 3-phase motors
50-60 Hz in category AC-3
($\theta \leq 60^\circ \text{C}$)

220 V 380 V 415 V 440 V 500 V 660 V 1000 V
230 V 400 V 690 V

Rated
oper-
ational
current
in AC-3
440 V
up to

| | | | |

Basic reference,
to be completed by adding
the control voltage code (2)

Weight
(3)

Fixing (1)

kW	A		kg						
----	----	----	----	----	----	----	---	--	----

Connection by screw clamp terminals

2.2	4	4	4	5.5	5.5	—	9	1	1	LC1 D09**	0.320
3	5.5	5.5	5.5	7.5	7.5	—	12	1	1	LC1 D12**	0.325
4	7.5	9	9	10	10	—	18	1	1	LC1 D18**	0.330
5.5	11	11	11	15	15	—	25	1	1	LC1 D25**	0.370
7.5	15	15	15	18.5	18.5	—	32	1	1	LC1 D32**	0.375
9	18.5	18.5	18.5	18.5	18.5	—	38	1	1	LC1 D38**	0.380

Power connections by EverLink® BTR screw connectors (4) and control by spring terminals

11	18.5	22	22	22	30	—	40	1	1	LC1 D40A** (5)	0.850
15	22	25	30	30	33	—	50	1	1	LC1 D50A** (5)	0.855
18.5	30	37	37	37	37	—	65	1	1	LC1 D65A** (5)	0.860

Connection by screw clamp terminals or connectors

22	37	45	45	55	45	45	80	1	1	LC1 D80**	1.590
25	45	45	45	55	45	45	95	1	1	LC1 D95**	1.610
30	55	59	59	75	80	65	115	1	1	LC1 D115**	2.500
40	75	80	80	90	100	75	150	1	1	LC1 D150**	2.500

Connection by lugs or bars

In the references selected above, insert a figure 6 before the voltage code.
Example: LC1 D09** becomes LC1 D096**.

Separate components

Auxiliary contact blocks and add-on modules: see pages 5/78 to 5/85

(1) LC1 D09 to D65A: clip-on mounting on 35 mm L rail AM1 DP or screw fixing.

LC1 D80 to D95 ~: clip-on mounting on 35 mm L rail AM1 DP or 75 mm L rail AM1 DL or screw fixing.

LC1 D80 to D95 -: clip-on mounting on 75 mm L rail AM1 DL or screw fixing.

LC1 D115 and D150: clip-on mounting on 2 x 35 mm L rails AM1 DP or screw fixing.

(2) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply

Volts	24	42	48	110	115	220	230	240	380	400	415	440	500
-------	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

LC1 D09...D150 (D115 and D150 coils with built-in suppression as standard, by bi-directional peak limiting diode).

50/60 Hz	B7	D7	E7	F7	FE7	M7	P7	U7	Q7	V7	N7	R7	S7
----------	----	----	----	----	-----	----	----	----	----	----	----	----	----

LC1 D80...D115

50 Hz	B5	D5	E5	F5	FE5	M5	P5	U5	Q5	V5	N5	R5	S5
-------	----	----	----	----	-----	----	----	----	----	----	----	----	----

60 Hz	B6	—	E6	F6	—	M6	—	U6	Q6	—	—	R6	—
-------	----	---	----	----	---	----	---	----	----	---	---	----	---

d.c. supply

Volts	12	24	36	48	60	72	110	125	220	250	440
-------	----	----	----	----	----	----	-----	-----	-----	-----	-----

LC1 D09...D65A (coils with integral suppression device fitted as standard)

U 0.75...1.25 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD
------------------	----	----	----	----	----	----	----	----	----	----	----

LC1 D80...D95

U 0.85...1.1 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD
-----------------	----	----	----	----	----	----	----	----	----	----	----

U 0.75...1.2 Uc	JW	BW	CW	EW	—	SW	FW	—	MW	—	—
-----------------	----	----	----	----	---	----	----	---	----	---	---

LC1 D115 and D150 (coils with integral suppression device fitted as standard)

U 0.75...1.2 Uc	—	BD	—	ED	ND	SD	FD	GD	MD	UD	RD
-----------------	---	----	---	----	----	----	----	----	----	----	----

Low consumption

Volts ...	5	12	20	24	48	110	220	250
-----------	---	----	----	----	----	-----	-----	-----

LC1 D09...D38 (coils with integral suppression device fitted as standard)

U 0.8...1.25 Uc	AL	JL	ZL	BL	EL	FL	ML	UL
-----------------	----	----	----	----	----	----	----	----

For other voltages between 5 and 690 V, see pages 5/86 to 5/91.

(3) The weights indicated are for contactors with a.c. control circuit. For d.c. or low consumption control circuit, add 0.160 kg from LC1 D09 to D38, 0.075 kg from LC1 D40A to D65A and 1 kg for LC1 D80 and D95.

(4) BTR screws: hexagon socket head. In accordance with local electrical wiring regulations, a size 4 insulated Allen key must be used (reference **LAD ALLEN4**, see page 5/85).

(5) For low consumption kit **LA4 DBL** (see page 5/83).

Selection :
pages 5/194 to 5/225

Characteristics :
pages 5/50 to 5/55

Dimensions :
pages 5/92 to 5/95

Schemes :
pages 5/96 and 5/97

5/62

Schneider
Electric

References

TeSys contactors


TeSys D contactors for motor control
up to 30 kW at 400 V, in category AC-3
For connection by spring terminals

526221



LC1 D123••

526222



LC1 D65A3••

3-pole contactors										Weight (3)
Standard power ratings of 3-phase motors 50-60 Hz in category AC-3 ($\theta \leq 60^\circ\text{C}$)								Rated operational current in AC-3 440 V up to	Instantaneous auxiliary contacts	
220 V	380 V	415 V	440 V	500 V	660 V	1000 V				
230 V	400 V			690 V						
kW	kW	kW	kW	kW	kW	kW	A			kg
Power and control connections by spring terminals										
2.2	4	4	4	5.5	5.5		9	1	1	LC1 D093••
3	5.5	5.5	5.5	7.5	7.5		12	1	1	LC1 D123••
4	7.5	9	9	10	10		18	1	1	LC1 D183••
5.5	11	11	11	15	15		25	1	1	LC1 D253••
7.5	15	15	15	18.5	18.5		32 (4)	1	1	LC1 D323••
Power connections by EverLink® BTR screw connectors (5) and control by spring terminals										
11	18.5	22	22	22	30		40	1	1	LC1 D40A3•• (6)
15	22	25	30	30	33		50	1	1	LC1 D50A3•• (6)
18.5	30	37	37	37	37		65	1	1	LC1 D65A3•• (6)
Connection by Faston connectors										
These contactors are fitted with Faston connectors: 2 x 6.35 mm on the power poles and 1 x 6.35 mm on the coil and auxiliary terminals.										
For contactors LC1 D09 and LC1 D12 only, replace the figure 3 with a 9 in the references selected above. Example: LC1 D093•• becomes LC1 D099••.										

Separate components

Auxiliary contact blocks and add-on modules: see pages 5/78 to 5/85.

5

(1) LC1 D09 to D32: clip-on mounting on 35 mm L rail AM1 DP or screw fixing.

(2) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply	24	42	48	110	115	220	230	240	380	400	415	440
LC1 D09...D65A	B7	D7	E7	F7	FE7	M7	P7	U7	Q7	V7	N7	R7
d.c. supply												
Volts	12	24	36	48	60	72	110	125	220	250	440	
LC1 D09...D65A (coils with built-in suppression as standard, by bi-directional peak limiting diode)												
U 0.75...1.25 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD	
Low consumption												
Volts ...	5	12	20	24	48	110	220	250				
LC1 D09...D32 (coils with integral suppression device fitted as standard)												
U 0.8...1.25 Uc	AL	JL	ZL	BL	EL	FL	ML	UL				

For other voltages between 5 and 690 V, see pages 5/86 to 5/91.

(3) The weights indicated are for contactors with a.c. control circuit.

For d.c. or low consumption control circuit, add 0.160 kg from LC1 D09 to D32 and 0.075 kg from LC1 D40A to D65A.

(4) Must be wired with 2 x 4 mm² cables in parallel on the upstream side. On the downstream side, outgoing terminal block LAD 331 may be used (Quickfit technology, see page 1/197). When wired with a single cable, the product is limited to 25 A (11 kW/400 V motors).

(5) BTR screws: hexagon socket head. In accordance with local electrical wiring regulations, a size 4 insulated Allen key must be used (reference LAD ALLEN4, see page 5/85).

(6) For low consumption kit LA4 DBL (see page 5/83).

Selection :
pages 5/194 to 5/225

Characteristics :
pages 5/50 to 5/55

Dimensions :
pages 5/92 to 5/95

Schemes :
pages 5/96 and 5/97

Schneider
Electric

5/63

References

TeSys contactors

TeSys D, 3-pole contactors
for control in category AC-1, from 25 to 200 A



LC1 D09**



LC1 D65A**

5

3-pole contactors				Basic reference, to be completed by adding the control voltage code (1)	Weight (3)		
Non inductive loads maximum current ($\theta \leq 60^\circ\text{C}$) utilisation category AC-1	Number of poles	Instant- aneous auxiliary contacts	Fixing (2)				
A							
Connection by screw clamp terminals							
25	3	1	1	LC1 D09**	0.320		
				or LC1 D12**	0.325		
32	3	1	1	LC1 D18**	0.330		
40	3	1	1	LC1 D25**	0.370		
50	3	1	1	LC1 D32**	0.375		
				or LC1 D38**	0.380		
Connection by EverLink®, BTR screw connectors (4)							
60	3	1	1	LC1 D40A** (7)	0.850		
80	3	1	1	LC1 D50A** (7)	0.855		
				or LC1 D65A** (5) (7)	0.860		
Connection by screw clamp terminals or connectors							
125	3	1	1	LC1 D80**	1.590		
				or LC1 D95** (5)	1.610		
200	3	1	1	LC1 D115**	2.500		
				or LC1 D150** (6)	2.500		

3-pole contactors for connection by lugs

In the references selected above, insert a figure 6 before the voltage code.
Example: LC1 D09** becomes LC1 D096**.

(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply													
Volts	24	42	48	110	115	220	230	240	380	400	415	440	500
LC1 D09...D150 (coils D115 and D150 fitted with integral suppression device as standard)													
50/60 Hz	B7	D7	E7	F7	FE7	M7	P7	U7	Q7	V7	N7	R7	-
LC1 D80...D150													
50 Hz	B5	D5	E5	F5	FE5	M5	P5	U5	Q5	V5	N5	R5	S5
60 Hz	B6	-	E6	F6	-	M6	-	U6	Q6	-	-	R6	-
d.c. supply													
Volts	12	24	36	48	60	72	110	125	220	250	440		
LC1 D09...D65A (coils with integral suppression device fitted as standard)													
U 0.7...1.25 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD		
LC1 or LP1 D80 and D95													
U 0.85...1.1 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD		
U 0.75...1.2 Uc	JW	BW	CW	EW	-	SW	FW	-	MW	-	-		
LC1 D115 and D150 (coils with integral suppression device fitted as standard)													
U 0.75...1.2 Uc	-	BD	-	ED	ND	SD	FD	GD	MD	UD	RD		
Low consumption													
Volts	5	12	20	24	48	110	220	250					
LC1 D09...D38 (coils with integral suppression device fitted as standard)													
U 0.8...1.25 Uc	AL	JL	ZL	BL	EL	FL	ML	UL					

For other voltages between 5 and 690 V, see pages 5/86 to 5/91.

(2) LC1 D09 to D65A: clip-on mounting on 35 mm \sqcup rail AM1 DP or screw fixing.

LC1 D80 and D95 ~: clip-on mounting on 35 mm \sqcup rail AM1 DP or 75 mm \sqcup rail AM1 DL or screw fixing.

LC1 or LP1 D80 to D95 -: clip-on mounting on 75 mm \sqcup rail AM1 DL or screw fixing.

LC1 D115 and D150: clip-on mounting on 2 x 35 mm \sqcup rails AM1 DP or screw fixing.

(3) The weights indicated are for contactors with a.c. control circuit. For d.c. or low consumption control circuit, add 0.160 kg from LC1 D09 to D38, 0.075 kg from LC1 D40A to D65A and 1 kg for LC1 D80 and D95.

(4) BTR screws: hexagon socket head. In accordance with local electrical wiring regulations, a size 4 insulated Allen key must be used (reference LAD ALLEN4, see page 5/85).

(5) Selection according to the number of operating cycles, see AC-1 curve, page 5/198.

(6) 32 A with 2 x 4 mm² cables connected in parallel.

(7) For low consumption kit LA4 DBL (see page 5/83).

Selection :
pages 5/194 to 5/225

Characteristics :
pages 5/50 to 5/55

Dimensions :
pages 5/92 to 5/95

Schemes :
pages 5/96 and 5/97

5/64

Schneider
Electric

References (continued)

TeSys contactors

TeSys D, 3-pole contactors

For control in category AC-1, 25 to 200 A

526232



LC1 D123••

526233



LC1 D65A3••

5

3-pole contactors for connection by Faston connectors

These contactors are fitted with Faston connectors: 2 x 6.35 mm on the power poles and 1 x 6.35 mm on the coil terminals. For contactors LC1 D09 and LC1 D12 only, in the references selected from the previous page, insert a figure 9 before the voltage code. Example: LC1 D09•• becomes LC1 D099••.

3-pole contactors

Non inductive loads maximum current ($\theta \leq 60^\circ \text{C}$) utilisation category AC-1	Number of poles	Instant- aneous auxiliary contacts	Basic reference, to be completed by adding the control voltage code (1)	Weight (3)
			Fixing (2)	
A				kg
Connection by spring terminals				
16	3	1 1	LC1 D093•• (4) or LC1 D123•• (4)	0.320 0.325
25	3	1 1	LC1 D183•• (5) or LC1 D253•• (6) or LC1 D323•• (6)	0.335 0.325 0.325

Power connections by EverLink® BTR screw connectors (7) and control by spring terminals

60	3	1 1	LC1 D40A3•• (9)	0.850
80	3	1 1	LC1 D50A3•• (8) (9) or LC1 D65A3•• (8) (9)	0.855 0.860

Separate components

Auxiliary contact blocks and add-on modules: see pages 5/78 to 5/85.

(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply

Volts	24	42	48	110	115	220	230	240	380	400	415	440	500
-------	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

LC1 D09...D65A

50/60 Hz	B7	D7	E7	F7	FE7	M7	P7	U7	Q7	V7	N7	R7	S7
----------	----	----	----	----	-----	----	----	----	----	----	----	----	----

d.c. supply

Volts	12	24	36	48	60	72	110	125	220	250	440
-------	----	----	----	----	----	----	-----	-----	-----	-----	-----

LC1 D09...D65A (coils with integral suppression device fitted as standard)

U 0.75...1.25 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD
------------------	----	----	----	----	----	----	----	----	----	----	----

Low consumption

Volts ==	5	12	20	24	48	110	220	250
----------	---	----	----	----	----	-----	-----	-----

LC1 D09...D38 (coils with integral suppression device fitted as standard)

U 0.8...1.25 Uc	AL	JL	ZL	BL	EL	FL	ML	UL
-----------------	----	----	----	----	----	----	----	----

For other voltages between 5 and 690 V, see pages 5/86 to 5/91.

(2) **LC1 D09 to D65A:** clip-on mounting on 35 mm L-shaped rail **AM1 DP** or screw fixing.

(3) The weights indicated are for contactors with a.c. control circuit. For d.c. or low consumption control circuit, add 0.160 kg from **LC1 D09 to D38** and 0.075 kg from **LC1 D40A to D65A**.

(4) 20 A with 2 x 2.5 mm² cables connected in parallel.

(5) 32 A with 2 x 4 mm² cables connected in parallel.

(6) 40 A with 2 x 4 mm² cables connected in parallel.

(7) BTR screws: hexagon socket head. In accordance with local electrical wiring regulations, a size 4 insulated Allen key must be used (reference **LAD ALLEN4**, see page 5/85).

(8) Selection according to the number of operating cycles, see AC-1 curve, page 5/198.

(9) For low consumption kit **LA4 DBL** (see page 5/83).

Selection :
pages 5/194 to 5/225

Characteristics :
pages 5/50 to 5/55

Dimensions :
pages 5/92 to 5/95

Schemes :
pages 5/96 and 5/97

Schneider
Electric

5/65

References (continued)

TeSys contactors

TeSys D, 4-pole contactors

For control in category AC-1, 25 to 200 A

526227



LC1 DT20••

526228



LC1 DT80A••

5

526229



LC1 D65008••

4-pole contactors for connection by screw clamp terminals or connectors

Non inductive loads maximum current ($\theta \leq 60^\circ \text{C}$) utilisation category AC-1	Number of poles	Instantaneous auxiliary contacts	Basic reference, to be completed by adding the control voltage code (1)	Weight (3)
			Fixing (2)	
A				
Connection by screw clamp terminals				
20	4	—	1 1	LC1 DT20•• 0.365
	2	2	1 1	LC1 D098•• 0.365
25	4	—	1 1	LC1 DT25•• 0.365
	2	2	1 1	LC1 D128•• 0.365
32	4	—	1 1	LC1 DT32•• 0.425
	2	2	1 1	LC1 D188•• 0.425
40	4	—	1 1	LC1 DT40•• 0.425
	2	2	1 1	LC1 D258•• 0.425
Connection by EverLink®, BTR screw connectors				
60	4	—	1 1	LC1 DT60A•• 1.090
80	4	—	1 1	LC1 DT80A•• 1.150
Connection by screw clamp terminals or connectors				
60	2	2	— —	LC1 D40008•• 1.440
				or LP1 D40008•• 2.210
80	2	2	— —	LC1 D65008•• 1.450
				or LP1 D65008•• 2.220
125	4	—	— —	LC1 D80004•• 1.760
				or LP1 D80004•• 2.685
	2	2	— —	LC1 D80008•• 1.840
				or LP1 D80008•• 2.910
200	4	—	— —	LC1 D115004•• 2.860

4-pole contactors for connection by lugs or bars

In the references selected above, insert a figure 6 before the voltage code.

Example: LC1 DT20•• becomes LC1 DT206••.

(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply

Volts	24	42	48	110	115	220	230	240	380	400	415	440	500
LC1 D09...D150 and LC1 DT20...DT80A (coils D115 and D150 fitted with integral suppression device as standard)													
50/60 Hz	B7	D7	E7	F7	FE7	M7	P7	U7	Q7	V7	N7	R7	—
LC1 D80...D115													
50 Hz	B5	D5	E5	F5	FE5	M5	P5	U5	Q5	V5	N5	R5	S5
60 Hz	B6	—	E6	F6	—	M6	—	U6	Q6	—	—	R6	—

d.c. supply

Volts	12	24	36	48	60	72	110	125	220	250	440
-------	----	----	----	----	----	----	-----	-----	-----	-----	-----

LC1 D09...D65A and LC1 DT20...DT80A (coils with integral suppression device fitted as standard)

U 0.7...1.25 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD
-----------------	----	----	----	----	----	----	----	----	----	----	----

LC1 or LP1 D80

U 0.85...1.1 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD
-----------------	----	----	----	----	----	----	----	----	----	----	----

U 0.75...1.2 Uc	JW	BW	CW	EW	—	SW	FW	—	MW	—	—
-----------------	----	----	----	----	---	----	----	---	----	---	---

LC1 D115 (coils with integral suppression device fitted as standard)

U 0.75...1.2 Uc	—	BD	—	ED	ND	SD	FD	GD	MD	UD	RD
-----------------	---	----	---	----	----	----	----	----	----	----	----

Low consumption

Volts	5	12	20	24	48	110	220	250
-------	---	----	----	----	----	-----	-----	-----

LC1 D09...D38 and LC1 DT20...DT40 (coils with integral suppression device fitted as standard)

U 0.8...1.25 Uc	AL	JL	ZL	BL	EL	FL	ML	UL
-----------------	----	----	----	----	----	----	----	----

For other voltages between 5 and 690 V, see pages 5/86 to 5/91.

(2) LC1 D09 to D38 and LC1 DT20 to DT80A: clip-on mounting on 35 mm L rail AM1 DP or screw fixing.

LC1 D80 ~: clip-on mounting on 35 mm L rail AM1 DP or 75 mm L rail AM1 DL or screw fixing.

LC1 or LP1 D80 ~: clip-on mounting on 75 mm L rail AM1 DL or screw fixing.

LC1 D115 and D150: clip-on mounting on 2 x 35 mm L rails AM1 DP or screw fixing.

(3) The weights indicated are for contactors with a.c. control circuit. For d.c. or low consumption control circuit, add 0.160 kg from LC1 D09 to D38, 0.075 kg from LC1 DT60A and D80A and 1 kg for LC1 D80.

Selection :
pages 5/194 to 5/225

Characteristics :
pages 5/50 to 5/55

Dimensions :
pages 5/92 to 5/95

Schemes :
pages 5/96 and 5/97

5/66

Schneider
Electric


References (continued)

TeSys contactors

TeSys D, 4-pole contactors

For control in category AC-1, 25 to 200 A

4-pole contactors

Non inductive loads maximum current ($\theta \leq 60^\circ\text{C}$) utilisation category AC-1	Number of poles	Instan- taneous auxiliary contacts	Basic reference, to be completed by adding the voltage code (1)	Weight (3)
			Fixing (2)	
A				
Connection by spring terminals				
20	4 – 1 1		LC1 DT203••	0.380
	2 2 1 1		LC1 D0983••	0.380
25	4 – 1 1		LC1 DT253••	0.380
	2 2 1 1		LC1 D1283••	0.380
32	4 – 1 1		LC1 DT323••	0.425
	2 2 1 1		LC1 D1883••	0.425
40	4 – 1 1		LC1 DT403••	0.425
	2 2 1 1		LC1 D2583••	0.425
Connection by by EverLink®, BTR screw connectors and control circuit by spring terminals				
60	4 – 1 1		LC1 DT60A3••	1.090
80	4 – 1 1		LC1 DT80A3••	1.150

Separate components

Auxiliary contact blocks and add-on modules: see pages 5/78 to 5/85.

(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply

Volts	24	42	48	110	115	220	230	240	380	400	415	440	500
-------	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

LC1 D09...D25 and LC1 DT20...DT80A (coils with integral suppression device fitted as standard)

50/60 Hz	B7	D7	E7	F7	FE7	M7	P7	U7	Q7	V7	N7	R7	–
----------	----	----	----	----	-----	----	----	----	----	----	----	----	---

d.c. supply

Volts	12	24	36	48	60	72	110	125	220	250	440
-------	----	----	----	----	----	----	-----	-----	-----	-----	-----

LC1 D09...D25 and LC1 DT20...DT80A (coils with integral suppression device fitted as standard)

U 0.7...1.25 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD
-----------------	----	----	----	----	----	----	----	----	----	----	----

Low consumption

Volts ==	5	12	20	24	48	110	220	250
----------	---	----	----	----	----	-----	-----	-----

LC1 D09...D25 and LC1 DT20...DT40 (coils with integral suppression device fitted as standard)

U 0.8...1.25 Uc	AL	JL	ZL	BL	EL	FL	ML	UL
-----------------	----	----	----	----	----	----	----	----

For other voltages between 5 and 690 V, see pages 5/86 to 5/91.


(2) LC1 D09 to D38 and LC1 DT20 to DT80A: clip-on mounting on 35 mm U_L rail AM1DP or screw fixing.

(3) The weights indicated are for contactors with a.c. control circuit. For d.c. or low consumption control circuit, add 0.160 kg from LC1 D09 to D38, 0.075 kg for LC1 DT60A and DT80A.

Presentation

TeSys contactors

for the North American market,
conforming to UL and CSA



- 1 Motor Disconnect (Disconnect switch)
- 2 Motor Branch Circuit Protection (Short-circuit protection)
- 3 Motor Controller (Contactor)
- 4 Motor Overload Protection (Thermal overload relay)

5

Starters for the North American market

In recent years, the North American market has started to harmonise UL, CSA and ANCE standards, as well as the industrial installation codes provided by national regulations (NEC for the United States, CEC for Canada and MEC for Mexico). (1)

Major improvements, carried out by the Canena (2) are aimed at harmonising product requirements based on IEC (3) standards.

However, the North American codes use specific terminology for defining the functions of a starter.

These functions can be fulfilled by standard IEC products, accompanied by appropriate certifications.

Combination Starters

Combination Starters are the most common type of packaged motor starter. They are called "Combination" because of their structure and their combined functions.

The figure opposite shows the four combined functions that constitute a complete motor starter circuit, defined as a "Motor branch circuit" by the NEC (US National Electric Code) in article 430. Standard UL508 currently gives different types of combination starter that meet the requirements of a "Motor branch circuit".

Type E, called "**self-protected combination starter**", covers all these functions and can be controlled manually (thermal-magnetic circuit-breaker) or remotely (starter-controller). Type E starters withstand faults within their declared nominal rating without sustaining damage, after which they can be put back into service. In addition, they can withstand more severe short-circuit and durability performance tests without welding or excessive wear of the contact tips.

Type F, called "**Combination motor starter**", consists of a type E manual starter (thermal-magnetic circuit-breaker) combined with a contactor. These starters are evaluated by means of basic short-circuit tests, but are not considered as "self-protected".

For this combination, the type E starter must be marked "Combination Motor Controller when used with ...", followed by the reference of the load side contactor.

(1) **UL**: Underwriters Laboratories, **CSA**: Canadian Standards Association, **ANCE**: Association of Standardization and Certification, **NEC**: National Electric Code, **CEC**: Canadian Electrical Code, **MEC**: Mexican Electrical Code.

(2) **Canena**: Council for Harmonization of Electrotechnical Standardization of North America.

(3) **IEC**: International Electrotechnical Commission.

*Presentation (continued)***TeSys contactors**

for the North American market,
conforming to UL and CSA

Control panels

To help users properly coordinate their motor control equipment with their distribution system in the event of a fault, article 409 of the 2005 NEC requires panel builders to list the short-circuit withstand rating of their motor control panels.

According to standard UL508A, manufacturers must use the short-circuit withstand value of the lowest rated device as the nominal withstand rating of the panel, unless the devices have been tested together for a higher coordinated rating.
The minimum "**short-circuit current rating**" (SCCR), on motor control components for horsepower ratings of 50 hp or below is 5 000 A.

Using a **type E** or **type F** combination starter eliminates the coordination problems of using individual components for the "motor branch circuit protection", "motor controller" and "motor overload protection" functions.

The panel builder uses the declared short-circuit current rating for the combination starter. This value is generally higher than 5 000 A.
This makes it easier to list the short-circuit current ratings and to check the compatibility of a UL508A motor control panel within a given distribution system.

Presentation (continued)

TeSys contactors

for the North American market,
conforming to UL and CSA

Group protection

Article 430.53 of the NEC allows a single short-circuit protection device to be used for more than one motor circuit if the components used are marked and listed for such use.

Components suitable for use in group protection, known as "**motor group installations**", can be marked in one of the following two ways:

Case n° 1

The contactor and the motor overload relay are both listed as suitable for group installation.

An inverse time circuit-breaker can be used as the short-circuit protection device if it is also listed as suitable for group installation.

The panel builder must therefore make sure that the short-circuit protection device selected (fuses or inverse time circuit-breaker) does not exceed the value allowed by article 430.40 for the smallest overload relay used in the circuit.

Once these conditions have been met, the panel builder can reduce the size of the conductor connecting the short-circuit protection device to the individual motor contactor/overload relay, to one third of the size of the upstream circuit conductor supplying the protection device.

The panel builder must limit the length of the motor starter conductor (connecting the short-circuit protection device to the motor contactor/overload relay) to a maximum of 7.6 m (25 feet).

Case n° 2

The motor contactor and overload relay are listed as suitable for "**tap conductor protection**" in group installations.

This category allows the panel designer to reduce the size of the conductor connecting the short-circuit protection device to the individual motor contactor/overload relay, to one tenth of the size of the upstream circuit conductor supplying the protection device.

The designer must limit the length of this conductor to a maximum of 3.05 m (10 feet).

In both cases, the supply circuits must not be less than 125 % of the connected motor FLA (Full Load Amps) rating.

For panel builders, using **type F** combination starters in group installations simplifies group motor considerations.

Each starter is a fully coordinated motor branch circuit.

The panel builder follows the same NEC requirements for sizing the supply conductors as those required for single motor branch circuits.

The size of the supply conductors can be reduced in accordance with the specifications of article 430.28.

This allows the same flexibility in conductor sizing as that offered in article 430.53 (D), without a requirement to check the short-circuit protection rating marked on the components and the overload relay limit.

A UL508A panel does not need a short-circuit protection device when each motor starter installed is a **type F**.

The upstream short-circuit protection device supplying the starter protects the panel. The panel builder only has to consider the panel/enclosure disconnect requirements specified by the NEC or local codes.

Reference

TeSys contactors

for the North American market,
conforming to UL and CSA standards, 20 to 200 A



LC1 D09••



LC1 D25••



LC1 D65A••



LC1 D95••

Contactors

Standard power ratings of motors 50/60 Hz		Size		Associated continuous current		Type of contactor required
Single-phase 1 Ø	3-phase 3 Ø	cable type	75 °C-Cu			Basic reference, to be completed (1)
115 V 230 V 240 V	200 V 208 V 240 V	230 V 460 V 480 V 600 V	575 V			Fixing, connection (2)
HP	HP	HP	HP	HP	A	

Connection by screw clamp terminals

0.5	1	2	2	5	7.5	00	AWG10	20	LC1 D09••
1	2	3	3	7.5	10	0	AWG10	25	LC1 D12••
1	3	5	5	10	15	0	AWG8	32	LC1 D18••
2	3	5	7.5	15	20	1	AWG6	40	LC1 D25••
2	5	7.5	10	20	30	1	AWG6	50	LC1 D32••

Power connections by EverLink® BTR screw connectors (4) and control by spring terminals

3	5	10	10	30	30	2	AWG3	60	LC1 D40A••
3	7.5	15	15	40	40	2	AWG3	70	LC1 D50A••
5	10	20	20	40	50	2	AWG3	80	LC1 D65A••

Connection by screw clamp terminals or connectors

7.5	15	20	25	60	60	2	AWG2	110	LC1 D80••
7.5	15	20	25	60	60	2	AWG2	110	LC1 D95••
-	-	30	40	75	100	3	AWG2/0	175	LC1 D115••
-	-	40	50	100	125	4	AWG3/0	200	LC1 D150••

Applications with High-Fault Short-Circuit ratings

For contactors LC1 D40A to LC1 D65A, the High-Fault Short-Circuit ratings are 50 kA at 480 V and 25 kA at 600 V.
If these contactors are used, stick the LAD UL1 warning sticker on the enclosure door..

Description	Language	Sold in lots of	Reference
Warning sticker	English, Spanish, French	10	LAD UL1

Application example

For a 15 HP-230 V motor

Select a contactor type LC1 D50A.

Information: the contactor rating selected corresponds to "size 2", the associated cable is type AWG3 75 °C-Cu.

(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply	Volts	24	42	48	110	115	220	230	240	380	400	415	440	500
LC1 D09...D150 (D115 and D150 coils with integral suppression device fitted as standard)														
50/60 Hz	B7	D7	E7	F7	FE7	M7	P7	U7	Q7	V7	N7	R7	S7	
LC1 D80...D115	B5	D5	E5	F5	FE5	M5	P5	U5	Q5	V5	N5	R5	S5	
50 Hz	B6	-	E6	F6	-	M6	-	U6	Q6	-	-	R6	-	
d.c. supply	Volts	12	24	36	48	60	72	110	125	220	250	440		
LC1 D09...D65A (coils with integral suppression device fitted as standard)														
U 0.7...1.25 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD			
U 0.75...1.2 Uc	JW	BW	CW	EW	-	SW	FW	-	MW	-	-			
LC1 D115 and D150 (coils with integral suppression device fitted as standard)														
U 0.75...1.2 Uc	-	BD	-	ED	ND	SD	FD	GD	MD	UD	RD			

Low consumption

Volts ==	5	12	20	24	48	110	220	250
LC1 D09...D38 (coils with integral suppression device fitted as standard)								

U 0.7...1.25 Uc	AL	JL	ZL	BL	EL	FL	ML	UL
-----------------	----	----	----	----	----	----	----	----

(2) **LC1 D09 to D65A:** clip-on mounting on 35 mm L rail AM1 DP or screw fixing.

LC1 D80 and LC1 D95: clip-on mounting on 35 mm L rail AM1 DP or 75 mm L rail AM1 DL or screw fixing.

LC1 D115 and D150: clip-on mounting on 2 x 35 mm L rails AM1 DP or screw fixing.

References

TeSys contactors

TeSys D, 3-pole reversing contactors for motor control up to 75 kW at 400 V, in category AC-3
Horizontally mounted, pre-assembled



LC2D12●●



LC2D65A●●



LC2D115●●

5

3-pole reversing contactors for connection by screw clamp terminals

Pre-wired power connections.

Standard power ratings of 3-phase motors 50-60 Hz in category AC-3 (θ ≤ 60 °C)								Rated operational current in AC-3 440 V up to	Instantaneous auxiliary contacts per contactor	Contactors supplied with coil Basic reference, to be completed by adding the control voltage code (2)	Weight (3)
220 V	380 V	415 V	440 V	500 V	660 V	1000 V				Fixing (1)	
230 V	400 V				690 V						
kW	kW	kW	kW	kW	kW	kW	A			kg	
With mechanical interlock, without electrical interlocking, for connection by screw clamp terminals or connectors											
2.2	4	4	4	5.5	5.5	—	9	1	1	LC2D09●● (4)	0.687
3	5.5	5.5	5.5	7.5	7.5	—	12	1	1	LC2D12●● (4)	0.697
4	7.5	9	9	10	10	—	18	1	1	LC2D18●● (4)	0.707
5.5	11	11	11	15	15	—	25	1	1	LC2D25●● (4)	0.787
7.5	15	15	15	18.5	18.5	—	32	1	1	LC2D32●● (4)	0.797
9	18.5	18.5	18.5	18.5	18.5	—	38	1	1	LC2D38●● (4)	0.807
11	18.5	22	22	22	30	—	40	1	1	LC2D40A●● (5)	1.870
15	22	25	30	30	33	—	50	1	1	LC2D50A●● (5)	1.880
18.5	30	37	37	37	37	—	65	1	1	LC2D65A●● (5)	1.890
22	37	45	45	55	45	—	80	1	1	LC2D80●●	3.200
25	45	45	45	55	45	—	95	1	1	LC2D95●●	3.200

With mechanical interlock and electrical interlocking, for connection by screw clamp terminals or connectors

30	55	59	59	75	80	65	115	1	1	LC2D115●●	6.350
40	75	80	80	90	100	75	150	1	1	LC2D150●●	6.400

Connection by lugs or bars

For reversing contactors LC2D09 to LC2D38, LC2D115 and LC2D150, in the references selected above, insert a figure 6 before the voltage code. Example: LC2D09●● becomes LC2D096●●.

To build a 40 to 65 A reversing contactor, for connection by lugs, order 2 contactors LC1D●●A6 and mechanical interlock LAD4CM (see page 5/76).

Component parts

Auxiliary contact blocks and add-on modules: see pages 5/78 to 5/85.

(1) LC2D09 to D65A: clip-on mounting on 35 mm U rail AM1 DP or screw fixing.

LC2D80 and D95: clip-on mounting on 35 mm U rail AM1 DP or 75 mm U rail AM1 DL or screw fixing.

LC2D115 and D150: clip-on mounting on 35 mm U rail AM1 DP or screw fixing.

(2) Standard control circuit voltages (for other voltages between 16 and 690 V, please consult your Regional Sales Office):

a.c. supply

Volts	24	42	48	110	115	220	230	240	380	400	415	440	500
-------	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

LC2D09...D150 (D115 and D150 coils with integral suppression device fitted as standard))

50/60 Hz	B7	D7	E7	F7	FE7	M7	P7	U7	Q7	V7	N7	R7	S7
----------	----	----	----	----	-----	----	----	----	----	----	----	----	----

LC2D80...D115

50 Hz	B5	D5	E5	F5	FE5	M5	P5	U5	Q5	V5	N5	R5	S5
-------	----	----	----	----	-----	----	----	----	----	----	----	----	----

60 Hz	B6	—	E6	F6	—	M6	—	U6	Q6	—	—	R6	—
-------	----	---	----	----	---	----	---	----	----	---	---	----	---

d.c. supply

Volts	12	24	36	48	60	72	110	125	220	250	440
-------	----	----	----	----	----	----	-----	-----	-----	-----	-----

LC2D09...D65A (coils with integral suppression device fitted as standard)

U 0.75...1.25 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD
------------------	----	----	----	----	----	----	----	----	----	----	----

Low consumption

Volts	5	12	20	24	48	110	220	250
-------	---	----	----	----	----	-----	-----	-----

LC2D09...D38 (coils with integral suppression device fitted as standard)

U 0.8...1.25 Uc	AL	JL	ZL	BL	EL	FL	ML	UL
-----------------	----	----	----	----	----	----	----	----

For other voltages between 5 and 690 V, see pages 5/86 to 5/91.

(3) The weights indicated are for contactors with a.c. control circuit. For d.c. or low consumption control circuit, add 0.330 kg for LC2D09 to D38, 0.150 kg for LC1D40A to D65A.

(4) For reversing contactors with electrical interlocking pre-wired at the factory, add suffix V to the references selected above.

Example: LC2D09P7 becomes LC2D09P7V.

(5) For low consumption kit LA4 DBL (see page 5/83).

Note: when assembling a reversing contactor, it is good practice to incorporate a 50 ms time delay.

Selection :
pages 5/194 to 5/225

Characteristics :
pages 5/50 to 5/55

Dimensions, schemes :
pages 5/98 and 5/99

5/72

Schneider
Electric

References

TeSys contactors

TeSys D, 3-pole reversing contactors for motor control up to 15 kW at 400 V, in category AC-3
Horizontally mounted, pre-assembled

526174



LC2 D123••

3-pole reversing contactors, for connection by spring terminals

Pre-wired power connections.

Mechanical interlock without electrical interlocking.

Standard power ratings of 3-phase motors 50-60 Hz in category AC-3 ($\theta \leq 60^\circ\text{C}$)	Rated operational current in AC-3 440 V up to	Instantaneous auxiliary contacts per contactor	Contactors supplied with coil Basic reference, to be completed by adding the voltage code (2)	Weight (3)
220 V 380 V 415 V 440 V 500 V 660 V 230 V 400 V 690 V			Fixing (1)	
kW kW kW kW kW kW A				kg
For connection by spring terminals				
2.2 4 4 4 5.5 5.5 9	1 1	1 1	LC2 D093••	0.687
3 5.5 5.5 5.5 7.5 7.5 12	1 1	1 1	LC2 D123••	0.697
4 7.5 9 9 10 10 18	1 1	1 1	LC2 D183••	0.707
5.5 11 11 11 15 15 25	1 1	1 1	LC2 D253••	0.787
7.5 15 15 15 18.5 18.5 32 (4)	1 1	1 1	LC2 D323••	0.797
Power connection by EverLink®, BTR screw connectors (5) and control by spring terminals				
11 18.5 22 22 22 30 40	1 1	1 1	LC2 D40A3•• (6)	1.870
15 22 25 30 30 33 50	1 1	1 1	LC2 D50A3•• (6)	1.880
18.5 30 37 37 37 37 65	1 1	1 1	LC2 D65A3•• (6)	1.890

For connection by Faston connectors

All power connections are to be made by the customer.

These contactors are fitted with Faston connectors: 2 x 6.35 mm on the power poles and 1 x 6.35 mm on the coil terminals.

For reversing contactors LC2 D09 and LC2 D12 only, in the references selected above, replace the figure 3 before the voltage code with a figure 9.

Example: LC2 D093•• becomes LC2 D099••.

5

Component parts

Auxiliary contact blocks and add-on modules: see pages 5/78 to 5/85.

(1) LC2 D09 to D32: clip-on mounting on 35 mm U rail AM1 DP or screw fixing.

(2) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply	24	42	48	110	115	220	230	240	380	400	415	440	500
LC2 D09...D65A													
50/60 Hz	B7	D7	E7	F7	FE7	M7	P7	U7	Q7	V7	N7	R7	S7
d.c. supply	12	24	36	48	60	72	110	125	220	250	440		
LC2 D09...D65A (coils with integral suppression device fitted as standard)													
U 0.75...1.25 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD		
Low consumption	5	12	20	24	48	110	220	250					
LC2 D09...D38 (coils with integral suppression device fitted as standard)													
U 0.8...1.25 Uc	AL	JL	ZL	BL	EL	FL	ML	UL					

For other voltages between 5 and 690 V, see pages 5/86 to 5/91.

(3) The weights indicated are for reversing contactors with a.c. control circuit. For d.c. or low consumption control circuit, add 0.330 kg for LC2 D09 to D38, 0.150 kg for LC1 D40A to D65A.

(4) Must be wired with 2 x 4 mm² cables in parallel on the upstream side. On the downstream side, outgoing terminal block LAD 331 may be used (Quickfit technology, see page 1/197). When wired with a single cable, the product is limited to 25 A (11 kW/400 V motors).

(5) BTR screws: hexagon socket head. In accordance with local electrical wiring regulations, a size 4 insulated Allen key must be used (reference LAD ALLEN4, see page 5/85).

(6) For low consumption kit LA4 DBL (see page 5/83).

Selection :
pages 5/194 to 5/225

Characteristics :
pages 5/50 to 5/55

Dimensions, schemes :
pages 5/98 and 5/99

Schneider
Electric

5/73

References

TeSys contactors

TeSys D, 4-pole changeover contactor pairs
for control in category AC-1,
20 to 200 A



LC2 DT20••

Pre-assembled. Pre-wired power connections.

For connection by screw clamp terminals or connectors

LC2 DT20 to LC2 DT40: mechanical interlock without electrical interlocking.

LC2 D80004: order separately 2 auxiliary contact blocks LAD N•1 to obtain electrical interlocking between the 2 contactors (see page 5/79). For electrical interlocking incorporated in the mechanical interlock, please consult your Regional Sales Office.

LC2 D115004: mechanical interlock with integral, pre-wired electrical interlocking.

Utilisation category AC-1 Non-inductive loads	Instantaneous auxiliary contacts per contactor	Contactors supplied with coil Basic reference, to be completed by adding the voltage code (1)	Weight
A		Fixing (2)	kg
20	1 1	LC2 DT20••	0.730
25	1 1	LC2 DT25••	0.730
32	1 1	LC2 DT32••	0.850
40	1 1	LC2 DT40••	0.850
125	— —	LC2 D80004••	3.200
200	— —	LC2 D115004••	7.400

For connection by lugs or bars

20	1 1	LC2 DT206••	0.730
25	1 1	LC2 DT256••	0.730
32	1 1	LC2 DT326••	0.850
40	1 1	LC2 DT406••	0.850

For customer assembly.

For connection by screw clamp terminals or connectors

60	1 1	LC1 DT60A•• (3)	—
80	1 1	LC1 DT80A•• (3)	—

For connection by lugs or bars

60	1 1	LC1 DT60A6•• (3)	—
80	1 1	LC1 DT80A6•• (3)	—

Accessories

Auxiliary contact blocks and add-on modules: see pages 5/78 to 5/85.

(1) See note (1) on next page.

(2) LC2 DT20 to LC2 DT80: clip-on mounting on 35 mm U rail AM1 DP or screw fixing.

LC2 D80: clip-on mounting on 35 mm U rail AM1 DP or 75 mm U rail AM1 DL or screw fixing.

LC2 D115: clip-on mounting on 2 x 35 mm U rails AM1 DP or screw fixing.

(3) For these operational currents, order 2 identical contactors and a mechanical interlock LAD 4CM (see page 5/76).

Note: when assembling changeover contactor pairs, it is good practice to incorporate a 50 ms time delay.

References

TeSys contactors

TeSys D, 4-pole changeover contactor pairs
for control in category AC-1, 20 A

Pre-assembled. Pre-wired power connections.

For connection by spring terminals.

Utilisation category AC-1 Non-inductive loads Maximum rated operational current ($\theta \leq 60^\circ\text{C}$)	Instantaneous auxiliary contacts per contactor	Contactors supplied with coil	Weight
A 20	1 1	LC2 DT203••	0.760

For customer assembly.

Power connection by EverLink®, BTR screw connectors (3) and control by spring terminals

60	1 1	LC1 DT60A3•• (4)	-
80	1 1	LC1 DT80A3•• (4)	-

Separate components

Auxiliary contact blocks and add-on modules: see pages 5/78 to 5/85.

(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

a.c. supply

Volts	24	42	48	110	115	220	230	240	380	400	415	440	500
-------	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

LC2 DT20...DT40, LC1 DT60...DT80

50/60 Hz	B7	D7	E7	F7	FE7	M7	P7	U7	Q7	V7	N7	R7	-
----------	----	----	----	----	-----	----	----	----	----	----	----	----	---

LC2 D80004...D115004

50 Hz	B5	D5	E5	F5	FE5	M5	P5	U5	Q5	V5	N5	R5	S5
-------	----	----	----	----	-----	----	----	----	----	----	----	----	----

d.c. supply

Volts	12	24	36	48	60	72	110	125	220	250	440
-------	----	----	----	----	----	----	-----	-----	-----	-----	-----

LC2 DT20...DT40, LC1 DT60...DT80 (coils with integral suppression device fitted as standard)

U 0.7...1.25 Uc	JD	BD	CD	ED	ND	SD	FD	GD	MD	UD	RD
-----------------	----	----	----	----	----	----	----	----	----	----	----

Low consumption

Volts	5	12	20	24	48	110	220	250
-------	---	----	----	----	----	-----	-----	-----

LC2 DT20...DT40 (coils with integral suppression device fitted as standard)

U 0.8...1.25 Uc	AL	JL	ZL	BL	EL	FL	ML	UL
-----------------	----	----	----	----	----	----	----	----

For other voltages between 5 and 690 V, see pages 5/86 to 5/91

(2) Clip-on mounting on 35 mm L-shaped rail **AM1 DP** or screw fixing.

(3) BTR screws: hexagon socket head. In accordance with local electrical wiring regulations, a size 4 insulated Allen key must be used (reference **LAD ALLEN4**, see page 5/85).


(4) For these operational currents, order 2 identical contactors and a mechanical interlock **LAD 4CM** (see page 5/76).

References

TeSys contactors


Component parts for assembling reversing contactors for motor control, low-speed/high-speed starters and star-delta starters

537729



LAD 9R1


537730



LAD 9R3

5

537731



LA9 D8069

For 3-pole reversing contactors for motor control

Contactors with screw clamp terminals or connectors. Horizontally mounted, assembled by customer

Description	For contactors (1) (2 identical contactors)	Reference	Weight kg
Kits for assembly of reversing contactors			
Kit comprising:			
■ a mechanical interlock LAD 9V2 with electrical interlocking LAD 9V1 .	LC1 D09 to D38	LAD 9R1V	0.045
■ a set of power connections LAD 9V5 (parallel) and LAD 9V6 (reversing)			
Kit comprising:			
■ a mechanical interlock LAD 9V2 without electrical interlocking	LC1 D09 to D38	LAD 9R1	0.045
■ a set of power connections LAD 9V5 (parallel) and LAD 9V6 (reversing)			
Kit comprising:			
■ a mechanical interlock LAD 4CM .	LC1 D40A to D65A	LAD 9R3	0.170
■ a set of power connections LA9 D65A69 .			
Mechanical interlocks			
Mechanical interlock with integral electrical interlocking	LC1 D80 and D95 (~)	LA9 D4002	0.170
	LC1 D80 and D95 (--)	LA9 D8002	0.170
	LC1 D115 and D150	LA9 D11502	0.290
Mechanical interlock without integral electrical interlocking	LC1 D09 to D38	LAD 9V2	0.040
	LC1 D40A to D65A	LAD 4CM	0.040
	LC1 D80 and D95 (~)	LA9 D50978	0.170
	LC1 D80 and D95 (--)	LA9 D80978	0.170
Sets of power connections			
Comprising:	LC1 D09 to D38 with screw clamp terminals or connectors	LAD 9V5 + LAD 9V6	-
■ a set of parallel bars,	LC1 D09...D32 with spring terminal connections	LAD 9V12 + LAD 9V13 (2)	-
■ a set of reverser bars.	LC1 D40A to D65A	LA9 D65A69	0.130
	LC1 D80 and D95 (~)	LA9 D8069	0.490
	LC1 D80 and D95 (--)	LA9 D8069	0.490
	LC1 D115 and D150	LA9 D11569	1.450

For low-speed/high-speed starter

Description	For contactors with connection type	Reference	Weight kg
Connection kit enabling reversing of low and high speed directions using a reversing contactor and a 2N/O + 2N/C main pole contactor	Screw clamps or connectors	LAD 9PVG	0.016
	Power connection module with spring terminal connections	LAD 3PVG	0.034
	Outgoing terminal block with spring terminal connections	LAD 3PVG10	0.034

For star-delta starter

Description	For contactors	Reference	Weight kg
Mounting kit comprising:	LC1 D09 and D12	LAD 91217	0.180
■ 1 time delay contact block LAD S2 (LC1 D09...D80),	LC1 D18 to D32	LAD 93217	0.310
■ power circuit connections (LC1 D09...D80),	LC1 D40A and D50A	LAD 9SD3	0.380
■ hardware required for fixing the contactors onto the mounting plate (LC1 D80).	LC1 D80	LA9 D8017	0.680
Equipment mounting plates	LC1 D09, D12 and D18	LA9 D12974	0.150
	LC1 D32	LA9 D32974	0.180
	LC1 D40A and D50A	-	-
	LC1 D80	LA9 D80973	0.300

(1) To order the 2 contactors: see pages 5/65 and 5/72.

(2) To assemble a reversing contactor with spring terminal connections, the following components must be ordered:

- 1 mechanical interlock **LAD 9V2**,

- 1 upstream power connection kit and 1 downstream power connection kit.

Upstream power connection kit **LAD 9V10**: installed in the Quickfit system with power connection module **LAD 34**.

(If module **LAD 34** is not used, replace **LAD 9V10** with **LAD 9V12**).

Downstream power connection kit **LAD 9V11**: installed in the Quickfit system with outgoing terminal block **LAD 331**.

(If **LAD 331** is not used, replace **LAD 9V11** with **LAD 9V13**).

Selection :
pages 5/194 to 5/197

Characteristics :
pages 5/50 to 5/55

Dimensions, Schemes :
pages 5/98 and 5/99

5/76

Schneider
Electric

References


TeSys contactors

Component parts for assembling
changeover contactor pairs


For 4-pole changeover contactor pairs (3-phase distribution + neutral)

Contactors with screw clamp terminals or connectors. Horizontally mounted, assembled by customer.


Description	For contactors (1) (2 identical contactors)	Reference	Weight kg
Kits for assembly of changeover contactor pairs			
Kit comprising:			
■ a mechanical interlock LAD 9V2 with electrical interlocking LAD 9V1 , ■ a set of power connections (changeover) LAD 9V7 .	LC1 DT20 to DT40 with screw clamps or connectors	LAD T9R1V	0.045
Kit comprising:			
■ a mechanical interlock LAD 9V2 without electrical interlocking, ■ a set of power connections (changeover) LAD 9V7 .	LC1 DT20 to DT40 with screw clamps or connectors	LAD T9R1	0.045
Mechanical interlocks			
With integral electrical interlocking	LC1 D80004 LP1 D80004 LC1 D115004	LA9 D4002 LA9 D8002 LA9 D11502	0.170 0.170 0.280
Without integral electrical interlocking	LC1 DT20 to DT40 with screw clamps or connectors LC1 DT203 to DT403 with spring terminals LC1 DT60A and DT80A LC1 D80004 LP1 D80004	LAD 9V2 (2) LAD 9V2 (2) LAD 4CM LA9 D50978 LA9 D80978	0.040 0.040 0.040 0.155 0.180
Sets of power connections			
Comprising a set of parallel bars	LC1 DT60A and DT80A LC1 D80004 LP1 D80004 LC1 D115004 LC1 DT203 to DT403 with spring terminals LC1 D80004 LP1 D80004	LA9 D65A70 ▲ LA9 D8070 LA9 D8070 LA9 D11570 LAD 9V9 LA9 D8070 (2) LA9 D8070 (2)	0.150 0.280 0.280 1.100 0.100 — —



LA9 D50978



LA9 D6570



LA9 D8070

For 3-pole changeover contactor pairs

Contactors with screw clamp terminals or connectors. Horizontally mounted, assembled by customer.


Description	For contactors (1) (2 identical contactors)	Reference	Weight kg
Mechanical interlocks			
Without integral electrical interlocking	LC1 D40A...D65A	LAD 9R3S	0.105
With integral electrical interlocking	LC1 D115 and D150	LA9 D11502	0.280
Sets of power connections			
Comprising a set of parallel bars,	LC1 D115 and D150	LA9 D11571	0.960

(1) To order the 2 contactors: see pages 5/65 and 5/72.

(2) Order 2 contact blocks **LAD №1** to build the electrical interlock, see page 5/79.

▲ Available 1st quarter 2010.

LAD 8N

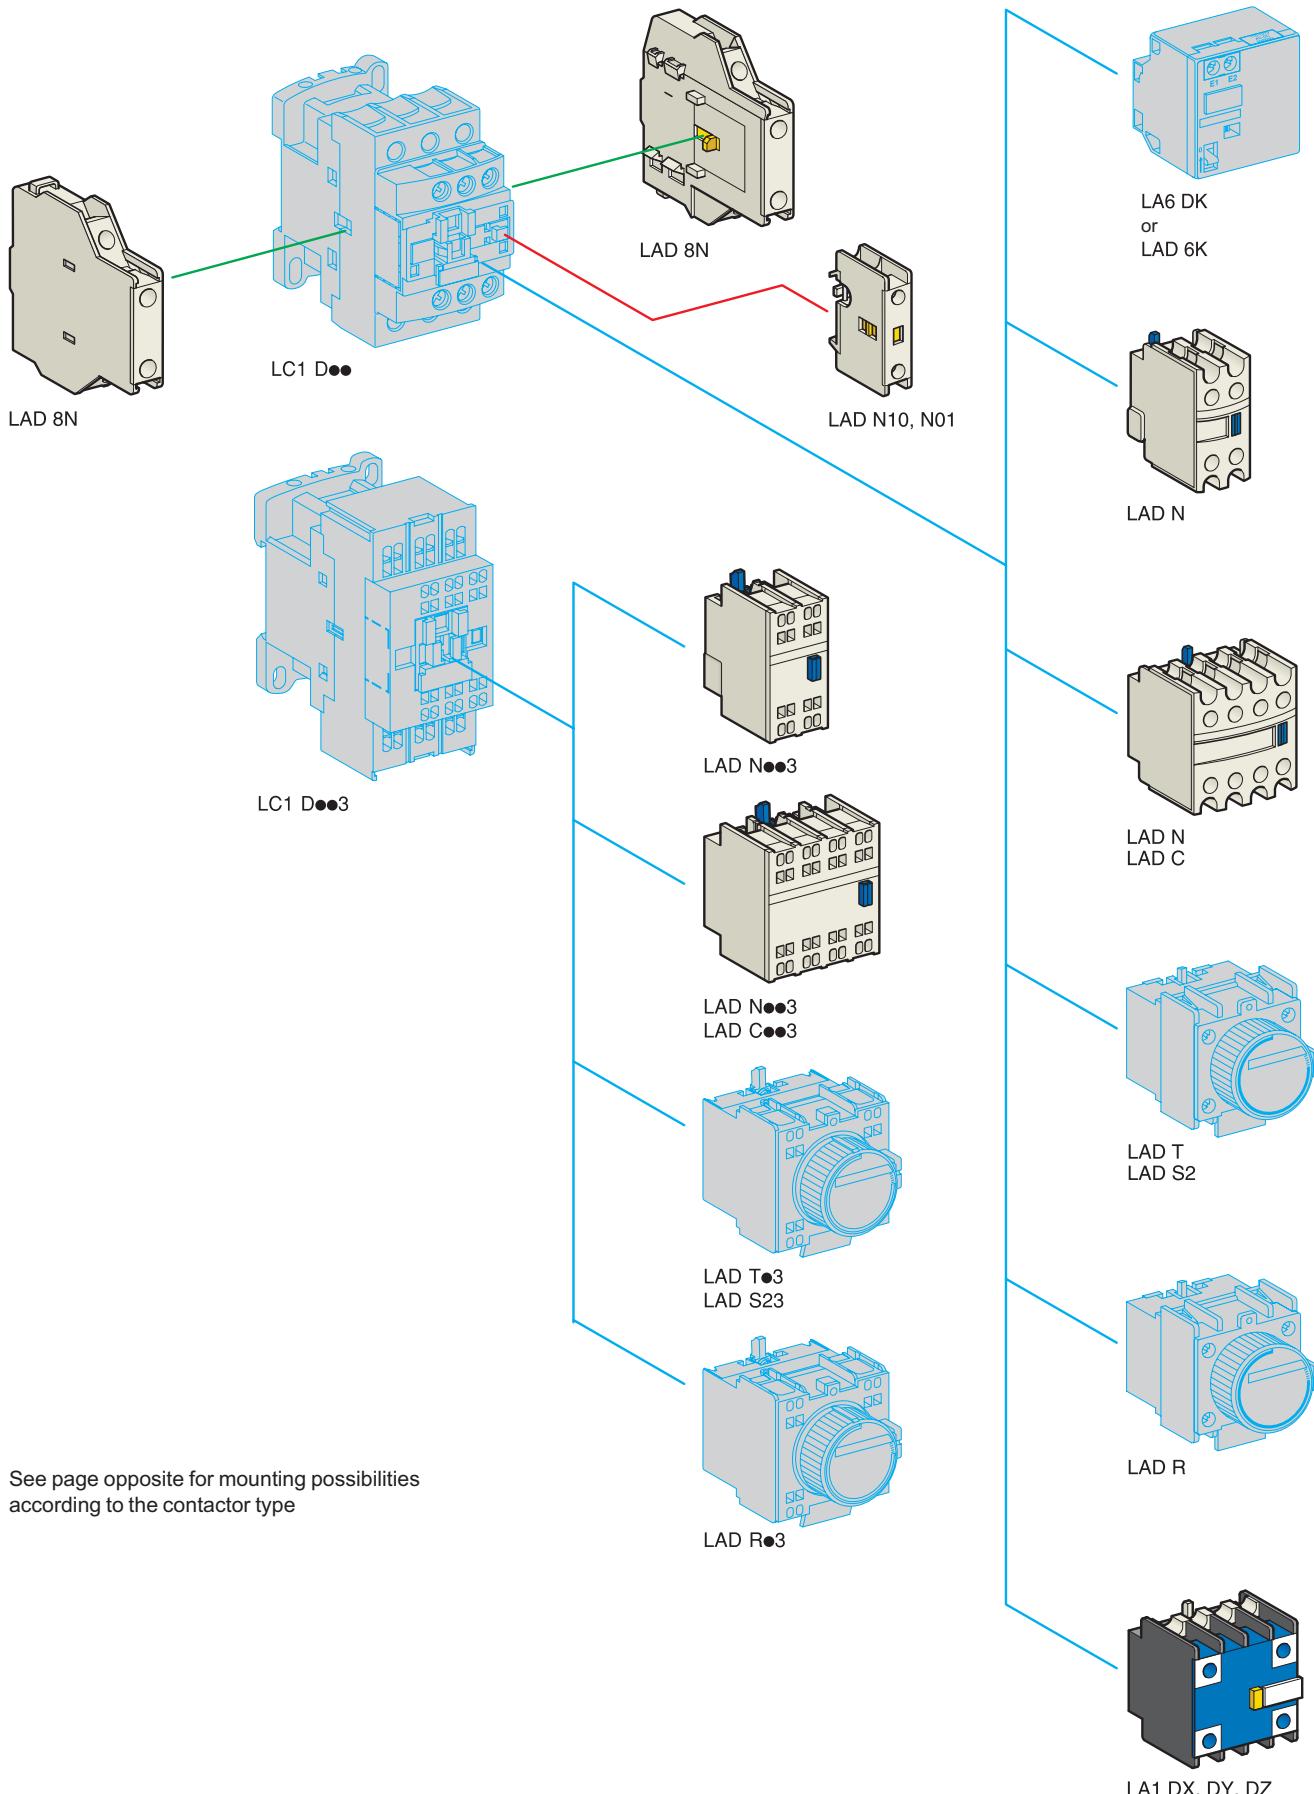

5

See page opposite for mounting possibilities according to the contactor type

References

TeSys contactors

TeSys D contactors and reversing contactors
Instantaneous auxiliary contact blocks

Instantaneous auxiliary contact blocks for connection by screw clamp terminals

For use in normal operating environments

In order to mount an LAD 8N on an LC1 D80 to D95, a set of shims must be ordered separately, see page 5/85

Clip-on mounting (1)	Number of contacts per block	Composition	Reference	Weight kg
Front	1	- - - 1 -	LAD N10	0.020
		- - - - 1	LAD N01	0.020
	2	- - - 1 1	LAD N11	0.030
		- - - 2 -	LAD N20	0.030
	4	- - - 2 2	LAD N22	0.050
		- - - 1 3	LAD N13	0.050
		- - - 4 -	LAD N40	0.050
		- - - - 4	LAD N04	0.050
		- - - 3 1	LAD N31	0.050
	4 incl. 1 N/O & 1 N/C make before break	- - - 2 2	LAD C22	0.050
Side	2	- - - 1 1	LAD 8N11	0.030
		- - - 2 -	LAD 8N20	0.030
		- - - - 2	LAD 8N02	0.030

For terminal referencing conforming to EN 50012

Front on 3P contactors and 4P contactors 20 to 80 A	2	- - - 1 1	LAD N11G	0.030
	4	- - - 2 2	LAD N22G	0.050
Front on 4P contactors 125 to 200 A	2	- - - 1 1	LAD N11P	0.030
	4	- - - 2 2	LAD N22P	0.050

With dust and damp protected contacts, for use in particularly harsh industrial environments

Front	2	- 2 - -	LA1 DX20	0.040
		1 1 - -	LA1 DX11	0.040
		2 - - -	LA1 DX02	0.040
	4	- 2 2 - -	LA1 DY20 (2)	0.040
		- 2 - 2 -	LA1 DZ40	0.050
		- 2 - 1 1	LA1 DZ31	0.060

Instantaneous auxiliary contact blocks for connection by lugs

This type of connection is not possible for blocks with 1 contact or blocks with dust and damp protected contacts.
For all other instantaneous auxiliary contact blocks, add the figure 6 to the end of the references selected above.
Example: LAD N11 becomes LAD N116.

Instantaneous auxiliary contact blocks for connection by spring terminals

This type of connection is not possible for LAD 8, LAD N with 1 contact or blocks with dust and damp protected contacts. For all other contact blocks, add the figure 3 to the end of the references selected above.
Example: LAD N11 becomes LAD N113.

Instantaneous auxiliary contact blocks for connection by Faston connectors

This type of connection is not possible for LAD 8, LAD N with 1 contact or blocks with dust and damp protected contacts. For all other contact blocks, add the figure 9 to the end of the references selected above.
Example: LAD N11 becomes LAD N119.


(1) Maximum number of auxiliary contacts that can be fitted:

Contactors	Type	Number of poles and size	Instantaneous auxiliary contacts			Time delay Front mounted
			Side mounted	Front mounted		
				1 contact	2 contacts	4 contacts
~	3P	LC1 D09...D38	1 on LH side	and -	1	or 1
		LC1 D40A...D65A	1 on LH or 1 on RH side	and -	1	or 1
		LC1 D80 and D95 (50/60 Hz)	1 on each side	or 2	and 1	or 1
		LC1 D80 and D95 (50 or 60 Hz)	1 on each side	and 2	and 1	or 1
	4P	LC1 D115 and D150	1 on LH side	and -	1	or 1
---	4P	LC1 DT20...DT40	1 on LH side	and -	1	or 1
		LC1 DT60A and DT80A	1 on LH or 1 on RH side	and -	1	or 1
		LC1 D40008, D65008 and D80	1 on each side	or 1	or 1	or 1
		LC1 D115	1 on each side	and 1	or 1	or 1
	3P	LC1 D09...D38	-	-	1	or 1
---	4P	LC1 D40A...D65A	-	-	1	or 1
		LC1 D80 and D95	-	1	or 1	or 1
		LC1 D115 and D150	1 on LH side	and -	1	or 1
		LC1 DT20...DT40	-	-	1	or 1
	3P	LC1 D09...D38	-	-	1	-
BC (3)	4P	LC1 DT20...DT40	-	-	1	-


(2) Device fitted with 4 earth screen continuity terminals.

(3) LC: low consumption.


References



LAD T₀



LAD T₀3



LAD 6K10_•

5

TeSys contactors

TeSys D contactors and reversing contactors
Time delay auxiliary contact blocks
Mechanical latch blocks

Time delay auxiliary contact blocks for connection by screw clamp terminals

Maximum number of auxiliary contact blocks that can be fitted per contactor, see page 5/79.

Sealing cover to be ordered separately, see page 5/85.

LAD T0 and LAD R0: with extended scale from 0.1 to 0.6 s.

LAD S2: with switching time of 40 ms ± 15 ms between opening of the N/C contact and closing of the N/O contact.

Clip-on mounting	Number of contacts	Time delay		Reference	Weight kg
		Type	Setting range		
Front	1 N/O + 1 N/C	On-delay	0.1...3 s	LAD T0	0.060
			0.1...30 s	LAD T2	0.060
			10...180 s	LAD T4	0.060
			1...30 s	LAD S2	0.060
			0.1...3 s	LAD R0	0.060
		Off-delay	0.1...30 s	LAD R2	0.060
			10...180 s	LAD R4	0.060

Time delay auxiliary contact blocks for connection by lugs

Add the figure 6 to the end of the references selected above. Example: LAD T0 becomes LAD T06.

Time delay auxiliary contact blocks for connection by spring terminals

Add the figure 3 to the end of the references selected above. Example: LAD T0 becomes LAD T03

Time delay auxiliary contact blocks for connection by Faston connectors

Add the figure 9 to the end of the references selected above. Example: LAD T0 becomes LAD T09.

Mechanical latch blocks (1)

Clip-on mounting	Unlatching control	For use on contactor	Basic reference, to be completed by adding the control voltage code (2)	Weight kg
Front	Manual or electric	LC1 D09...D38 (~ or ---) LC1 DT20...DT40 (~ or ---)	LAD 6K10 _•	0.070
		LC1 D40A...D65A (3 P ~ or ---) LC1 DT60A and DT80A (4 P ~ or ---)	LAD 6K10 _•	0.070
		LC1 D80...D150 (3 P ~) LC1 D80 and D115 (3 P ---) LC1 D80 (4 P ~) LC1 D80 and D115 (4 P ~) LP1 D80 and LC1 D115 (4 P ---)	LA6 DK20 _•	0.090

(1) The mechanical latch block must not be powered up at the same time as the contactor.

The duration of the control signal for the mechanical latch block and the contactor should be:

≥ 100 ms for a contactor operating on an a.c. supply,

≥ 250 ms for a contactor operating on a d.c. supply.

Maximum impulse duration for the LAD 6K10_• mechanical latch block: 10 seconds.

(2) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office).

Volts 50/60 Hz, ---	24	32/36	42/48	60/72	100	110/127	220/240	256/277	380/415
Code	B	C	E	EN	K	F	M	U	Q

Characteristics:
pages 5/56 to 5/58

Dimensions:
pages 5/92 to 5/95

Schemes:
pages 5/96 and 5/97


5/80

Schneider
Electric


References

TeSys contactors


TeSys D contactors and reversing contactors
Suppressor modules




LAD 4•



LAD 4RC3•, LAD 4V3•,
LAD 4D3U, LAD 4T3•



LA4 D•



LAD 4DDL or LAD 4T•DL

RC circuits (Resistor-Capacitor)

Effective protection for circuits highly sensitive to "high frequency" interference. For use only in cases where the voltage is virtually sinusoidal, i.e. less than 5% total harmonic distortion. Voltage limited to 3 Uc max. and oscillating frequency limited to 400 Hz max. Slight increase in drop-out time (1.2 to 2 times the normal time).

Mounting	For use with contactor (1)	Type		Reference	Weight
		V~	V---		
Clip-on side mounting (3)	D09...D38 (3P)	24...48	—	LAD 4RCE	0.012
	DT20...DT40	50...127	—	LAD 4RCG	0.012
		110...250	—	LAD 4RCU	0.012
Clip-on front mounting (3)	D40A...D65A (3P)	24...48	—	LAD 4RC3E	0.020
	DT60A...DT80A (4P)	50...127	—	LAD 4RC3G	0.020
		110...240	—	LAD 4RC3U	0.020
		380...415	—	LAD 4RC3N	0.040
Screw fixing (4)	D80...D150 (3P)	24...48	—	LA4 DA2E	0.018
	D40...D115 (4P)	50...127	—	LA4 DA2G	0.018
		110...240	—	LA4 DA2U	0.018
		380...415	—	LA4 DA2N	0.018

Varistors (peak limiting)

Protection provided by limiting the transient voltage to 2 Uc max. Maximum reduction of transient voltage peaks. Slight increase in drop-out time (1.1 to 1.5 times the normal time).

Clip-on side mounting (3)	D09...D38 (3P) DT20...DT40	24...48	—	LAD 4VE	0.012
		50...127	—	LAD 4VG	0.012
		110...250	—	LAD 4VU	0.012
Clip-on front mounting (3)	D40A...D65A (3P) DT60A...DT80A (4P)	24...48	24...48	LAD 4V3E	0.020
		50...127	50...127	LAD 4V3G	0.020
		110...250	110...250	LAD 4V3U	0.020
Screw fixing (4)	D80...D115 (3P)	24...48	—	LA4 DE2E	0.018
	D80...D115 (4P)	50...127	—	LA4 DE2G	0.018
		110...250	—	LA4 DE2U	0.018
	D80...D95 (3P)	—	24...48	LA4 DE3E	0.018
	D80 (4P)	—	50...127	LA4 DE3G	0.018
		—	110...250	LA4 DE3U	0.018

Flywheel diodes

No overvoltage or oscillating frequency. Increase in drop-out time (6 to 10 times the normal time). Polarised component.

Clip-on side mounting (5)	D09...D38 (3P), DT20...DT40	—	24...250	LAD 4DDL	0.012
Clip-on front mounting (5)	D40A...D65A (3P), DT60A...DT80A (4P)	—	24...250	LAD 4D3U	0.020
Screw fixing (4)	D80 and D95 (3P), D40...D80 (4P)	—	24...250	LA4 DC3U	0.018

Bidirectional peak limiting diodes

Protection provided by limiting the transient voltage to 2 Uc max. Maximum reduction of transient voltage peaks.

Clip-on side mounting (3) (5)	D09...D38 (3P) DT20...DT40 (4P) (2)	24	—	LAD 4TB	0.012
		—	24	LAD 4TBDL	0.012
		72	—	LAD 4TS	0.012
		—	72	LAD 4TSDL	0.012
		—	125	LAD 4TGDL	0.012
		—	250	LAD 4TUDL	0.012
		—	600	LAD 4TXDL	0.012
Clip-on front mounting (3)	D40A...D65A (3P) DT60A...DT80A (4P) (2)	12...24	12...24	LAD 4T3B	0.020
		25...72	25...72	LAD 4T3S	0.020
		73...125	73...125	LAD 4T3G	0.020
		126...250	126...250	LAD 4T3U	0.020
Screw fixing (4)	D80...D95 (3P)	251...440	251...440	LAD 4T3R	0.020
	D40...D80 (4P)	12...24	12...24	LA4 DB2B	0.018
		25...72	25...72	LA4 DB2S	0.018
		—	24	LA4 DB3B	0.018
		—	72	LA4 DB3S	0.018


(1) For satisfactory protection, a suppressor module must be fitted across the coil of each contactor.

(2) From D09 to D65A and from LC1 DT20 to DT80A, d.c. and low consumption 3-pole contactors are fitted with a built-in bidirectional peak limiting diode suppressor as standard. This bidirectional peak limiting diode is removable and can therefore be replaced by the user. (See reference above). If a d.c. or low consumption contactor is used without suppression, the standard suppressor should be replaced with a blanking plug (reference **LAD 9DL** for LC1 D09 to D38 and LC1 DT20 to DT40; reference **LAD 9DL3** for LC1 D40A to D65A and LC1 DT60A to DT80A).

(3) Clipping-on makes the electrical connection. The overall size of the contactor remains unchanged.

(4) Mounting at the top of the contactor on coil terminals A1 and A2.

(5) In order to install these accessories, the existing suppression device must first be removed.

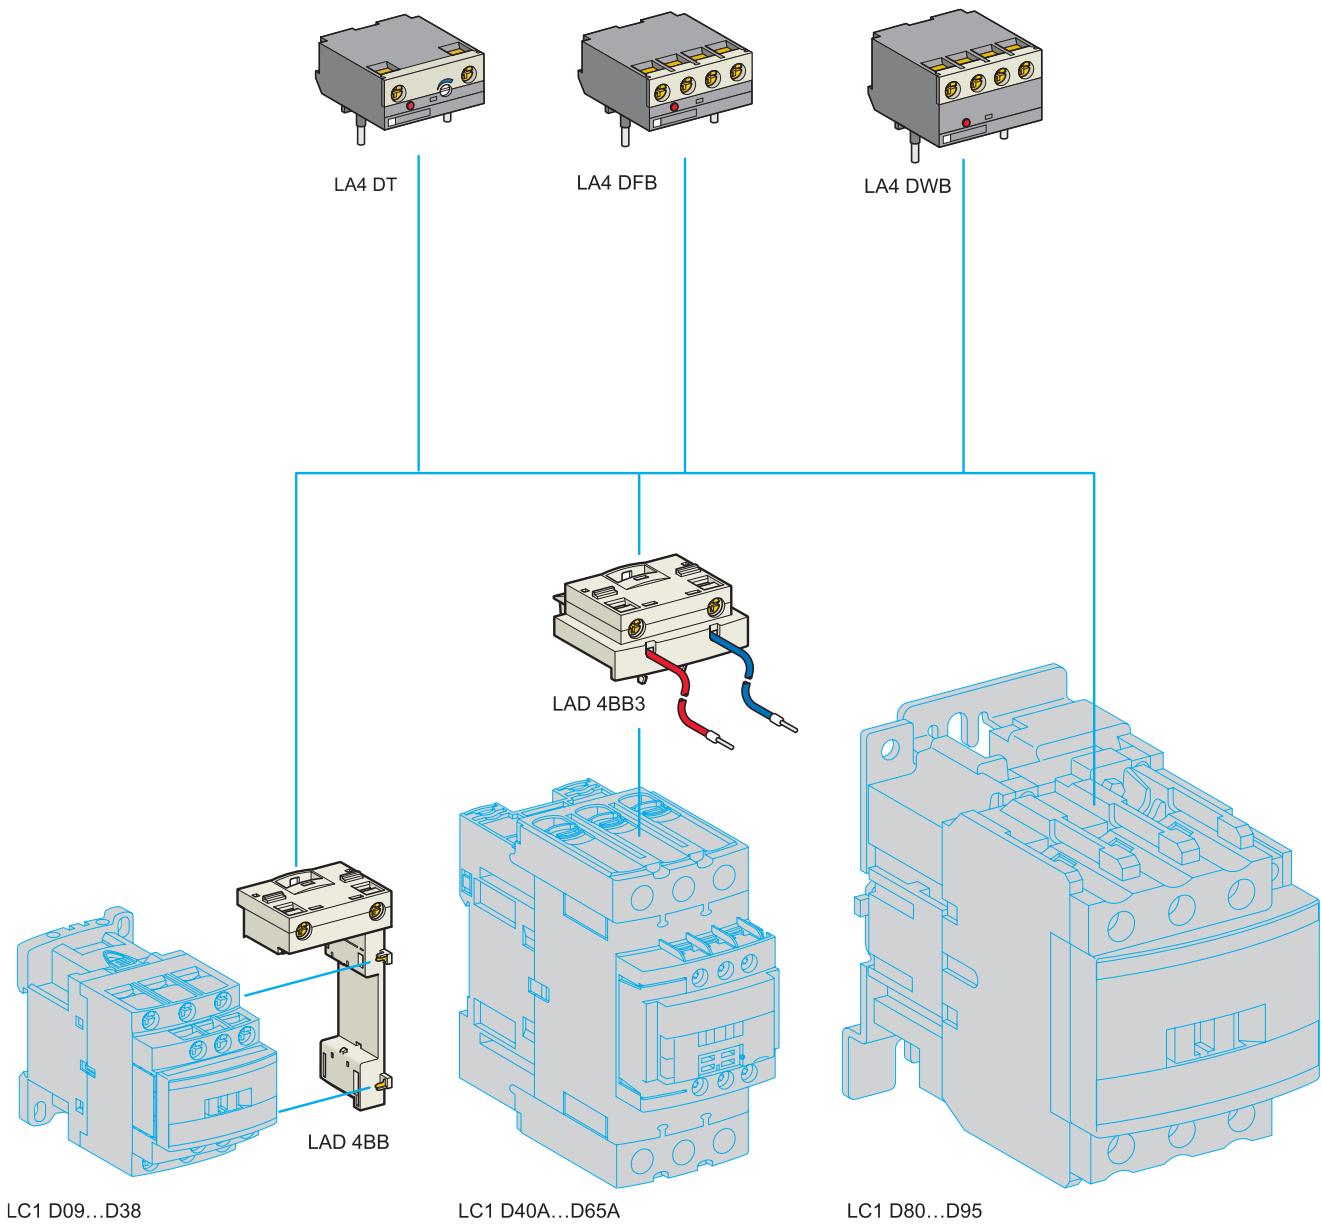

See page opposite for mounting possibilities
according to the contactor type

References

TeSys contactors

TeSys D contactors and reversing contactors
Accessories

Electronic serial timer modules (1)

- 3-pole contactors LC1 D09 to D38:
mounted using adapter LAD 4BB, to be ordered separately, see below.
- 3-pole contactors LC1 D40A to D65A:
mounted using adapter LAD 4BB3, to be ordered separately, see below.
- 3-pole contactors LC1 D80 to D150 and 4-pole contactors LC1 D40 to D115:
mounted directly across terminals A1 and A2 of the contactor.

On-delay type		Time delay	Reference	Weight kg
Operational voltage ~	24...250 V	100...250 V		
LC1 D09...D65A (3P)		LC1 D80...D150 (3P)	0.1...2 s	LA4 DT0U 0.040
			1.5...30 s	LA4 DT2U 0.040
			25...500 s	LA4 DT4U 0.040

Interface modules

- 3-pole contactors LC1 D09 to D38: mounted using adapter LAD 4BB, to be ordered separately, see below.
- 3-pole contactors LC1 D40A to D65A: mounted using adapter LAD 4 BB3, to be ordered separately, see below.

Relay interface		Supply voltage E1-E2 (---)	Reference	Weight kg
Operational voltage ~	24...250 V	24 V	LA4 DFB	0.050

Relay interface with "AUTO-I" manual override switch (output forced "ON"), solid state type

Operational voltage ~	Supply voltage E1-E2 (---)	Reference	Weight kg
24...250 V	24 V	LA4 DWB	0.045

Low consumption kit

For use on contactors	Composition	Reference	Weight kg
LC1 D40A...D65A (3P) (2)	Kit comprising: ■ a retrofit coil LAD 4BB3. ■ a relay interface module LA4 DFB.	LA4 DBL	0.077

Retrofit: coil for 3-pole contactor

For adapting existing wiring to a new product

For use on contactors	Reference	Weight kg
LC1 D09...D38	LAD 4BB	0.019
Without coil suppression		
With coil suppression	~ 24...48 V	LAD 4BBVE 0.014
	~ 50...127 V	LAD 4BBVG 0.014
	~ 110...250 V	LAD 4BBVU 0.014
LC1 D40A...65A	Without coil suppression	LAD 4BB3 0.027


(1) For 24 V operation, the contactor must be fitted with a 21 V coil (code Z). See pages 5/86 to 5/91.

(2) The kit is compatible with a coil voltage of ~ 24 V to ~ 250 V (B7 to U7) and --- 24 V to --- 250 V (BD to UD).


References (continued)

TeSys contactors


TeSys D contactors and reversing contactors
Accessories




LA9 D3260




LA9 D11550•




LAD 96570



LA9 D11560•



LA9 D11570•



LA9 D80962



LA9 D11567

Accessories for main pole and control connections						
Description	For use with contactors LC1 ~	For use with contactors LC1 ---	Sold in lots of	Unit reference	Weight kg	
Connectors for cable, size (1 connector)	4-pole 10 mm ²	DT20, DT25	DT20, DT25	1	LAD 92560	0.030
	3-pole 25 mm ²	D09...D38	D09...D38	1	LA9 D3260	0.040
EverLink® terminal block	3-pole	D40A...D65A	D40A...D65A	1	LAD 96560	0.087
Connectors for cables (2 connectors)	3-pole 120 mm ²	D115, D150	D115, D150	1	LA9 D115603	0.560
	4-pole 120 mm ²	D115	D115	1	LA9 D115604	0.740
Connectors for lug type terminals (2 connectors)	3-pole	D1156, D1506	D1156, D1506	1	LA9 D115503	0.300
	4-pole	D1156	D1156	1	LA9 D115504	0.360
Protective covers for connectors for lug type terminals	3-pole	D40A6...D65A6	D40A6...D65A6	1	LAD 96570	0.021
		D1156, D1506	D1156, D1506	1	LA9 D115703 (1)	0.250
	4-pole	D60A6...D80A6	D60A6...D80A6	1	LAD 96580	0.027
		D1156, D1506	D1156, D1506	1	LA9 D115704	0.300
IP 20 covers for lug type terminals (for mounting with circuit-breakers GV3 P●●6 and GV3 L●●6)	3 poles	D40A6...D65A6	D40A6...D65A6	1	LAD 96575	0.010
Links for parallel connection of	2 poles	D09...D38	D09...D38	10	LA9 D2561	0.060
		DT20, DT25 (4P)	DT20, DT25 (4P)	10	LA9 D1261	0.012
		DT32, DT40 (4P)	DT32, DT40 (4P)	10	LAD 96061	0.060
	4 poles	D40A...D65A	D40A...D65A	1	LAD 9P32	0.021
		D80, D95	D80	2	LA9 D80961	0.060
	3 poles	D09...D38	D09...D38	10	LAD 9P3 (2)	0.005
		D40A...D65A	D40A...D65A	1	LAD 9P33	0.021
		D80, D95	D80, D95	1	LA9 D80962	0.080
	4 poles	DT20, DT25	DT20, DT25	2	LA9 D1263	0.024
		D80, D95	D80	2	LA9 D80963	0.100
Staggered coil connection		-	D80	10	LA9 D09966	0.006
Control circuit take-off from main pole		D80, D95	D80, D95	10	LA9 D8067	0.010
		D115, D150	D115, D150	10	LA9 D11567	0.014
Spreaders for increasing the pole pitch to 45 mm		D115, D150	D115, D150	3	GV7 AC03	0.180

(1) For 3-pole contactors: 1 set of 6 covers, for 4-pole contactors: 1 set of 8 covers.
(2) Separate connecting bar for connecting 2 poles in parallel.


Dimensions:
pages 5/92 to 5/95

Schemes:
pages 5/96 and 5/97


References (continued)

TeSys contactors


TeSys D contactors and reversing contactors
Accessories




GV2 G245




GV1 G09



GV3 S



LA9 D941



LAD 9ET•



LAD 7X3

5

Sets of contacts and arc chambers

Description	For contactor	Reference	Weight kg
Sets of contacts	3-pole	LC1 D115	LA5 D1158031
		LC1 D150	LA5 D150803
	4-pole	LC1 D115004	LA5 D115804
Arc chambers	3-pole	LC1 D115	LA5 D11550
		LC1 D150	LA5 D15050
	4-pole	LC1 D115004	LA5 D115450

Power connection accessories

Terminal block	For supply to one or more GV2 G busbar sets	GV1 G09	0.040
Set of 63 A busbars for parallelling of contactors	2 contactors LC1 D09...D18 or D25...D38	GV2 G245	0.036
	4 contactors LC1 D09...D18 or D25...D38	GV2 G445	0.077
Set of 115 A busbars for parallelling of contactors	2 contactors LC1 D40A...D65A	GV3 G264	0.150
	3 contactors LC1 D40A...D65A	GV3 G364 (1)	0.250
Set of S-shape busbars	For circuit-breakers GV3 P•• and GV3 L•• and contactors LC1 D40A...D65A	GV3 S	0.111

Protection accessories

Description	Use	Sold in lots of	Reference	Weight kg
Miniature control circuit fuse holder	5 x 20 with 4 A-250 V fuse	1	LA9 D941	0.025
Sealing cover	For LAD T, LAD R	1	LA9 D901	0.005
Safety cover preventing access to the moving contact carrier	LC1 D09...D65A and DT20...DT80A	1	LAD 9ET1	0.026
	LC1 D80 and D95	1	LAD 9ET3	0.004
	LC1 D115 and D150	1	LAD 9ET4	0.004

Marking accessories

Description	Use	Sold in lots of	Unit reference	Weight kg
Sheet of 64 blank legends, self-adhesive, 8 x 33 mm (2)	Contactors (except 4P) LC1 D80...D115, LAD N (4 contacts), LA6 DK	10	LAD 21	0.020
Sheet of 112 blank legends, self-adhesive, 8 x 12 mm (2)	LAD N (2 contacts), LAD T, LAD R, LRD	10	LAD 22	0.020
Sheet of 64 blank legends for marking using plotter or 8 x 33 mm engraver	Contactors (except 4P) LC1 D80...D115, LAD (4 contacts), LA6 DK	10	LAD 23	0.050
Sheet of 440 blank legends for marking using plotter or 8 x 12 mm engraver	All products	35	LAD 24	0.200
Marker holder snap-in, 8 x 22 mm	4-pole contactors, LC1 D80...D115, LA6 DK	100	LA9 D92	0.001
Marker holder snap-in, 8 x 18 mm	LC1 D09...D65A, LC1 DT20...DT80A, LAD N (4 contacts), LAD T, LAD R	100	LAD 90	0.001
Bag of 300 blank legends self-adhesive, 7 x 21 mm	On holder LA9 D92	1	LA9 D93	0.001
"SIS Label" labelling software supplied on CD-Rom	Multi-language version: English, French, German, Italian, Spanish	1	XBY 2U	0.100

Mounting accessories

Retrofit plate for screw fixing	For replacement of LC1 D40 to D65 with LC1 D40A to D65A	1	LAD 7X3	0.150
Mounting plate	For replacement of LC1 F115 or F150 with LC1 D115 or D150	1	LA9 D730	0.360
Set of shims	For fitting side mounting blocks LAD 8N on LC1 D80 and D95	1	LA9 D511	0.020
Size 4 Allen key, insulated, 1000 V	For use on contactors LC1 D40A to LC1 D150	5	LAD ALLEN4	0.026

(1) With this set of busbars, any one contactor can be supplied directly by its EverLink® double cage power terminal block. The other two contactors are supplied by the busbar set. The 115 A limitation is therefore applied to these two contactors. Example: 1 LC1 D65A supplied directly + 1 contactor LC1 D65A and 1 contactor LC1 D50 A supplied via the busbar set = 115 A. This combination is compatible with busbar set GV3 G364.

(2) These legends are for sticking onto the safety cover of the contactors or add-on block, if fitted.

References

TeSys contactors a.c. coils for TeSys D, 3 or 4-pole contactors

For ~ contactors LC1 D09...D38 and LC1 DT20...DT40

Specifications

Average consumption at 20 °C:

- inrush ($\cos \varphi = 0.75$) 70 VA,
- sealed ($\cos \varphi = 0.3$) 50 Hz: 7 VA, 60 Hz: 7.5 VA

Operating range ($\theta \leq 60^\circ \text{C}$): 50 Hz: 0.8...1.1 Uc, 60 Hz: 0.85...1.1 Uc.


Control circuit voltage Uc	Average resistance at 20 °C $\pm 10\%$	Inductance of closed circuit	Reference (1)	Weight
V	Ω	H		kg
12	1.33	0.05	LXD 1J7	0.070
21 (2)	4.17	0.17	LXD 1Z7	0.070
24	5.37	0.22	LXD 1B7	0.070
32	10.1	0.39	LXD 1C7	0.070
36	12.8	0.49	LXD 1CC7	0.070
42	17	0.67	LXD 1D7	0.070
48	21.7	0.87	LXD 1E7	0.070
60	34.6	1.4	LXD 1EE7	0.070
100	100.4	3.8	LXD 1K7	0.070
110	124.1	4.6	LXD 1F7	0.070
115	129.8	5	LXD 1FE7	0.070
120	150.6	5.4	LXD 1G7	0.070
127	158.5	6.1	LXD 1FC7	0.070
200	410.7	15	LXD 1L7	0.070
208	430.4	16	LXD 1LE7	0.070
220	515.4	18	LXD 1M7 (3)	0.070
230	538.6	20	LXD 1P7	0.070
240	562.3	22	LXD 1U7	0.070
277	800.7	29	LXD 1W7	0.070
380	1551	55	LXD 1Q7 (4)	0.070
400	1633	60	LXD 1V7	0.070
415	1694	65	LXD 1N7	0.070
440	1993	73	LXD 1R7	0.070
480	2398	87	LXD 1T7	0.070
500	2499	95	LXD 1S7	0.070
575	3294	125	LXD 1SC7	0.070
600	3810	136	LXD 1X7	0.070
660	4656	165	LXD 1YC7	0.070
690	5020	180	LXD 1Y7	0.070

(1) The last 2 digits in the reference represent the voltage code.

(2) Voltage for special coils fitted in contactors with serial timer modules, with 24 V supply.

(3) Suitable for use on 230 V / 50 Hz. In this case, apply a coefficient of 0.6 to the mechanical durability of the contactor (see pages 5/52 and 5/53).

(4) Suitable for use on 400 V / 50 Hz. In this case, apply a coefficient of 0.6 to the mechanical durability of the contactor (see pages 5/52 and 5/53).



LXD 1••

References

TeSys contactors a.c. coils for TeSys D, 3 or 4-pole contactors


For ~ contactors LC1 D40A...D65A, LC1 DT60A and LC1 DT80A

Specifications

Average consumption at 20 °C:

- inrush ($\cos \varphi = 0.75$) 160 VA.
- sealed ($\cos \varphi = 0.3$) 50 Hz: 15 VA, 60 Hz: 15 VA

Operating range ($\theta \leq 60^{\circ}\text{C}$): 50 Hz: 0.8...1.1 Uc, 60 Hz: 0.85...1.1 Uc.



LXD 3••

Control circuit voltage Uc V	Average resistance at 20 °C ± 10% Ω	Inductance of closed circuit H	Reference (1)	Weight kg
50/60 Hz				
12	0.49	0.03	LXD 3J5 (2)	0.070
24	1.98	0.12	LXD 3B7	0.070
32	3.76	0.22	LXD 3C7	0.070
42	6.18	0.37	LXD 3D7	0.070
48	7.97	0.48	LXD 3E7	0.070
100	37.63	2.07	LXD 3K7	0.070
110	42.28	2.50	LXD 3F7	0.070
115	48.76	2.74	LXD 3FE7	0.070
120	37.63	2.07	LXD 3G7	0.070
127	60.29	3.34	LXD 3FC7	0.070
200	149	8.27	LXD 3L7	0.070
208	105	6.22	LXD 3LE7	0.070
220	182	10	LXD 3M7 (3)	0.070
230	192	10.9	LXD 3P7	0.070
240	202	11.9	LXD 3U7	0.070
277	193	11	LXD 3W7	0.070
380	512	29.9	LXD 3Q7 (4)	0.070
400	607	33.1	LXD 3V7	0.070
415	635	35.6	LXD 3N7	0.070
440	682	40.1	LXD 3R7	0.070
480	607	33.1	LXD 3T7	0.070
500	878	51.7	LXD 3S7	0.070
575	1238	68.4	LXD 3SC7	0.070
600	1304	74.5	LXD 3X7	0.070
660	1593	90.1	LXD 3YC7	0.070
690	1683	98.5	LXD 3Y7	0.070

(1) The last 2 digits in the reference represent the voltage code.

(2) This coil can only be used on 50 Hz.

(3) Suitable for use on 230 V / 50 Hz. In this case, apply a coefficient of 0.6 to the mechanical durability of the contactor (see pages 5/52 and 5/53).

(4) Suitable for use on 400 V / 50 Hz. In this case, apply a coefficient of 0.6 to the mechanical durability of the contactor (see pages 5/52 and 5/53).

References (continued)

TeSys contactors

a.c. coils
for TeSys D, 3 or 4-pole contactors

For 3 or 4-pole contactors LC1D40, D50, D65, D80, D95

Specifications

Average consumption at 20 °C

- inrush ($\cos \varphi = 0.75$) 50 Hz: 200 VA, 60 Hz: 220 VA
 - sealed ($\cos \varphi = 0.3$) 50 Hz: 20 VA, 60 Hz: 22 VA

Operating range ($\theta \leq 55^{\circ}\text{C}$): 0.85...1.1 U_{cc}

Control circuit voltage Uc	Average resistance at 20°C ± 10 %	Inductance of closed circuit	Reference (1)	Average resistance at 20°C ± 10 %	Inductance of closed circuit	Reference (1)	Weight
V	Ω	H		Ω	H		kg
50 Hz							
24	1.4	0.09	LX1 D6B5	1.05	0.06	LX1 D6B6	0.280
32	2.6	0.16	LX1 D6C5	—	—	—	0.280
42	4.4	0.27	LX1 D6D5	—	—	—	0.280
48	5.5	0.35	LX1 D6E5	4.2	0.23	LX1 D6E6	0.280
110	31	1.9	LX1 D6F5	22	1.2	LX1 D6F6	0.280
115	31	1.9	LX1 D6FE5	—	—	—	0.280
120	—	—	—	28	1.5	LX1 D6G6	0.280
127	41	2.4	LX1 D6G5	—	—	—	0.280
208	—	—	—	86	4.3	LX1 D6L6	0.280
220	—	—	—	98	4.8	LX1 D6M6	0.280
220/230	127	7.5	LX1 D6M5	—	—	—	0.280
230	133	8.1	LX1 D6P5	—	—	—	0.280
240	152	8.7	LX1 D6U5	120	5.7	LX1 D6U6	0.280
256	166	10	LX1 D6W5	—	—	—	0.280
277	—	—	—	157	8	LX1 D6W6	0.280
380	—	—	—	300	14	LX1 D6Q6	0.280
380/400	381	22	LX1 D6Q5	—	—	—	0.280
400	411	25	LX1 D6V5	—	—	—	0.280
415	463	26	LX1 D6N5	—	—	—	0.280
440	513	30	LX1 D6R5	392	19	LX1 D6R6	0.280
480	—	—	—	480	23	LX1 D6T6	0.280
500	668	38	LX1 D6S5	—	—	—	0.280
575	—	—	—	675	33	LX1 D6S6	0.280
600	—	—	—	775	36	LX1 D6X6	0.280
660	1220	67	LX1 D6Y5	—	—	—	0.280

Specifications

Specifications

- Average consumption at 20 °C:

 - inrush ($\cos \varphi = 0.75$) 50/60 Hz: 245 VA at 50 Hz
 - sealed ($\cos \varphi = 0.3$) 50/60 Hz: 26 VA at 50 Hz

- sealed ($\cos \varphi = 0.3$) 50/60 Hz: 26 VA at 50%

						50/60 Hz	
24	—	—	—	—	1.22	0.08	LX1 D6B7
42	—	—	—	—	3.5	0.25	LX1 D6D7
48	—	—	—	—	5	0.32	LX1 D6E7
110	—	—	—	—	26	1.7	LX1 D6F7
115	—	—	—	—	—	—	LX1 D6FE7
120	—	—	—	—	32	2	LX1 D6G7
220/230 (2)	—	—	—	—	102	6.7	LX1 D6M7
230	—	—	—	—	115	7.7	LX1 D6P7
230/240 (3)	—	—	—	—	131	8.3	LX1 D6U7
380/400 (4)	—	—	—	—	310	20	LX1 D6Q7
400	—	—	—	—	349	23	LX1 D6V7
415	—	—	—	—	390	24	LX1 D6N7
440	—	—	—	—	410	27	LX1 D6R7

(1) The last 2 digits in the reference represent the voltage code.

(1) The last 2 digits in the reference represent the voltage code.
(2) For use on 230 V / 50 Hz, apply a coefficient of 0.6 to the mechanical durability of the contactor, see pages 5/52 and 5/53.

(3) This coil can be used on 220/240 V at 50 Hz and on 240 V only at 60 Hz.

(4) For use on **400 V** / 50 Hz, apply a coefficient of 0.6 to the mechanical durability of the contactor, see pages 5/52 and 5/53.

5/88

References (continued)

TeSys contactors

a.c. coils
for TeSys D, 3 or 4-pole contactors

For 3 or 4-pole contactors LC1 D115


Specifications

Average consumption at 20 °C:

- inrush ($\cos \varphi = 0.8$) 50 or 60 Hz: 300 VA,
- sealed ($\cos \varphi = 0.3$) 50 or 60 Hz: 22 VA

Operating range ($0 \leq 55^{\circ}\text{C}$): 0.85...1.1 Uc.

537502

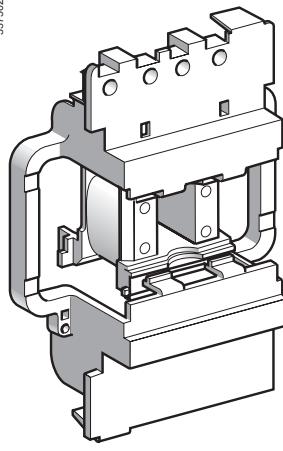

LX1 D8••

Control circuit voltage Uc	Average resistance at 20°C ± 10 %	Inductance of closed circuit	Reference (1)	Average resistance at 20°C ± 10 %	Inductance of closed circuit	Reference (1)	Weight
							kg
50 Hz							
24	1.24	0.09	LX1 D8B5	0.87	0.07	LX1 D8B6	0.260
32	2.14	0.17	LX1 D8C5	—	—	—	0.260
42	3.91	0.28	LX1 D8D5	—	—	—	0.260
48	4.51	0.36	LX1 D8E5	3.91	0.28	LX1 D8E6	0.260
110	26.53	2.00	LX1 D8F5	19.97	1.45	LX1 D8F6	0.260
115	26.53	2.00	LX1 D8FE5	—	—	—	0.260
120	—	—	—	24.02	1.70	LX1 D8G6	0.260
127	32.75	2.44	LX1 D8FC5	—	—	—	0.260
208	—	—	—	67.92	5.06	LX1 D8L6	0.260
220	104.77	7.65	LX1 D8M5	79.61	5.69	LX1 D8M6	0.260
230	104.77	8.29	LX1 D8P5	—	—	—	0.260
240	125.25	8.89	LX1 D8U5	97.04	6.75	LX1 D8U6	0.260
277	—	—	—	125.75	8.89	LX1 D8W6	0.260
380	338.51	22.26	LX1 D8Q5	243.07	17.04	LX1 D8Q6	0.260
400	368.43	25.55	LX1 D8V5	—	—	—	0.260
415	368.43	27.65	LX1 D8N5	—	—	—	0.260
440	441.56	30.34	LX1 D8R5	338.51	22.26	LX1 D8R6	0.260
480	—	—	—	368.43	25.55	LX1 D8T6	0.260
500	566.62	38.12	LX1 D8S5	—	—	—	0.260

For 3 or 4-pole contactors LC1 D115, LC1 D150

Specifications

Average consumption at 20 °C:

- inrush: $\cos \varphi = 0.9$ - 280 to 350 VA,

- sealed: $\cos \varphi = 0.9$ - 2 to 18 VA.

Operating range ($0 \leq 55^{\circ}\text{C}$): 0.8...1.15 Uc.

Coils with integral suppression device fitted as standard, class B.

5

Control circuit voltage Uc	Average resistance at 20°C ± 10 %	Inductance of closed circuit	Reference (1)	Average resistance at 20°C ± 10 %	Inductance of closed circuit	Reference (1)	Weight
							kg
50/60 Hz							
24	—	—	—	147	3.03	LX1 D8B7	0.290
32	—	—	—	301	8.28	LX1 D8C7	0.290
42	—	—	—	498	13.32	LX1 D8D7	0.290
48	—	—	—	1061	24.19	LX1 D8E7	0.290
110	—	—	—	4377	109.69	LX1 D8F7	0.290
115	—	—	—	4377	109.69	LX1 D8FE7	0.290
120	—	—	—	4377	109.69	LX1 D8G7	0.290
127	—	—	—	6586	152.65	LX1 D8FC7	0.290
208	—	—	—	10 895	260.15	LX1 D8LE7	0.290
220	—	—	—	9895	210.72	LX1 D8M7	0.290
230	—	—	—	9895	210.72	LX1 D8P7	0.290
240	—	—	—	9895	210.72	LX1 D8U7	0.290
277	—	—	—	21 988	533.17	LX1 D8UE7	0.290
380	—	—	—	21 011	482.42	LX1 D8Q7	0.290
400	—	—	—	21 011	482.42	LX1 D8V7	0.290
415	—	—	—	21 011	482.42	LX1 D8N7	0.290
440	—	—	—	21 501	507.47	LX1 D8R7	0.290
480	—	—	—	32 249	938.41	LX1 D8T7	0.290
500	—	—	—	32 249	938.41	LX1 D8S7	0.290

(1) The last 2 digits in the reference represent the voltage code.

References

TeSys contactors

d.c. coils
for TeSys D, 3 or 4-pole contactors


For 3-pole contactors LC1 D80 or 4-pole contactors LP1 D80

Specifications

Average consumption: 22 W.
Operating range: 0.85...1.1 Uc.

Control circuit voltage Uc	Average resistance at 20 °C ± 10%	Inductance of closed circuit	Reference (1)	Weight
V	Ω	H		kg
12	6.6	0.46	LX4 D7JD	0.680
24	27	1.89	LX4 D7BD	0.680
36	57	4	LX4 D7CD	0.680
48	107	7.5	LX4 D7ED	0.680
60	170	11.9	LX4 D7ND	0.680
72	230	16.1	LX4 D7SD	0.680
110	564	39.5	LX4 D7FD	0.680
125	718	50.3	LX4 D7GD	0.680
220	2215	155	LX4 D7MD	0.680
250	2850	200	LX4 D7UD	0.680
440	9195	640	LX4 D7RD	0.680

(1) The last 2 digits in the reference represent the voltage code.



LX4 D7•D

References


TeSys contactors d.c. coils for TeSys D, 3 or 4-pole contactors

For contactors LC1 D115, D150

Specifications

Consumption: inrush 270 to 365 W, sealed 2.4 to 5.1 W.
Operating range: 0.75...1.2 Uc.
Coils with integral suppression device fitted as standard, class B.

Control circuit voltage Uc V	Average resistance at 20 °C ± 10 % Ω	Inductance of closed circuit H	Reference (1)	Weight kg
24	147	3.03	LX4 D8BD	0.300
48	1061	24.19	LX4 D8ED	0.300
60	1673	38.44	LX4 D8ND	0.300
72	2500	56.27	LX4 D8SD	0.300
110	4377	109.69	LX4 D8FD	0.300
125	6586	152.65	LX4 D8GD	0.300
220	9895	210.72	LX4 D8MD	0.300
250	18 022	345.40	LX4 D8UD	0.300
440	21 501	684.66	LX4 D8RD	0.300

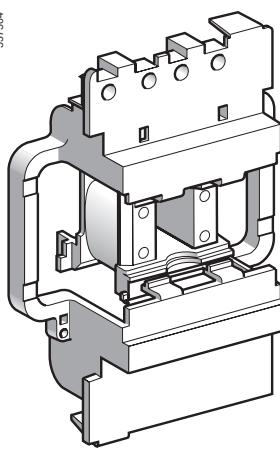

LX4 D8•D

5

For 3-pole contactors LC1 D80 or 4-pole contactors LP1 D80

Specifications

Wide range coils for specific applications
Average consumption: 23 W.
Operating range: 0.75 to 1.2 Uc.
Coils with "TH" treatment as standard.

Control circuit voltage Uc V	Average resistance at 20 °C ± 10 % Ω	Inductance of closed circuit H	Reference (1)	Weight kg
12	6.2	0.49	LX4 D7JW	0.680
24	23.5	1.75	LX4 D7BW	0.680
36	51.9	4.18	LX4 D7CW	0.680
48	94.2	7	LX4 D7EW	0.680
72	204	15.7	LX4 D7SW	0.680
110	483	36	LX4 D7FW	0.680
220	1922	144	LX4 D7MW	0.680


(1) The last 2 digits in the reference represent the voltage code.

Dimensions


TeSys contactors

TeSys D contactors
Control circuit: a.c.

LC1 D09...D18 (3-pole)

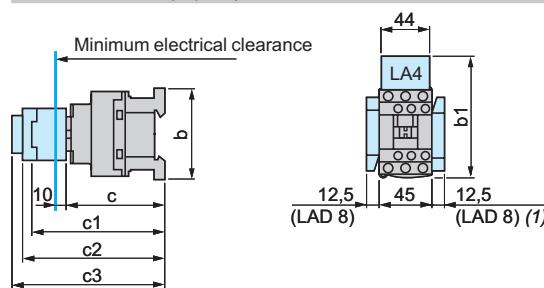

LC1 D25...D38 (3-pole), LC1 DT20...DT40 (4-pole)


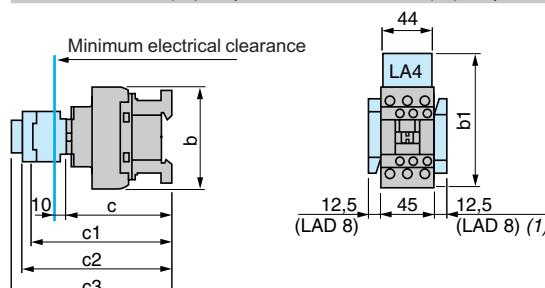


LC1	D09...D18	D093...D123	D099...D129	D25...D38	D183...D323	D098, D128, DT20 and DT25	DT203 and DT253	DT32 and DT40	D188, D258, DT323 and DT403
b without add-on blocks	77	99	80	85	99	85	99	91	105
b1 with LAD 4BB	94	107	95,5	98	107	98	—	—	—
with LA4 D•2	110 (1)	123 (1)	111,5 (1)	114 (1)	123 (1)	114	—	—	—
with LA4 DF, DT	119 (1)	132 (1)	120,5 (1)	123 (1)	132 (1)	129	—	—	—
with LA4 DW, DL	126 (1)	139 (1)	127,5 (1)	130 (1)	139 (1)	190	—	—	—
c without cover or add-on blocks	84	84	84	90	90	90	90	97	97
with cover, without add-on blocks	86	86	86	92	92	92	92	99	99
c1 with LAD N or C (2 or 4 contacts)	117	117	117	123	123	123	123	131	131
c2 with LA6 DK10, LAD 6K10	129	129	129	135	135	135	135	143	143
c3 with LAD T, R, S	137	137	137	143	143	143	143	151	151
with LAD T, R, S and sealing cover	141	141	141	147	147	147	147	155	155

(1) Including LAD 4BB.

LC1 D40A...D65A (3-pole), LC1 DT60A...DT80A (4-pole)


LC1 D80 and D95 (3-pole), LC1 D80004 and D80008 (4-pole), D40008 and D65008 (4-pole)

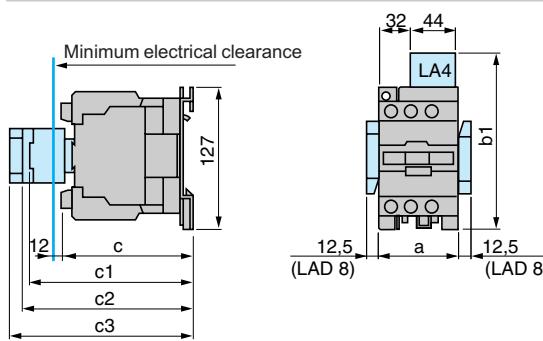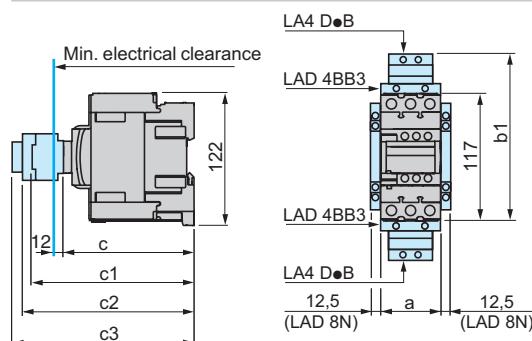

LC1	D40A...D65A	DT60A...DT80A	D40008	D80	D95, D65008	D80004	D80008
a	55	70	85	85	85	96	96
b1 with LA4 D•2	—	—	135	135	135	135	135
with LA4 DB3 or LAD 4BB3	136	—	—	135	—	—	—
with LA4 DF, DT	157	—	142	142	142	142	142
with LA4 DM, DW, DL	166	—	150	150	150	150	150
c without cover or add-on blocks	118	118	125	125	125	125	140
with cover, without add-on blocks	120	120	—	130	130	—	—
c1 with LAD N (1 contact)	—	—	139	150	150	150	150
with LAD N or C (2 or 4 contacts)	150	150	147	158	158	158	158
c2 with LAD 6K10 or LA6 DK	163	163	159	170	170	170	170
c3 with LAD T, R, S	171	171	167	178	178	178	178
with LAD T, R, S and sealing cover	175	175	171	182	182	182	182

LC1 D115 and D150 (3-pole), LC1 D115004 (4-pole)

LC1	D115, D150	D115004	D115004
a	120	150	155
b1 with LA4 DA2	174	174	174
with LA4 DF, DT	185	185	185
with LA4 DM, DL	188	188	188
with LA4 DW	188	188	188
c without cover or add-on blocks	132	132	115
with cover, without add-on blocks	136	—	—
c1 with LAD N or C (2 or 4 contacts)	150	150	150
c2 with LA6 DK20	155	155	155
c3 with LAD T, R, S	168	168	168
with LAD T, R, S and sealing cover	172	172	172

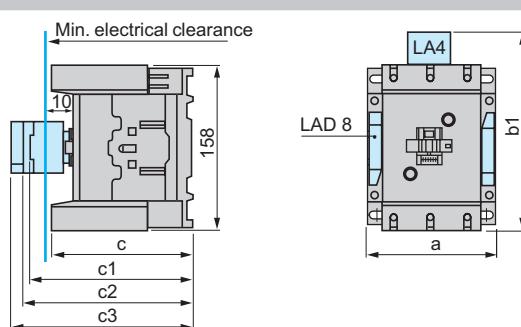


Dimensions

TeSys contactors


TeSys D contactors

Control circuit: d.c. or low consumption

LC1 D09...D18 (3-pole)




LC1 D25...D38 (3-pole)




LC1	D09...D18	D093...D123	D099...D129	D25...D38	D183...D323
b	77	99	80	85	99
c without cover or add-on blocks	93	93	93	99	99
with cover, without add-on blocks	95	95	95	101	101
c1 with LAD N or C (2 or 4 contacts)	126	126	126	132	132
c2 with LA6 DK10	138	138	138	144	144
c3 with LAD T, R, S	146	146	146	152	152
with LAD T, R, S and sealing cover	150	150	150	156	156

LC1 DT20...DT40 (4-pole)




LC1	DT20 and DT25 D098 and D128	DT203 and DT253 D0983 and D1283	DT32 and DT40 D188...D258	DT323 and DT403 D1883 and D2583
b	85	99	91	105
c with cover	99	99	107	107
c1 with LAD N or C (2 or 4 contacts)	123	123	131	131
c2 with LA6 DK10	135	135	143	143
c3 with LAD T, R, S	143	143	151	151
with LAD T, R, S and sealing cover	147	155	155	

LC1 D40A...D65A (3-pole), LC1 DT60A...DT80A (4-pole)

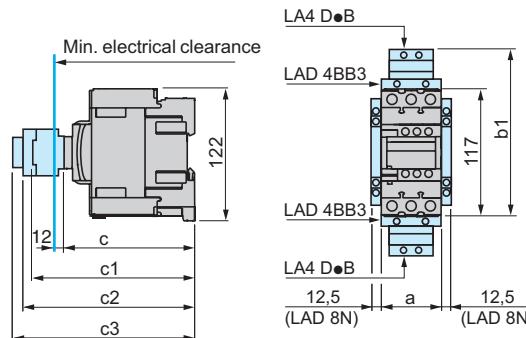

LC1 D80 and D95 (3-pole), LP1 D80004, LP1 D80008 (4-pole), LP1 D40008 and D65008 (4-pole)



	LC1 D40A ... D65A	LC1 DT60A...DT80A	LP1 D40008 and D65008	LC1 D80 and D95	LP1 D80004	LP1 D80008
a	55	70	85	85	96	96
b1 with LAD 4BB3	136	136	—	—	—	—
with LA4 DF, DT	157	157	—	—	—	—
c without cover or add-on blocks	118	118	182	181	181	196
with cover, without add-on blocks	120	120	—	186	—	—
c1 with LAD N (1 contact)	—	—	196	204	204	204
with LAD N or C (2 or 4 contacts)	150	150	202	210	210	210
c2 with LA6 DK10	163	163	213	221	221	221
c3 with LAD T, R, S	171	171	221	229	229	229
with LAD T, R, S and sealing cover	175	175	225	233	233	233

LC1 D115... and LC1 D150... with --- coil: see page 5/92

Schneider
Electric

5/93


Mounting

TeSys contactors

TeSys D contactors

LC1 D09...D38, DT20...DT40

On mounting rail AM1 DP200, DR200 or AM1 DE200 (width 35 mm)

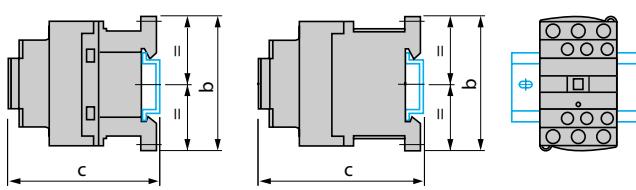

Control circuit: a.c.

LC1	D09... D18	D25... D38	DT20 and DT25	DT32 and DT40
b	77	85	85	100
c (AM1 DP200 or DR200) (1)	88	94	94	109
c (AM1 DE200) (1)	96	102	102	117


Control circuit: d.c.

LC1	D09... D18	D25... D38	DT20 and DT25	DT32 and DT40
b	77	85	94	109
c (AM1 DP200 or DR200) (1)	97	103	103	118
c (AM1 DE200) (1)	105	110	111	1236

(1) with safety cover.


LC1 D80 and D95, LP1 D80

On 2 mounting rails DZ5 MB on 120 mm centres

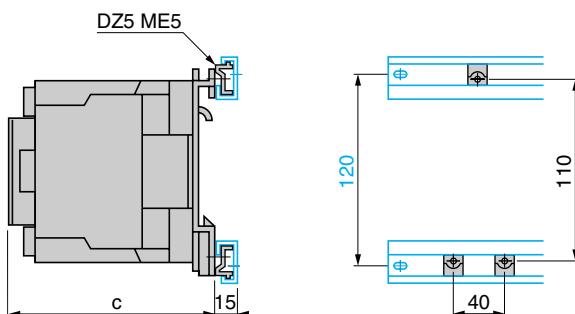

LC1 D115, D150


On 2 mounting rails DZ5 MB on 120 mm centres

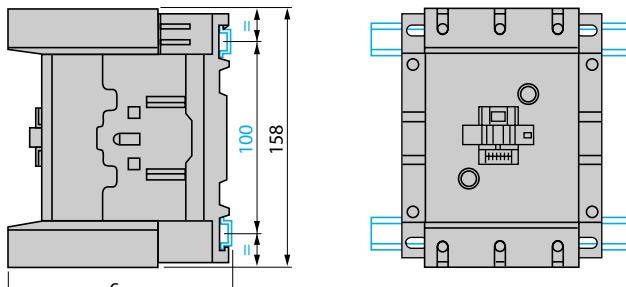

LC1 D40A...D65A, LC1 DT60A and DT80A, LC1 D80 and D95, LC1 D40008 and D65008

On mounting rail AM1 DL200 or DL201 (width 75 mm)

On mounting rail AM1 ED*** or AM1 DE200 (width 35 mm)

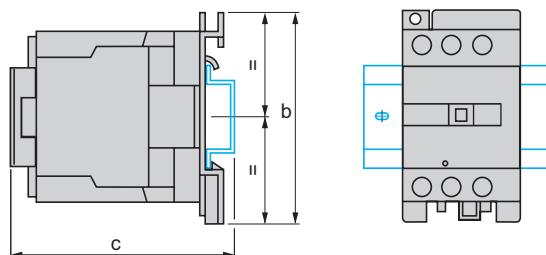

Control circuit: a.c.

LC1	D40A...D65A DT60A...DT80A	D80 and D95	D40008 and D65008
b	122	127	127
c (AM1 DL200) (1)	—	147	143
c (AM1 DL201) (1)	—	137	133
c (AM1 ED*** or DE200) (1)	128	137	133

Control circuit: d.c.

LC1	D40A...D65A DT60A...DT80A	D80 and D95	D40008 and D65008
c (AM1 DL200) (1)	—	205	200
c (AM1 DL201) (1)	—	195	190
c (AM1 ED*** or DE200) (1)	128	128	190

(1) with safety cover.

Control circuit: a.c.

LC1	D80 and D95
c with cover	130

Control circuit: d.c.

LC1	D80 and D95
c with cover	186


LP1	D80
c	181

Mounting (continued)

TeSys contactors
TeSys D contactors


LC1 D09...D38 and LC1 DT20...DT40

On 2 mounting rails DZ5 MB

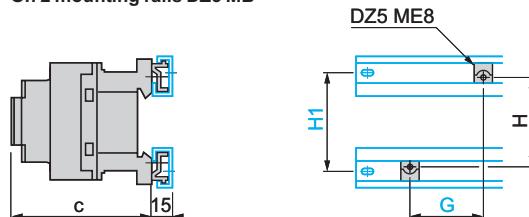

LC1 D09...D38 and LC1 DT20...DT40


On pre-slotted mounting plate AM1 PA, PB, PC

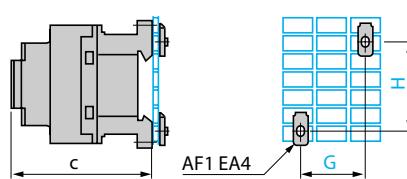

Control circuit:		a.c.	d.c.	a.c.	d.c.	
LC1	D09...D18	D25...D38	D09...D18	D25...D38	D09...D18	D25...D38
c with cover	86	92	95	101	95	101
G	35	35	35	35	35	35
H	60/70	60/70	70	70	70	70
LC1	DT20 and DT25	DT32 and DT40	DT20 and DT25	DT32 and DT40	DT20 and DT25	DT32 and DT40
c with cover	80	93	118	132	101	109
G	35	35	35	35	35	35
H	60	60	70	70	70	70

LC1 D09...D38, LC1 DT20...DT40


Panel mounted

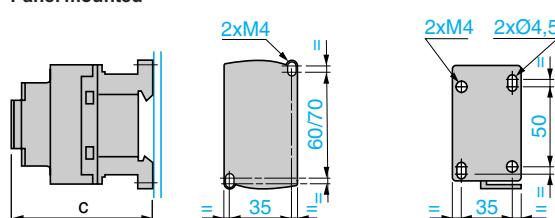

Control circuit:		a.c.	d.c.	a.c.	d.c.	
LC1	D09...D18	D25...D38	D09...D18	D25...D38	D09...D18	D25...D38
c with cover	86	92	95	101	95	101
4-pole contactors						
LC1	DT20 and DT25	DT32 and DT40	DT20 and DT25	DT32 and DT40	DT20 and DT25	DT32 and DT40
c with cover	90	98	90	98	101	109

LC1 D115, D150

Panel mounted

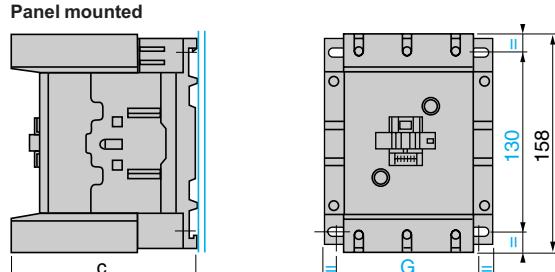

Selection:
pages 5/194 to 5/225

Characteristics:
pages 5/50 to 5/55

References:
pages 5/62 to 5/67

Schemes:
pages 5/96 and 5/97

LC1	D115	D1156	D150	D1506
c	132	115	132	115
G (3-pole)	96/110	96/110	96/110	96/110

LC1	D80 and D95, D40008 and D65008	D80 and D95	D40008 and D65008
c with cover	130	186	186
LP1	—	—	D80

c without cover — — 181

Schemes


TeSys contactors

TeSys D contactors

Contactors

3-pole contactors (References: pages 5/62 to 5/65)

LC1 D09 to D150







4-pole contactors (References: pages 5/66 and 5/67)

LC1 DT20 to DT80A

LC1 D115004

LC1 D098 to D258

LC1 and LP1 D40008 to D80008



Front mounting add-on contact blocks











Instantaneous auxiliary contacts (References: page 5/79)

1 N/O LAD N10 (1)

1 N/C LAD N01 (1)

1 N/O + 1 N/C LAD N11

2 N/O LAD N20



1 N/O + 1 N/C LAD N11G

1 N/O + 1 N/C LAD N11P

2 N/O + 2 N/C LAD N22G





2 N/O + 2 N/C LAD N22P

3 N/O + 1 N/C LAD N31G

3 N/O + 1 N/C LAD N31P

1 N/O + 3 N/C LAD N13G

1 N/O + 3 N/C LAD N13P



(1) Items in brackets refer to blocks mounted on right-hand side of contactor.

Selection :
pages 5/194 to 5/225

Caractéristiques :
pages 5/50 to 5/55

References :
pages 5/62 to 5/83

Dimensions :
pages 5/92 to 5/95

Schemes (continued)

TeSys contactors
TeSys D contactors

Front mounting add-on contact blocks

Dust and damp protected instantaneous auxiliary contacts (References: page 5/79)





2 N/O (24-50 V)
LA1 DX20

2 N/C (24-50 V)
LA1 DX02

2 N/O (5-24 V)
LA1 DY20

2 N/O protected (24-50 V)
2 N/O standard LA1 DZ40

2 N/O protected (24-50 V)
+ 1 N/O + 1 N/C standard LA1 DZ31






Time delay auxiliary contacts (References: page 5/80)

On-delay 1 N/O + 1 N/C LAD T


Off-delay 1 N/O + 1 N/C LAD R

On-delay 1 N/C + 1 N/O break before make LAD S



Mechanical latch blocks (References: page 5/80)

LAD 6K10 and LA6 DK20






Side mounting add-on contact blocks

Instantaneous auxiliary contacts (References: page 5/79)

1 N/O + 1 N/C LAD 8N11 (1)

2 N/O LAD 8N20 (1)


2 N/O LAD 8N02 (1)



(1) Items in brackets refer to blocks mounted on right-hand side of contactor.

Electronic serial timer modules


On-delay LA4 DT•U



Interface modules


Relay output

LA4 DFB



Solid state

LA4 DWB



References: page 5/83.

Selection :
pages 5/194 to 5/225

Characteristics :
pages 5/50 to 5/55

References :
pages 5/62 to 5/83

Dimensions :
pages 5/92 to 5/95

Schneider
Electric


5/97

Dimensions

TeSys contactors TeSys D reversing contactors


LC2 D09 to D38

2 x LC1 D09 to D38

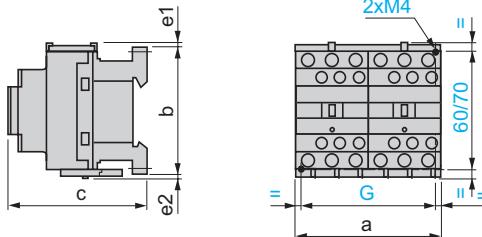

LC2 DT20 to DT40

2 x LC1 DT20 to DT40

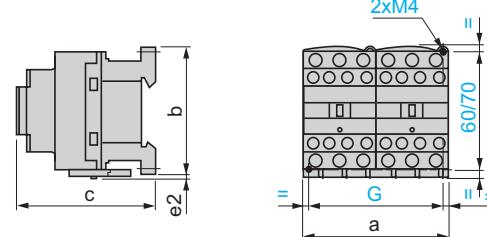

LC2 or 2 x LC1


	a	b	c (1)	e1	e2	G
D09 to D18 ~	90	77	86	4	1.5	80
D093 to D123 ~	90	99	86	—	—	80
D09 to D18 ---	90	77	95	4	1.5	80
D093 to D123 ---	90	99	95	—	—	80
D25 to D38 ~	90	85	92	9	5	80
D183 to D383 ~	90	99	92	—	—	80
D25 to D32 ---	90	85	101	9	5	80
D183 to D383 ---	90	99	101	—	—	80

e1 and e2: including cabling.

(1) With safety cover, without add-on block.

LC2 D40A to D65A

2 x LC1 D40A to D65A

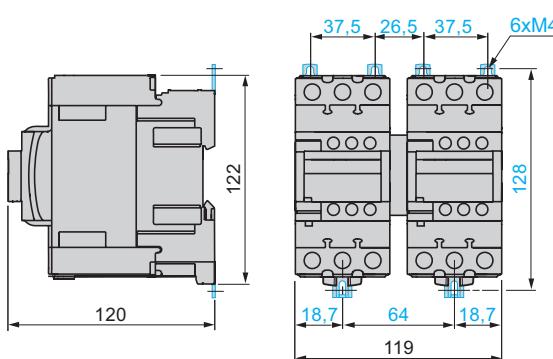


Dimensions (continued)


TeSys contactors
TeSys D reversing contactors

LC2 D80 and D95

2 x LC1 D80 and D95 ~

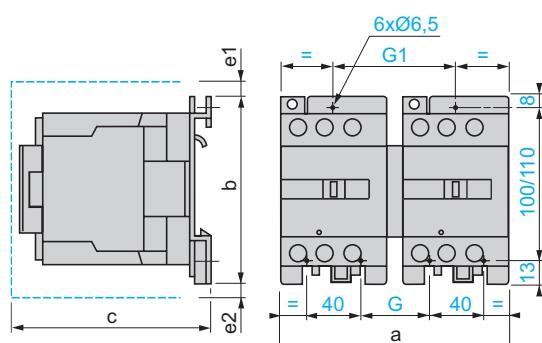

2 x LC1 D80 and D95 ...

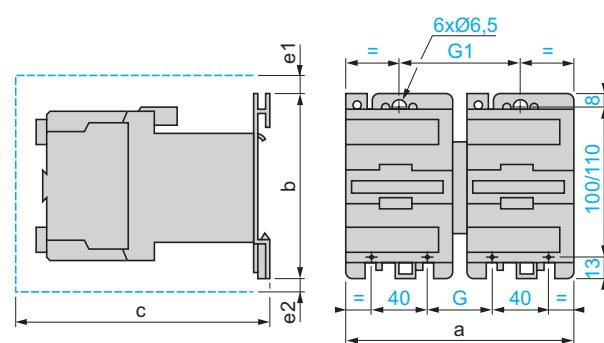

LC2 or 2 x LC1	a	b	c	e1	e2	G	G1
D80 and D95 ~	182	127	158	13	—	57	96
D80004 ~	207	127	158	—	20	71	111


c, e1 and e2: including cabling.

2 x LC1	a	b	c	e1	e2	G	G1
D80 and D95	207	127	215	13	20	96	111

c, e1 and e2: including cabling.

LC2 D115 and D150

2 x LC1 D115 and D150

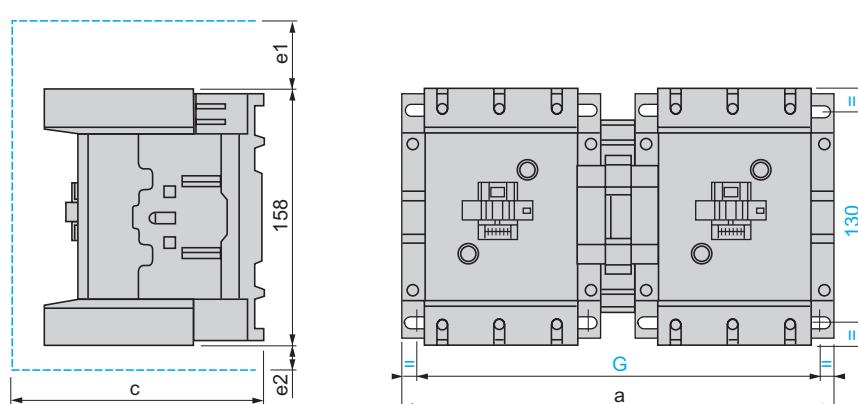

5

LC2 or 2 x LC1	a	c	e1	e2	G
D115 and D150	266	148	56	18	242/256
D115004	334	148	—	60	310/324

c, e1 and e2: including cabling.

Selection:
pages 5/194 to 5/225

Characteristics:
pages 5/50 to 5/55

References:
pages 5/72 to 5/77

Schemes:
pages 5/100 and 5/101

Schneider
Electric

5/99


Schemes

TeSys contactors TeSys D reversing contactors

Reversing contactors for motor control


LC2 D09...D150

Horizontally mounted

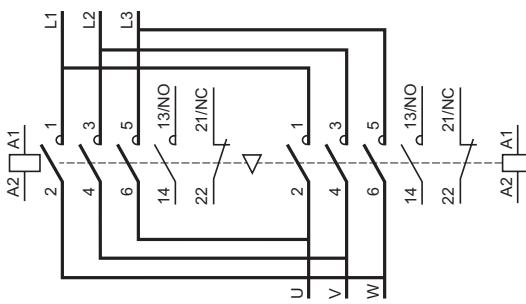

LAD 9R1V


With integral electrical interlocking

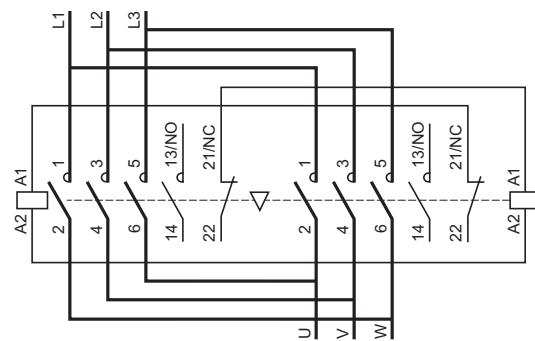

Changeover contactor pairs


LC2 DT20...DT40

Horizontally mounted

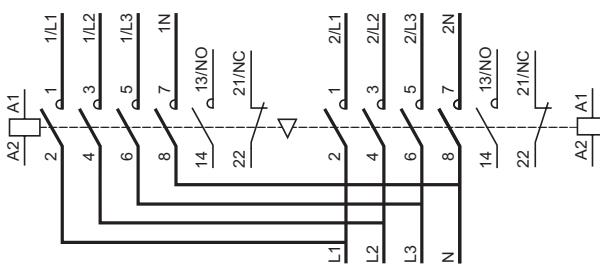

LAD T9R1V

With integral electrical interlocking

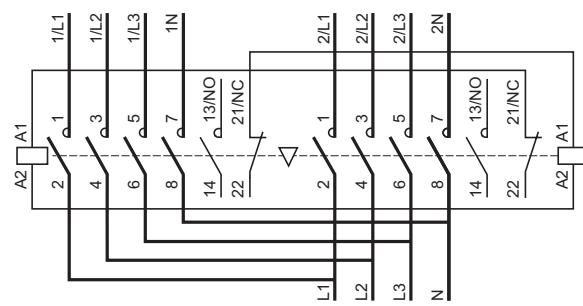


Schemes (continued)

TeSys contactors
TeSys D reversing contactors

Electrical interlocking of reversing contactors fitted with:


Mechanical interlock with integral electrical contacts

LA9 D4002, LA9 D8002 and LA9 D11502




Mechanical interlock without integral electrical contacts


LAD 9V2, LAD 4CM, LA9 D50978 and LA9 D80978



Low speed-High speed cabling kit, screw clamp terminals

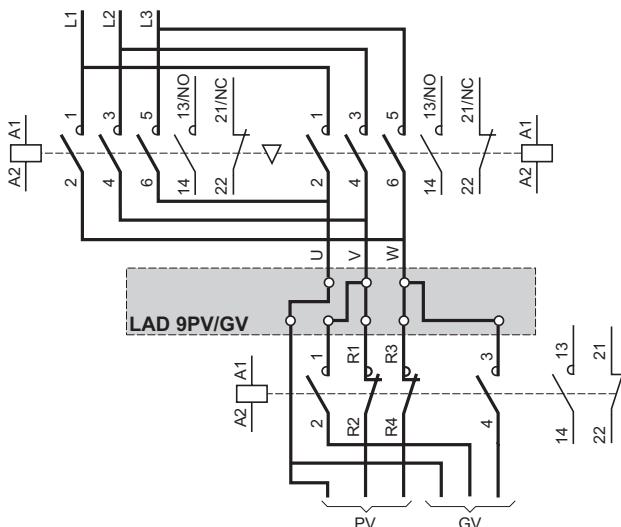

Low speed-High speed cabling kit, spring terminals

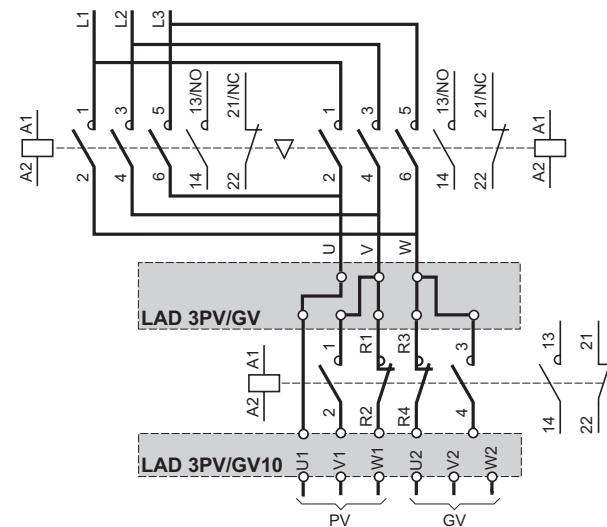

Selection:
pages 5/194 to 5/225

Characteristics:
pages 5/50 to 5/55

References:
pages 5/72 to 5/77

Dimensions:
pages 5/98 and 5/99

Schneider
Electric

5/101

References

TeSys contactors

For switching 3-phase capacitor banks,
used for power factor correction,

Direct connection without choke inductors

Special contactors

Special contactors LC1 D•K are designed for switching 3-phase, single or multiple-step capacitor banks; they conform to standards IEC 60070 and 60831, NFC 54-100, VDE 0560, UL and CSA.

Contactor applications

Specification

Contactors fitted with a block of early make poles and damping resistors, limiting the value of the current on closing to 60 In max.

This current limitation increases the life of all the components of the installation, in particular that of the fuses and capacitors.

The patented design of the add-on block (n° 90 119-20) ensures safety and long life of the installation.

Operating conditions

There is no need to use choke inductors for either single or multiple-step capacitor banks.

Short-circuit protection must be provided by gl type fuses rated at 1.7...2 In.

Maximum operational power

The power values given in the selection table below are for the following operating conditions:

Prospective peak current at switch-on	LC1 D•K	200 In
Maximum operating rate	LC1 DFK, DGK, DLK, DMK, DPK	240 operating cycles/hour
	LC1 DTK, DWK	100 operating cycles/hour
Electrical durability at nominal load	All contactor ratings	400 V 300 000 operating cycles 690 V 200 000 operating cycles

Operational power at 50/60 Hz (1) θ ≤ 55 °C (2)			Instantaneous auxiliary contacts	Tightening torque on cable end	Basic reference, to be completed by adding the voltage code (3)	Weight
220 V	400 V	660 V	N/O	N/C	N.m	kg
220 V	400 V	660 V	1	1	1.2	LC1 DFK11••
240 V	440 V	690 V	—	2	1.2	LC1 DFK02••
						0.430
8.5	16.7	24	1	1	1.7	LC1 DGK11••
			—	2	1.7	LC1 DGK02••
10	20	30	1	1	1.9	LC1 DLK11••
			—	2	1.9	LC1 DLK02••
15	25	36	1	1	2.5	LC1 DMK11••
			—	2	2.5	LC1 DMK02••
20	33.3	48	1	2	5	LC1 DPK12••
25	40	58	1	2	5	LC1 DTK12••
40	60	92	1	2	9	LC1 DWK12••
						1.650

Switching of multiple-step capacitor banks (with equal or different power ratings)

The correct contactor for each step is selected from the above table, according to the power rating of the step to be switched.

Example: 50 kVAR 3-step capacitor bank. Temperature: 50 °C and U = 400 V or 440 V.

One 25 kVAR step: contactor LC1 DMK, one 15 kVAR step: contactor LC1 DGK, and one 10 kVAR step: contactor LC1 DFK.

(1) Operational power of the contactor according to the scheme on the page opposite.

(2) The average temperature over a 24-hour period, in accordance with standards IEC 60070 and 60831 is 45 °C.

(3) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

Volts	24	42	48	110	115	220	230	240	380	400	415	440
50/60 Hz	B7	D7	E7	F7	FE7	M7	P7	U7	Q7	V7	N7	R7

For other voltages between 24 and 440 V, please consult your Regional Sales Office


LC1 DFK11••

511555



5

511556

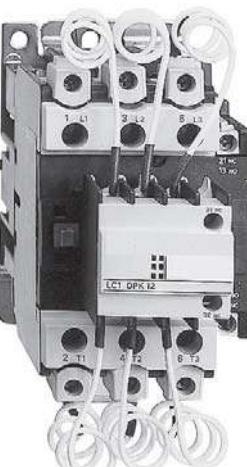

LC1 DPK12••

Dimensions, schemes :
page 5/103

5/102

Schneider
Electric


Dimensions, schemes

TeSys contactors

For switching 3-phase capacitor banks,
used for power factor correction

Dimensions


LC1 DFK, DGK

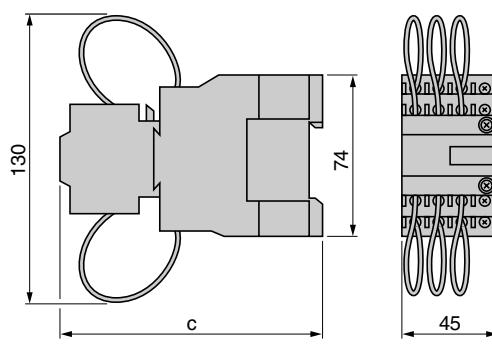

LC1 c Type of fixing

LC1	c	Type of fixing	
DFK	117	LC1 D12	See page 5/94

LC1 DLK, DMK

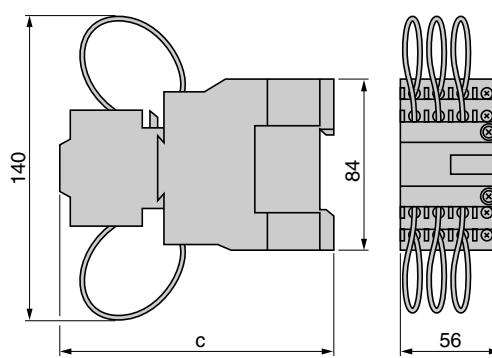


LC1 c Type of fixing

LC1	c	Type of fixing	
DLK	117	LC1 D25	See page 5/94

Schemes

LC1 D•K



LC1 Type of fixing

LC1	Type of fixing		
LC1	DWK	LC1 D80	See page 5/94

Cabling (maximum permissible c.s.a.)

Contactor type LC1	DFK	DGK	DLK	DMK	DPK, DTK	DWK
Number of conductors	1	2	1	2	1	2
Flexible cable with cable end (mm ²)	2.5	1.5	4	2.5	4	6
Solid cable with cable end (mm ²)	4	4	6	6	10	16

References :
page 5/102

Schneider
Electric

5/103

Selection guide

TeSys contactors

From 115 to 2750 A

Applications

Control of all types of motor for standard or severe duty applications
 Control of resistive, inductive and capacitive circuits:
 heating, lighting, $\cos \phi$ rectification, transformers, normal-standby



Rated operational current	le max. AC-3 (Ue ≤ 440 V)
	le max. AC-1 ($\theta \leq 40^\circ C$)

115 A	150 A	185 A	225 A	265 A	330 A
200 A	250 A	275 A	315 A	350 A	400 A

Rated operational voltage	1000 V
----------------------------------	--------

1000 V	1000 V
1000 V	1000 V

Number of poles	3 or 4
------------------------	--------

3 or 4	3 or 4
3 or 4	3 or 4

Rated operational power in category AC-3	220/240 V
	380/400 V
	415 V
	440 V
	500 V
	660/690 V
	1000 V

30 kW	40 kW	55 kW	63 kW	75 kW	100 kW
55 kW	75 kW	90 kW	110 kW	132 kW	160 kW
59 kW	80 kW	100 kW	110 kW	140 kW	180 kW
59 kW	80 kW	100 kW	110 kW	140 kW	200 kW
75 kW	90 kW	110 kW	129 kW	160 kW	200 kW
80 kW	100 kW	110 kW	129 kW	160 kW	220 kW
65 kW	65 kW	100 kW	100 kW	147 kW	160 kW

Add-on auxiliary contact blocks	
--	--

Front mounting, identical to those used on LC1 D contactors (contacts: instantaneous LA1 DN●, time delay LA2 DT or LA3 DR, dust and damp protected LA1 DX or DY or DZ)
--

Associated thermal overload relays and controllers	Manual-auto
	Electronic

LR9 F	
TeSys T	

Interfaces	Specific
	Universal

LA4 FWB	
With or without, depending on the control circuit	

Contactor type	LC1 F115
	LC1 F150


LC1 F115	LC1 F150
LC1 F185	LC1 F225

Reversing contactor type	LC2 F115
	LC2 F150

LC2 F115	LC2 F150
LC2 F185	LC2 F225

Pages	Contactors
	Reversing contactors

5/114 and 5/115	For customer assembly
5/116 and 5/117	5/118 to 5/121



400 A	500 A	630 A	780 A	800 A	—	—	750 A	1000 A	1500 A	1800 A
500 A	700 A	1000 A	1600 A	1000 A	1700 A	2100 A	800 A	1250 A	2000 A	2750 A
1000 V	1000 V	1000 V	1000 V	1000 V	1000 V	1000 V	1000 V	1000 V	1000 V	1000 V
2, 3 or 4	2, 3 or 4	2, 3 or 4	3 or 4	3	3	3	1 to 4	1 to 4	1 to 4	1 to 4
110 kW	147 kW	200 kW	220 kW	250 kW	—	—	220 kW	280 kW	425 kW	500 kW
200 kW	250 kW	335 kW	400 kW	450 kW	—	—	400 kW	500 kW	750 kW	900 kW
220 kW	280 kW	375 kW	425 kW	450 kW	—	—	425 kW	530 kW	800 kW	900 kW
250 kW	295 kW	400 kW	425 kW	450 kW	—	—	450 kW	560 kW	800 kW	900 kW
257 kW	355 kW	400 kW	450 kW	450 kW	—	—	500 kW	600 kW	700 kW	900 kW
280 kW	335 kW	450 kW	475 kW	475 kW	—	—	560 kW	670 kW	750 kW	900 kW
185 kW	335 kW	450 kW	450 kW	450 kW	—	—	530 kW	530 kW	670 kW	750 kW

Front mounting, identical to those used on LC1 D contactors (contacts: instantaneous LA1 DN●●, time delay LA2 DT or LA3 DR, dust and damp protected LA1 DX or DY or DZ)

4 instantaneous contact compositions:
2 N/C + 2 N/O, 3 N/O + 1 N/C, 1 N/O + 3 N/C or 4 N/O

LR9 F	—	—	LR9 F
TeSys T	—	—	TeSys T
LA4 FWB	—	—	—
With or without, depending on the control circuit	—	—	—

LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 F1700	LC1 F2100	LC1 BL	LC1 BM	LC1 BP	LC1 BR
----------	----------	----------	----------	----------	-----------	-----------	--------	--------	--------	--------

For customer assembly

5/114 and 5/115	5/184 and 5/185
5/118 to 5/117	5/186




Characteristics

TeSys contactors

TeSys F contactors (115 to 2100 A)

Control circuit: a.c. or d.c.

Environment

		LC1 F115	LC1 F150	LC1 F185	
Rated insulation voltage (Ui)	Conforming to IEC 60947-4-1	V	1000	1000	
	Conforming to VDE 0110 gr C	V	1500	1500	
Rated impulse withstand voltage (Uimp)	Coil not connected to the power circuit	kV	8	8	
Conforming to standards		EN 60947-1, EN 60947-4-1, IEC 60947-1, IEC 60947-4-1, JEM 1038			
Product certifications		CSA, UL, BV, GL, DNV, RINA, RMROS, LROS, CCC			
Degree of protection	Conforming to IEC 60529	IP 2X front face with shrouds LA9 F			
	Conforming to VDE 0106	Front face protected against direct finger contact with shrouds LA9 F			
Protective treatment	Standard version	"TH"			
Ambient air temperature around the device	Storage	°C	- 60...+ 80		
	Operation	°C	- 5...+ 55		
	Permissible at Uc (1)	°C	- 40...+ 70		
Maximum operating altitude	Without derating	m	3000		
Operating positions	Without derating		 (not to be used for LC1 F780, F1700 and F2100)		
	With derating		 Apply the following derating coefficients: 0.75 on the pull-in voltage, 0.9 on the drop-out voltage and 0.8 on the operational current in AC-1		
			 Apply the following derating coefficients: 1.15 on the pull-in voltage, 1.1 on the drop-out voltage and 0.8 on the operational current in AC-1		
	Not to be used		 In either case: neither the making and breaking capacities nor the electrical and mechanical durabilities can be assured.		
Shock resistance (2) 1/2 sine wave = 11 ms	Contactor open	9 gn	9 gn	7 gn	
	Contactor closed	15 gn	15 gn	15 gn	
Vibration resistance (2) 5...300 Hz	Contactor open	2 gn	2 gn	2 gn	
	Contactor closed	6 gn	6 gn	5 gn	


(1) In these conditions, it is recommended that LX9 F coils be used for contactor sizes F115 to F225.

(2) In the least favourable direction, without change of contact state (coil at Uc). Where higher resistance to mechanical shock is required, select shock-proof contactors. Please consult your Regional Sales Office.

LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 F1700	LC1 F2100
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
1500	1500	1500	1500	1500	1500	1500	1500	1500	1500
8	8	8	8	8	8	8	8	8	8

EN 60947-1, EN 60947-4-1, IEC 60947-1, IEC 60947-4-1, JEM 1038

CSA, UL, BV, GL, DNV, RINA, RMROS, LROS, CCC	UL, CSA, GL, LROS	UL, CSA, CCC (pending)
IP 20 front face with shrouds LA9 F		-
Front face protected against direct finger contact with shrouds LA9 F		-
"TH"		
- 60...+ 80	- 60...+ 80	- 60...+ 80
- 5...+ 55	- 5...+ 55	- 5...+ 40
- 40...+ 70	- 5...+ 55	- 40...+ 60
3000		



(not to be used for LC1 F780, F1700 and F2100)

5

	Apply the following derating coefficients: 0.75 on the pull-in voltage, 0.9 on the drop-out voltage and 0.8 on the operational current in AC-1. Apply the following derating coefficients: 1.15 on the pull-in voltage, 1.1 on the drop-out voltage and 0.8 on the operational current in AC-1. In either case: neither the making and breaking capacities nor the electrical and mechanical durabilities can be assured	Not to be used
--	--	----------------

7 gn	6 gn	6 gn	6 gn	9 gn	6 gn	5 gn	6 gn	6 gn	6 gn
15 gn	15 gn	15 gn	15 gn	15 gn	15 gn	15 gn	15 gn	15 gn	15 gn
2 gn	2 gn	2 gn	1.5 gn	2 gn	2 gn	2.5 gn	2 gn	2 gn	2 gn
5 gn	5 gn	5 gn	5 gn	4 gn	4 gn	5.5 gn	4 gn	4 gn	4 gn

Characteristics (continued)

TeSys contactors

TeSys F contactors (115 to 2100 A)

Control circuit: a.c. or d.c.

Pole characteristics

Contactor type		LC1 F115	LC1 F150	LC1 F185	
Number of poles		3 or 4	3 or 4	3 or 4	
Rated operational current (Ie)(Ue ≤ 440 V)	In AC-3, θ ≤ 55 °C In AC-1, θ ≤ 40 °C	A A	115 200	150 250	185 275
Rated operational voltage (Ue)	Up to	V	1000	1000	1000
Frequency limits	Of the operational current (1)	Hz	16 ^{2/3} ...200	16 ^{2/3} ...200	16 ^{2/3} ...200
Conventional thermal current	θ ≤ 40 °C	A	200	250	275
Rated making capacity	I rms conforming to IEC 60947-4-1	A	Making current: 10 x I in AC-3 or 12 x I in AC-4		
Rated breaking capacity	I rms conforming to IEC 60947-4-1	A	Making and breaking current: 8 x I in AC-3 or 10 x I in AC-4		
Maximum permissible current	For 10 s	A	1100	1200	1500
No current flowing for previous 60 minutes, at θ ≤ 40 °C	For 30 s	A	640	700	920
	For 1 min	A	520	600	740
	For 3 min	A	400	450	500
	For 10 min	A	320	350	400
Short-circuit protection by fuses U ≤ 440 V	Motor circuit (type aM) With thermal overload relay (type gG) gG fuses	A A A	125 200 200	160 200 250	200 315 315
Average impedance per pole	At Ith and 50 Hz	mΩ	0.37	0.35	0.33
Power dissipation per pole	AC-3 for the above operational currents	W	5 15	8 22	12 25
Connection			Maximum c.s.a.		
Bar	Number of bars		2	2	2
Bar		mm	20 x 3	25 x 3	25 x 3
Cable with lug		mm ²	95	120	150
Cable with connector		mm ²	95	120	150
Bolt diameter		mm	Ø 6	Ø 8	Ø 8
Tightening torque	Power circuit connections	N.m	10	18	18

(1) Sine wave without interference. Above these values, please consult your Regional Sales Office.

(2) With set of right-angled connectors **LA9 F2100** (see page 5/125).

(3) Paralleling of poles must be carried out only in accordance with the fuse manufacturer's recommendations.

LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 F1700	LC1 F2100
3 or 4	3 or 4	3 or 4	2, 3 or 4	2, 3 or 4	2, 3 or 4	3 or 4	3	3	3
225	265	330	400	500	630	780	800	—	—
315	350	400	500	700	1000	1250	1600	1700	2100 (2)
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
16 ^{2/3} ...200	16 ^{2/3} ...200	16 ^{2/3} ...200	16 ^{2/3} ...200	16 ^{2/3} ...200	16 ^{2/3} ...200	16 ^{2/3} ...200	16 ^{2/3} ...200	16 ^{2/3} ...200	16 ^{2/3} ...200
315	350	400	500	700	1000	1250	1600	1700	2100 (2)
Making current: 10 x I in AC-3 or 12 x I in AC-4									Making current: 1.5 x I in AC-1
Making and breaking current: 8 x I in AC-3 or 10 x I in AC-4									Making and breaking current: 1.5 x I in AC-1
1800	2200	2650	3600	4200	5050	6250	5500	—	—
1000	1230	1800	2400	3200	4400	5600	4600	—	—
850	950	1300	1700	2400	3400	4600	3600	—	—
560	620	900	1200	1500	2200	3000	2600	—	—
440	480	750	1000	1200	1600	2200	1700	—	—
250	315	400	400	500	630	800	800	—	—
315	500	500	630	800	800	1000	1000	—	—
315	400	500	500	800	1000	2 x 800 (3)	1000	2 x 800 (3)	2 x 1000 (3)
0.32	0.3	0.28	0.26	0.18	0.12	0.10	0.12	0.10	0.10
16	21	31	42	45	48	60	77	—	—
32	37	44	65	88	120	250	120	200	200
2	2	2	2	2	2	3	2	3	4
32 x 4	32 x 4	30 x 5	30 x 5	40 x 5	60 x 5	60 x 5	100 x 5	60 x 5	100 x 5
185	240	240	2 x 150	2 x 240	—	—	—	—	—
185	240	—	—	—	—	—	—	—	—
Ø10	Ø 10	Ø 10	Ø 10	Ø 10	Ø 12	2 x Ø 12	Ø 12	Ø 12 (Ø 10 with set of right-angled connectors LA9 F2100)	
35	35	35	35	35	58	58	58	58 (35 with set of right-angled connectors LA9 F2100)	

Characteristics

TeSys contactors

TeSys F contactors (115 to 2100 A)
Control circuit: a.c.

Control circuit characteristics with LX1 or LX9 coil					
Contactor type			LC1 F115	LC1 F150	LC1 F185
Rated control circuit voltage (Uc)	50 or 60 Hz	V	24...1000		
Control voltage limits ($\theta \leq 55^\circ\text{C}$)					
50 or 60 Hz coils	Operation		0.85...1.1 Uc		
	Drop-out		0.35...0.55 Uc		
40...400 Hz coils	Operation		—		
	Drop-out		—		
Average consumption at 20 °C and at Uc					
~ 50 Hz Inrush	50 Hz coil	VA	550	550	805
	40...400 Hz coil	VA	—	—	—
	Cos φ		0.3	0.3	0.3
Sealed	50 Hz coil	VA	45	45	55
	40...400 Hz coil	VA	—	—	—
	Cos φ		0.3	0.3	0.3
~ 60 Hz Inrush	60 Hz coil	VA	660	660	970
	40...400 Hz coil	VA	—	—	—
	Cos φ		0.3	0.3	0.3
Sealed	60 Hz coil	VA	55	55	66
	40...400 Hz coil	VA	—	—	—
	Cos φ		0.3	0.3	0.3
Heat dissipation		W	12...16	12...16	18...24
Operating time (1)	Closing "C"	ms	23...35	23...35	20...35
	Opening "O"	ms	5...15	5...15	7...15
Mechanical durability at Uc	In millions of operating cycles		10	10	10
Maximum operating rate at ambient temperature $\leq 55^\circ\text{C}$	In operating cycles per hour		2400	2400	2400
Connection			Min/max c.s.a.		
Flexible cable without cable end	1 or 2 conductors	mm ²	1/4	1/4	1/4
Flexible cable with cable end	1 conductor	mm ²	1/4	1/4	1/4
	2 conductors	mm ²	1/2.5	1/2.5	1/2.5
Solid cable without cable end	1 or 2 conductors	mm ²	1/4	1/4	1/4
Tightening torque		N.m	1.2	1.2	1.2
Mechanical latching			Mechanical latch blocks LA6 DK must not be fitted on LC1 F contactors. For similar type of operation, use magnetic latching contactors CR1 F. See pages 5/240 to 5/267		

(1) The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles. The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.
(2) Control circuit characteristics with LX1 coil.

LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 F1700	LC1 F2100
24...1000			48...1000		48...1000	110...500	110...400	110...500 (2)	110...500 (2)
0.85...1.1 Uc	—								
0.35...0.55 Uc	—								
—	0.85...1.1 Uc		0.85...1.1 Uc		0.85...1.1 Uc				
—	0.35...0.55 Uc		0.3...0.5 Uc		0.25...0.5 Uc	0.2...0.4 Uc	0.3...0.5 Uc	0.3...0.5 Uc	0.3...0.5 Uc
805	—	—	—	—	—	—	—	—	—
—	650	650	1075	1100	1650	2100	1700	2200	2200
0.3	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
55	—	—	—	—	—	—	—	—	—
—	10	10	15	18	22	50	12	36	36
0.3	0.9	0.9	0.9	0.9	0.9	0.9	—	0.9	0.9
970	—	—	—	—	—	—	—	—	—
—	650	650	1075	1100	1650	2100	1700	2200	2200
0.3	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
66	—	—	—	—	—	—	—	—	—
—	10	10	15	18	22	50	12	36	36
0.3	0.9	0.9	0.9	0.9	0.9	0.9	—	0.9	0.9
18...24	8	8	14	18	20	2 x 22	25	2 x 18	2 x 18
20...35	40...65	40...65	40...75	40...75	40...80	40...80	60...80	40...75	40...75
7...15	100...170	100...170	100...170	100...170	100...200	130...230	150...180	100...170	100...170
10	10	10	10	10	5	5	5	5	5
2400	2400	2400	2400	2400	1200	600	600	600	600
Min/max c.s.a.									
1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4
1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4
1/2.5	1/2.5	1/2.5	1/2.5	1/2.5	1/2.5	1/2.5	1/2.5	1/2.5	1/2.5
1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4
1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
Mechanical latch blocks LA6 DK must not be fitted on LC1 F contactors. For similar type of operation, use magnetic latching contactors CR1 F. See pages 5/240 to 5/267.									

Characteristics

TeSys contactors

TeSys F contactors (115 to 2100 A)
Control circuit: d.c.

Control circuit characteristics with LX4 coil				
Contactor type				
Rated control circuit voltage (Uc)	—	V	LC1 F115 24...460	LC1 F150 24...460
Control voltage limits (θ ≤ 55 °C)	Operation		0.85...1.1 Uc	0.85...1.1 Uc
	Drop-out		0.15...0.2 Uc	0.15...0.2 Uc
Average consumption at 20 °C and at Uc	—	Inrush	W 560	560 800
		Sealed	W 4.5	4.5 5
Average operating time at Uc (1)	Closing "C"	ms	30...40	30...40
	Opening "O"	ms	30...50	30...50
<i>Note: The arcing time depends on the circuit switched by the poles. For all normal 3-phase applications, the arcing time is less than 10 ms. The load is isolated from the supply after a time equal to the sum of the opening time and the arcing time.</i>				
Mechanical durability at Uc	In millions of operating cycles		10	10
Maximum operating rate at ambient temperature ≤ 55 °C	In operating cycles per hour		2400	2400
Cabling	Flexible cable without cable end	mm ²	Min/max c.s.a. 1/4	1/4
	1 conductor			1/4
	2 conductors			1/4
	Flexible cable with cable end	mm ²	1/4	1/4
	1 conductor			1/4
	2 conductors	mm ²	1/2.5	1/2.5
Solid cable without cable end	1 conductor	mm ²	1/4	1/4
	2 conductors	mm ²	1/4	1/4
Tightening torque	N.m	1.2	1.2	1.2
Mechanical latching	Mechanical latch blocks LA6 DK must not be fitted on LC1 F contactors. For similar type of operation, use magnetic latching contactors CR1 F. See pages 5/240 to 5/267.			

(1) The operating times depend on the type of contactor electromagnet and its control mode. The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles. The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.

LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 F1700	LC1 F2100
24...460	24...460	24...460	48...440	48...440	48...440	110...440	110...400	110...440	110...440
0.85...1.1 Uc	0.85...1.1 Uc	0.85...1.1 Uc	0.85...1.1 Uc	0.85...1.1 Uc	0.85...1.1 Uc	0.85...1.1 Uc	0.85...1.1 Uc	0.85...1.1 Uc	0.85...1.1 Uc
0.15...0.2 Uc	0.15...0.2 Uc	0.15...0.2 Uc	0.2...0.35 Uc	0.2...0.35 Uc	0.2...0.35 Uc	0.2...0.4 Uc	0.3...0.5 Uc	0.2...0.35 Uc	0.2...0.35 Uc
800	750	750	1000	1100	1600	2 x 1000	1900	2100	2100
5	5	5	6	6	9	2 x 21	12	10	10
30...40	40...50	40...50	50...60	50...60	60...70	70...80	60...80	50...60	50...60
30...50	40...65	40...65	45...60	45...60	40...50	100...130	40...50	45...60	45...60
Note: The arcing time depends on the circuit switched by the poles. For all normal 3-phase applications, the arcing time is less than 10 ms. The load is isolated from the supply after a time equal to the sum of the opening time and the arcing time.									
10	10	10	10	10	5	5	5	5	5
2400	2400	2400	2400	2400	1200	600	600	600	600
Min/max c.s.a.									
1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4
1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4
1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4
1/2.5	1/2.5	1/2.5	1/2.5	1/2.5	1/2.5	1/2.5	1/2.5	1/2.5	1/2.5
1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4
1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4	1/4
1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
Mechanical latch blocks LA6 DK must not be fitted on LC1 F contactors. For similar type of operation, use magnetic latching contactors CR1 F. See pages 5/240 to 5/267.									

References

TeSys contactors

TeSys F contactors for motor control in utilisation category AC-3 (115 to 800 A)
Control circuit: a.c. or d.c.



LC1 F225



LC1 F630

3-pole contactors

Standard power ratings of 3-phase motors 50-60 Hz in category AC-3								Rated operational current in AC-3	Basic reference, to be completed by adding the voltage code (2)	Weight
220 V 380 V 660 V 230 V 400 V 415 V 440 V 500 V 690 V 1000 V up to								440 V	Screw fixing, cabling (1)	
kW	kW	kW	kW	kW	kW	kW	A		kg	
30	55	59	59	75	80	65	115	LC1 F115••	3.430	
40	75	80	80	90	100	65	150	LC1 F150••	3.430	
55	90	100	100	110	110	100	185	LC1 F185••	4.650	
63	110	110	110	129	129	100	225	LC1 F225••	4.750	
75	132	140	140	160	160	147	265	LC1 F265••	7.440	
100	160	180	200	200	220	160	330	LC1 F330••	8.600	
110	200	220	250	257	280	185	400	LC1 F400••	9.100	
147	250	280	295	355	335	335	500	LC1 F500••	11.350	
200	335	375	400	400	450	450	630	LC1 F630••	18.600	
220	400	425	425	450	475	450	780	LC1 F780••	39.500	
250	450	450	450	450	475	450	800	LC1 F800••	18.750	

Note: auxiliary contact blocks, modules and accessories: see pages 5/122 to 5/127.

(1) Power terminals can be protected against direct finger contact by the addition of shrouds, to be ordered separately, except on contactors LC1 F780 (see page 5/126).

(2) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office).

Volts ~	24	48	110	115	120	208	220	230	240	380	400	415	440
LC1 F115...F225													
50 Hz (coil LX1)	B5	E5	F5	FE5	—	—	M5	P5	U5	Q5	V5	N5	—
60 Hz (coil LX1)	—	E6	F6	—	G6	L6	M6	—	U6	Q6	—	—	R6
40...400 Hz (coil LX9)	—	E7	F7	FE7	G7	L7	M7	P7	U7	Q7	V7	N7	R7
LC1 F265...F330													
40...400 Hz (coil LX1)	B7	E7	F7	FE7	G7	L7	M7	P7	U7	Q7	V7	N7	R7
LC1 F400...F630													
40...400 Hz (coil LX1)	—	E7	F7	FE7	G7 (3)	L7	M7	P7	U7	Q7	V7	N7	R7
LC1 F780													
40...400 Hz (coil LX1)	—	—	F7	FE7	F7	L7	M7	P7	U7	Q7	V7	N7	R7
LC1 F800													
40...400 Hz (coil LX4) (4)	—	—	FW	FW	FW	—	MW	MW	MW	QW	QW	QW	—
Volts ::	24	48	110	125	220	230	250	400	440				
LC1 F115...F330													
(coil LX4 F)	BD	ED	FD	GD	MD	MD	UD	—	RD				
LC1 F400...F630													
(coil LX4 F)	—	ED	FD	GD	MD	—	UD	—	RD				
LC1 F780													
(coil LX4 F)	—	—	FD	GD	MD	—	UD	—	RD				
LC1 F800													
(coil LX4 F)	—	—	FW	FW	MW	MW	—	QW	—				

(3) F7 for LC1 F630.

(4) Coil LX4 F8•• + rectifier DR5TE••.

Selection :
pages 5/194 to 5/217

Characteristics :
pages 5/106 to 5/113

Dimensions :
pages 5/140 to 5/142

Schemes :
page 5/146

5/114

Schneider
Electric

References (continued)

TeSys contactors

TeSys F contactors for control in category AC-1,
(200 to 2100 A)
Control circuit: a.c. or d.c.



LC1 F1854



LC1 F4004



LC1 F6304



LC1 F1700



LC1 F2100

2, 3 or 4-pole contactors

Maximum current in AC-1 ($\theta \leq 40^\circ\text{C}$)	Number of poles	Basic reference, to be completed by adding the voltage code (2)	Weight kg
A	d	Screw fixing, cabling (1)	
200	3	LC1 F115••	3.430
	4	LC1 F1154••	3.830
250	3	LC1 F150••	3.430
	4	LC1 F1504••	3.830
275	3	LC1 F185••	4.650
	4	LC1 F1854••	5.450
315	3	LC1 F225••	4.750
	4	LC1 F2254••	5.550
350	3	LC1 F265••	7.440
	4	LC1 F2654••	8.540
400	3	LC1 F330••	8.600
	4	LC1 F3304••	9.500
500	2	LC1 F4002••	8.000
	3	LC1 F400••	9.100
	4	LC1 F4004••	10.200
700	2	LC1 F5002••	9.750
	3	LC1 F500••	11.350
	4	LC1 F5004••	12.950
1000	2	LC1 F6302••	15.500
	3	LC1 F630••	18.600
	4	LC1 F6304••	21.500
1250	2	LC1 F6302••S011	15.500
	3	LC1 F630••S011	18.600
	4	LC1 F6304••S011	21.500
1600	3	LC1 F780••	39.500
	4	LC1 F7804••	48.000
1700	3	LC1 F1700	30.000
2100 (3)	3	LC1 F2100	31.000

Note: auxiliary contact blocks, modules and accessories: see pages 5/122 to 5/127

(1) Power terminals can be protected against direct finger contact by the addition of shrouds, to be ordered separately (except LC1 F780, LC1 F1700 and LC1 F2100), see page 5/126.

(2) Standard control circuit voltages, see previous page.

(3) With set of right-angled connectors LA9 F2100 (see page 5/125).

5

Selection :
pages 5/194 to 5/217

Characteristics :
pages 5/106 to 5/113

Dimensions :
pages 5/140 to 5/142

Schemes :
page 5/146

Schneider
Electric

5/115

References

TeSys contactors

TeSys F reversing contactors for motor control
in utilisation category AC-3 (115 to 265 A),
pre-assembled

Control circuit: a.c. or d.c.



LC2 F115

523097

3-pole reversing contactors (horizontally mounted) (1)										
Pre-wired power connections										
Standard power ratings of 3-phase motors 50/60 Hz in category AC-3							Operational current in AC-3	Maximum operational voltage	Contactors supplied without coil (2)	Weight
220 V 380 V 230 V 400 V 415 V 440 V 500 V 690 V 1000 V							440 V up to		Fixing, cabling (3)	
kW	kW	kW	kW	kW	kW	kW	A	V	LC2 F115	kg
30	55	59	59	75	80	65	115	1000	LC2 F115	7.560
40	75	80	80	90	100	65	150	1000	LC2 F150	7.560
55	90	100	100	110	110	100	185	1000	LC2 F185	10.100
63	110	110	110	129	129	100	225	1000	LC2 F225	14.200
75	132	140	140	160	160	147	265	1000	LC2 F265	16.480

Accessories (to be ordered separately)				
Description	For reversing contactors	Quantity required	Reference	Weight kg
Power terminal protection shrouds	LC2 F115	2	LA9 F701	0.250
	LC2 F150, F185	2	LA9 F702	0.250
	LC2 F225, F265	2	LA9 F703	0.250
Auxiliary contact blocks and add-on modules	–	–	See pages 5/122 to 5/127	

(1) Fitted with a mechanical interlock without electrical interlocking. Order separately 2 auxiliary contact blocks **LAD N•1** to obtain electrical interlocking between the 2 contactors, see page 5/123 For accessories, see pages 5/124 to 5/127

(2) Coils to be ordered separately:

- a.c. supply, see pages 5/130 and 5/131,

- d.c. supply, see page 5/133

(3) Screw fixing.

Power terminals can be protected against direct finger contact by the addition of shrouds, to be ordered separately, see above.

Selection:
pages 5/194 to 5/217

Dimensions:
pages 5/148 to 5/150

Schemes:
page 5/151

5/116

Schneider
Electric

References (continued)

TeSys contactors

TeSys F changeover contactor pairs for control in utilisation category AC-1 (200 to 350 A), pre-assembled

Control circuit: a.c. or d.c.



LC2 F1854

52698

4-pole changeover contactor pairs (horizontally mounted) (1)

Pre-wired power connections

Utilisation category AC-1 Non inductive loads Maximum operational current $\theta < 40^\circ\text{C}$	Maximum operational voltage	Contactors supplied without coil (2) Complete reference	Weight
A	V	Fixing, cabling (3)	kg
200	1000	LC2 F1154	8.860
250	1000	LC2 F1504	8.860
275	1000	LC2 F1854	12.100
315	1000	LC2 F2254	15.200
350	1000	LC2 F2654	19.480

Accessories (to be ordered separately)

Description	For changeover pairs	Quantity required	Reference	Weight kg
Power terminal protection shrouds	LC2 F1154	2	LA9 F706	0.250
	LC2 F1504, F1854	2	LA9 F707	0.250
	LC2 F2254, F2654	2	LA9 F708	0.250
Auxiliary contact blocks and add-on modules	—	—	See pages 5/122 to 5/127	

(1) Fitted with a mechanical interlock without electrical interlocking. Order separately 2 auxiliary contact blocks **LAD №1** to obtain electrical interlocking between the 2 contactors, see page 5/123 For accessories, see pages 5/124 to 5/127

(2) Coils to be ordered separately:

- a.c. supply, see page 5/130,
- d.c. supply, see page 5/136.

(3) Screw fixing.

Power terminals can be protected against direct finger contact by the addition of shrouds, to be ordered separately, see above.

5

Selection:
pages 5/194 to 5/217

Dimensions:
pages 5/148 to 5/150

Schemes:
page 5/151

Schneider
Electric

5/117

Combinations

TeSys contactors

TeSys F reversing contactors and changeover contactor pairs

Components for assembling 3-pole reversing contactors and changeover contactor pairs, for customer assembly


Horizontally mounted

Reversers assembled using 2 contactors of identical rating, type :

LC1 F115
LC1 F150
LC1 F185
LC1 F225
LC1 F265
LC1 F330
LC1 F400
LC1 F500
LC1 F630
LC1 F800

Mechanical interlocks


LA9 F•970 (2)



Sets of power connections


Reversing contactors

LA9 F•••76 (2)

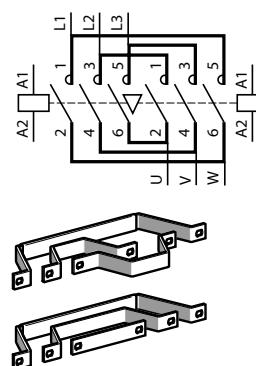

3-pole changeover contactor pairs (1)

LA9 F•••82 (2)



Vertically mounted


Reversers assembled using 2 contactors of identical rating, type :

LC1 F115
LC1 F150
LC1 F185
LC1 F225
LC1 F265
LC1 F330
LC1 F400
LC1 F500
LC1 F630
LC1 F800


Reversers assembled using 2 contactors of different ratings, see page 5/120

Mechanical interlocks

LA9 FF4F
LA9 FG4G




LA9 FH4H
LA9 FJ4J
LA9 FK4K
LA9 FL4L



LC1 F780

LA9 FX970

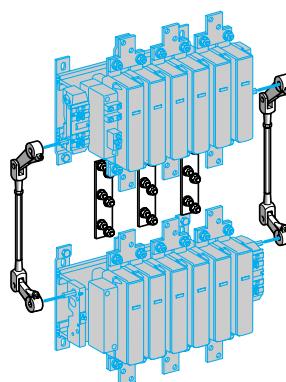

(1) For 4-pole changeover contactor pairs, see pages 5/120 and 5/121

(2) Complete references: see page 5/119.

References

TeSys contactors

TeSys F reversing contactors and changeover pairs
 Components for assembling 3-pole reversing contactors
 and changeover contactor pairs, for customer assembly
 Control circuit: a.c. or d.c.

Reversers assembled using 2 contactors of identical rating				
Contactor type (1)	Set of power connections Reference	Weight kg	Mechanical interlock Kit reference	Weight kg
For assembly of 3-pole reversing contactors for motor control				
Horizontally mounted				
LC1 F115	LA9 FF976	0.600	LA9 FF970	0.060
LC1 F150	LA9 F15076	0.600	LA9 FF970	0.060
LC1 F185	LA9 FG976	0.780	LA9 FG970	0.060
LC1 F225	LA9 F22576	1.500	LA9 FG970	0.060
LC1 F265	LA9 FH976	1.500	LA9 FJ970	0.140
LC1 F330	LA9 FJ976	2.100	LA9 FJ970	0.140
LC1 F400	LA9 FJ976	2.100	LA9 FJ970	0.140
LC1 F500	LA9 FK976	2.350	LA9 FJ970	0.140
LC1 F630 or F800	LA9 FL976	3.800	LA9 FL970	0.150
Vertically mounted				
LC1 F115 or F150	(2)	—	LA9 FF4F	0.345
LC1 F185	(2)	—	LA9 FG4G	0.350
LC1 F225	(2)	—	LA9 FG4G	0.350
LC1 F265 or F330	(2)	—	LA9 FH4H	1.060
LC1 F400	(2)	—	LA9 FJ4J	1.200
LC1 F500	(2)	—	LA9 FK4K	1.200
LC1 F630 or F800	(2)	—	LA9 FL4L	1.220
LC1 F780	(3)	—	LA9 FX970 (3)	6.100
For assembly of 3-pole changeover contactor pairs (4)				
Horizontally mounted				
LC1 F115	LA9 FF982	0.460	LA9 FF970	0.060
LC1 F150	LA9 F15082	0.460	LA9 FF970	0.060
LC1 F185	LA9 FG982	0.610	LA9 FG970	0.060
LC1 F225	LA9 F22582	1.200	LA9 FG970	0.060
LC1 F265	LA9 FH982	1.200	LA9 FJ970	0.140
LC1 F330	LA9 FJ982	1.800	LA9 FJ970	0.140
LC1 F400	LA9 FJ982	1.800	LA9 FJ970	0.140
LC1 F500	LA9 FK982	2.300	LA9 FJ970	0.140
LC1 F630 or F800	LA9 FL982	3.400	LA9 FL970	0.150
Vertically mounted				
LC1 F115 or F150	(2)	—	LA9 FF4F	0.345
LC1 F185	(2)	—	LA9 FG4G	0.350
LC1 F225	(2)	—	LA9 FG4G	0.350
LC1 F265 or F330	(2)	—	LA9 FH4H	1.060
LC1 F400	(2)	—	LA9 FJ4J	1.200
LC1 F500	(2)	—	LA9 FK4K	1.200
LC1 F630 or F800	(2)	—	LA9 FL4L	1.220
LC1 F780	(3)	—	LA9 FX970 (3)	7.800

- (1) To order the 2 contactors: see pages 5/114 and 5/115. For the 2 auxiliary contact blocks **LAD №1** required to obtain electrical interlocking between the 2 contactors, see page 5/123
 For accessories, see pages 5/124 to 5/127
- (2) With the exception of contactors **LC1 F780**, all power connections are to be made by the customer.
- (3) Double mechanical interlock mechanism with 2 interlock connecting rods and 3 power connecting links.
- (4) For assembly of 4-pole changeover contactor pairs, see pages 5/120 and 5/121

Combinations

TeSys contactors

TeSys F changeover contactor pairs


Components for assembling 3 and 4-pole changeover contactor pairs, for customer assembly

Horizontally mounted

Contactor pairs assembled using 2 contactors of identical rating, type :
 LC1 F1154
 LC1 F1504
 LC1 F1854
 LC1 F2254
 LC1 F2654
 LC1 F3304
 LC1 F4004
 LC1 F5004
 LC1 F6304

Mechanical interlocks



LA9 F•970



Sets of power connections

4-pole changeover contactor pairs (1)

LA9 F•••77




Vertically mounted


Contactor pairs assembled using 2 contactors of identical rating, type :
 LC1 F1154
 LC1 F1504
 LC1 F1854
 LC1 F2254
 LC1 F2654
 LC1 F3304
 LC1 F4004
 LC1 F5004
 LC1 F6304

Mechanical interlocks


Assembly A
 LA9 FF4F
 LA9 FG4G



Assembly B
 LA9 FH4H
 LA9 FJ4J
 LA9 FK4K
 LA9 FL4L




Assembly C
 LA9 FX971

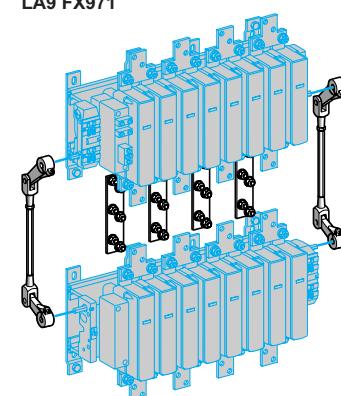


5

Contactor pairs assembled using 2 contactors of different ratings, type :
 LC1 F115 or F1154
 LC1 F150 or F1504
 LC1 F185 or F1854
 LC1 F225 or F2254
 LC1 F265 or F2654
 LC1 F330 or F3304
 LC1 F400 or F4004
 LC1 F500 or F5004
 LC1 F630 or F6304
 LC1 F800


Assembly A
 LA9 FG4F



Assembly B
 LA9 FH4F, LA9 FH4G
 LA9 FJ4F, LA9 FJ4G
 LA9 FK4F, LA9 FK4G
 LA9 FL4F, LA9 FL4G




Assembly C
 LA9 FJ4H
 LA9 FK4H, LA9 FK4J
 LA9 FL4H, LA9 FL4J and LA9 FL4K



Contactor pairs assembled using 3 contactors of identical or different ratings, type :

LC1 F115 or F1154
 LC1 F150 or F1504
 LC1 F185 or F1854
 LC1 F225 or F2254
 LC1 F265 or F2654
 LC1 F330 or F3304
 LC1 F400 or F4004
 LC1 F500 or F5004
 LC1 F630 or F6304
 LC1 F800

LA9 F•••4• : see pages 5/128 and 5/129

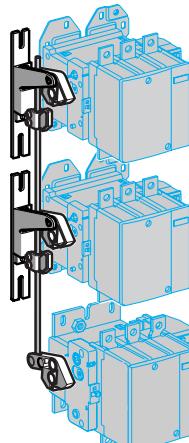

Important: the contactor ratings must be in decreasing size from top to bottom.

(1) For 3-pole changeover contactor pairs, see pages 5/118 and 5/119.

References

TeSys contactors

TeSys F changeover contactor pairs

Components for assembling 3 and 4-pole changeover contactor pairs, for customer assembly

Control circuit: a.c. or d.c.

Contactor pairs assembled using 2 contactors of identical rating

For assembly of 4-pole changeover contactor pairs (1)

Contactor type (2)	Set of power connections Reference	Weight kg	Mechanical interlock Kit reference	Weight kg
Horizontally mounted				
LC1 F1154	LA9 FF977	0.460	LA9 FF970	0.060
LC1 F1504	LA9 F15077	0.460	LA9 FF970	0.060
LC1 F1854	LA9 FG977	0.610	LA9 FG970	0.060
LC1 F2254	LA9 F22577	1.200	LA9 FG970	0.060
LC1 F2654	LA9 FH977	1.200	LA9 FJ970	0.140
LC1 F3304	LA9 FJ977	1.800	LA9 FJ970	0.140
LC1 F4004	LA9 FJ977	1.800	LA9 FJ970	0.140
LC1 F5004	LA9 FK977	2.300	LA9 FJ970	0.140
LC1 F6304	LA9 FL977	3.400	LA9 FL970	0.150
Vertically mounted				
LC1 F1154 or F1504	(3)	—	LA9 FF4F	0.345
LC1 F1854	(3)	—	LA9 FG4G	0.350
LC1 F2254	(3)	—	LA9 FG4G	0.350
LC1 F2654 or F3304	(3)	—	LA9 FH4H	1.060
LC1 F4004	(3)	—	LA9 FJ4J	1.200
LC1 F5004	(3)	—	LA9 FK4K	1.200
LC1 F6304	(3)	—	LA9 FL4L	1.220
LC1 F7804	(4)	—	LA9 FX971 (4)	7.800

Contactor pairs assembled using 2 contactors of different ratings

For assembly of 3 or 4-pole changeover contactor pairs

Contactor type(1)	At bottom	At top	Mechanical interlock Kit reference	Weight kg
Vertically mounted				
LC1 F115 or F1154 or LC1 F150 or F1504	LC1 F185 or F1854 LC1 F225 or F2254 LC1 F265 or F2654 LC1 F330 or F3304 LC1 F400 or F4004 LC1 F500 or F5004 LC1 F630, F6304 or F800	LA9 FG4F LA9 FG4F LA9 FH4F LA9 FH4F LA9 FJ4F LA9 FK4F LA9 FL4F	LA9 FG4F LA9 FG4F LA9 FH4F LA9 FH4F LA9 FJ4F LA9 FK4F LA9 FL4F	0.350 0.350 0.870 0.870 0.930 0.940 0.940
LC1 F185 or F1854 or LC1 F225 or F2254	LC1 F265 or F2654 LC1 F330 or F3304 LC1 F400 or F4004 LC1 F500 or F5004 LC1 F630, F6304 or F800	LA9 FH4G LA9 FH4G LA9 FJ4G LA9 FK4G LA9 FL4G	LA9 FH4G LA9 FH4G LA9 FJ4G LA9 FK4G LA9 FL4G	0.860 0.860 0.940 0.940 0.950
LC1 F265 or F2654 or LC1 F330 or F3304	LC1 F400 or F4004 LC1 F500 or F5004 LC1 F630, F6304 or F800	LA9 FJ4H LA9 FK4H LA9 FL4H	LA9 FJ4H LA9 FK4H LA9 FL4H	1.130 1.130 1.140
LC1 F400 or F4004	LC1 F500 or F5004 LC1 F630 or F6304 or F800	LA9 FK4J LA9 FL4J	LA9 FK4J LA9 FL4J	1.200 1.210
LC1 F500 or F5004	LC1 F630 or F6304 or F800	LA9 FL4K	LA9 FL4K	1.210

For assembly of reversers using 3 contactors, vertically mounted

See pages 5/128 and 5/129.

(1) For assembly of 3-pole changeover contactor pairs, see pages 5/118 and 5/120

(2) To order the 2 contactors: see pages 5/114 and 5/115. For the 2 auxiliary contact blocks


LAD №1 required to obtain electrical interlocking between the 2 contactors, see page 5/123.

For accessories, see pages 5/124 to 5/127

(3) All power connections are to be made by the customer.

(4) Double mechanical interlock mechanism with 2 interlock connecting rods and 4 power connecting links.

5/122

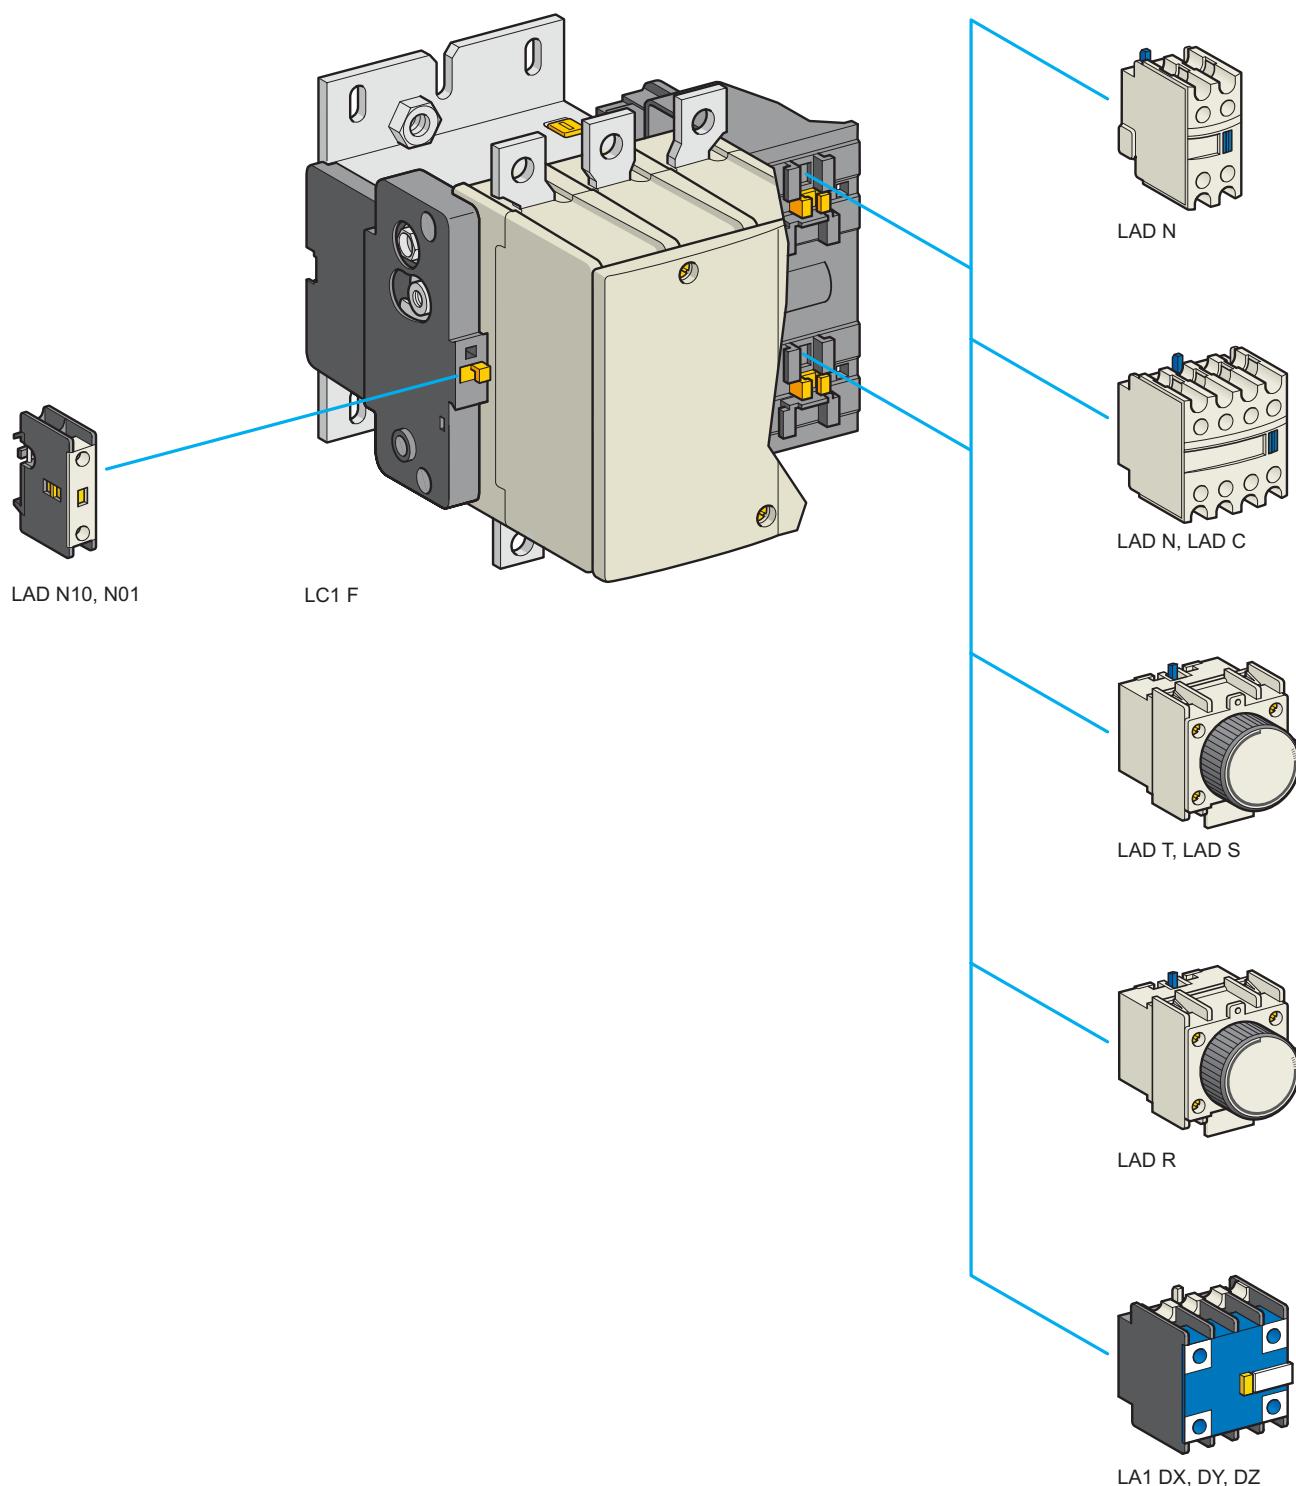

Schneider
Electric

References

TeSys contactors

TeSys F contactors

Auxiliary contact blocks

Instantaneous auxiliary contact blocks

For use in normal operating environments

Number of contacts	Maximum number of blocks per contactor Clip-on mounting	Composition	Reference	Weight kg
1	1	- - 1 -	LAD N10	0.020
		- - - 1	LAD N01	0.020
2	2	- - 1 1	LAD N11	0.030
		- - 2 -	LAD N20	0.030
		- - - 2	LAD N02	0.030
4	2	- - 2 2	LAD N22	0.050
		- - 1 3	LAD N13	0.050
		- - 4 -	LAD N40	0.050
		- - - 4	LAD N04	0.050
		- - 3 1	LAD N31	0.050
		- - 2 2 (1)	LAD C22	0.050
With terminal referencing conforming to EN 50012				
2	2	- - 1 1	LAD N11P	0.030
		- - 1 1	LAD N11G	0.030
4	2	- - 2 2	LAD N22P	0.050
		- - 2 2	LAD N22G	0.050

Instantaneous auxiliary contact blocks for connection by lugs

This type of connection is not possible for blocks with 1 contact or blocks with dust and damp protected contacts. For all other instantaneous auxiliary contact blocks, add the figure 6 to the end of the references selected above. Example: LAD N11 becomes LAD N116.

Instantaneous auxiliary contact blocks with dust and damp protected contacts

Recommended for use in particularly harsh industrial environments

Number of contacts	Maximum number of blocks per contactor Clip-on mounting	Composition	Reference	Weight kg
2	2	2 - - -	LA1 DX20	0.040
		2 2 (2) - -	LA1 DY20	0.040
4	2	2 - 2 -	LA1 DZ40	0.050
		2 - 1 1	LA1 DZ31	0.050

Time delay auxiliary contact blocks

Number of contacts	Maximum number of blocks per contactor Clip-on mounting	Time delay		Reference	Weight kg
		Type	Range		
1 N/O + 1 N/C	2	On-delay	0.1...3 (3)	LAD T0	0.060
			0.1...30	LAD T2	0.060
			10...180	LAD T4	0.060
			1...30 (4)	LAD S2	0.060
		Off-delay	0.1...3 (3)	LAD R0	0.060
			0.1...30	LAD R2	0.060
			10...180	LAD R4	0.060

Interface for PLC control

Type of I/O	Reference	Weight kg
Inputs: --- 24 V - 100 mA Outputs: ~ 480 V - 25 A	LA4 FSRE ▲	-

(1) Including 1 N/O + 1 N/C make before break

(2) Device fitted with 4 earth screen continuity terminals.

(3) With extended scale from 0.1 to 0.6 s.

(4) With switching time of 40 ms ± 15 ms between opening of the N/C contact and closing of the N/O contact.




▲Available 2nd half 2009.

References

TeSys contactors

TeSys F contactors

Suppressor blocks



5

Suppressor blocks

RC circuits (resistor-capacitor)

- Effective protection for circuits highly sensitive to "high frequency" interference. For use only in cases where the voltage is virtually sinusoidal, i.e. less than 5% total harmonic distortion.
- Voltage limited to 3 Uc max. and oscillating frequency limited to 400 Hz max.
- Slight increase in drop-out time (1.1 to 1.3 times the normal time).

Mounting	Uc	Reference	Weight kg
Clip-on mounting on all ratings and all a.c. coils.	~	24...48 V LA4 FRCE 50...110 V LA4 FRCF 127...240 V LA4 FRCP 265...415 V LA4 FRCV	0.040 0.040 0.040 0.040
Suppressor block bracket		LA9 D09981	0.010

Varistors (peak limiting)

- Protection provided by limiting the transient voltage to 2 Uc max.
- Maximum reduction of transient voltage peaks.

Clip-on mounting on all ratings and all coils.	~ or ...	24...48 V LA4 FVE 50...110 V LA4 FVF 127...240 V LA4 FVP 265...415 V LA4 FVV	0.040 0.040 0.040 0.040
--	----------	---	----------------------------------

Diodes

- No overvoltage or oscillating frequencies.
- Increase in drop-out time (3 to 4 times the normal time).
- Polarised component.

Clip-on mounting on all ratings and all d.c. coils.	---	24...48 V LA4 FDE 55...110 V LA4 FDF 125...250 V LA4 FDP 280...440 V LA4 FDV	0.040 0.040 0.040 0.040
---	-----	---	----------------------------------

Bidirectional peak limiting diodes (transil)

- Protection provided by limiting the transient voltage to between 2 and 2.5 times Uc max.
- Maximum reduction of transient voltage peaks.

Clip-on mounting on all ratings and all coils.	~ or ...	24...48 V LA4 FTE 50...110 V LA4 FTF 127...240 V LA4 FTP 265...415 V LA4 FTV	0.040 0.040 0.040 0.040
--	----------	---	----------------------------------

Connection accessories

For use on 4-pole contactors	Set of 4 links	Weight kg
Set reference		
Links for parallel connection of poles (in pairs)		
LC1 F1154	LA9 FF602	0.200
LC1 F1504, F1854	LA9 FG602	0.350
LC1 F2254, F2654, F3304, F4004	LA9 FH602	1.000
LC1 F5004	LA9 FK602	1.750
LC1 F6304	LA9 FL602	3.000

Links for "star" connection of 3 poles

LC1 F115	LA9 FF601	0.035
LC1 F150, F185	LA9 FG601	0.050
LC1 F225, F265, F330, F400	LA9 FH601	0.120
LC1 F500	LA9 FK601	0.180
LC1 F630, F800	LA9 FL601	0.550

Control circuit voltage take-off from power terminals

For use with contactors	Mounted on bolt size	Sold in lots of	Unit reference	Weight kg
LC1 F115	M6	10	DZ3 FA3	0.004
LC1 F150, F185	M8	10	DZ3 GA3	0.004
LC1 F225...F500	M10	10	DZ3 HA3	0.006
LC1 F630, F800	M12	10	DZ3 JA3	0.009


Dimensions :
pages 5/143 and 5/144

5/124


Schneider
Electric

References (continued)


TeSys contactors
TeSys Fcontactors
Accessories




LA9 FF981



LA9 FG979



LA9 FL980



LA9 F2100

Right-angled connectors

For contactors or thermal overload relays

For use with		With connector plates		Set of 3 connectors	
Contactors	Thermal overload relays (1)	Width	Type	Set reference	Weight kg
LC1 F115	LR9 F5●67, LR9 F67	15 mm	Rear	LA9 FF981	0.060
			Side	LA9 FF979	0.240
			Large surface area	LA9 FF980	0.150
LC1 F150, F185	LR9 F5●69, F5●71, LR9 F69, F71	20 mm	Rear	LA9 FG981	0.080
			Side	LA9 FG979	0.350
			Large surface area	LA9 FG980	0.200
LC1 F225, F265, F330, F400	LR9 F7●75, LR9 F75	25 mm	Rear	LA9 FJ981	0.430
			Side	LA9 FJ979	0.750
			Large surface area	LA9 FJ980	0.490
LC1 F500	LR9 F7●79, F7●81, LR9 F79, F81	30 mm	Rear	LA9 FK981	0.480
			Side	LA9 FK979	0.920
			Large surface area	LA9 FK980	0.800
LC1 F630, F800	LR9 F7●81, LR9 F81	40 mm	Rear	LA9 FL981	1.210
			Side	LA9 FL979	2.570
			Large surface area	LA9 FL980	3.190
For use with		With connector plates		Set of 6 connectors	
Contactors	Thermal overload relays (1)	Width	Type	Set reference	Weight kg
LC1 F1700, F2100	—	60 mm	Rear	LA9 F2100	9.550

5

Connection accessories

For reversing contactors or "star-delta" contactors combined with a thermal overload relay

For use with		Width of connector plates	Set of 3 busbars	
Contactors	Thermal overload relays (1)	Width	Set reference	Weight kg
LC1 F115	LR9 F5●57, F5●63 LR9 F5●67, F5●69 LR9 F69, F71	15 mm	LA7 F401	0.110
LC1 F150 and F185	LR9 F5●57, F5●63	20 mm	LA7 F402	0.110
LC1 F185	LR9 F5●71, LR9 F71	25 mm	LA7 F407	0.160
LC1 F225 and F265	LR9 F5●71, LR9 F71	25 mm	LA7 F403	0.160
	LR9 F7●75, F7●79 LR9 F75, F79	25 mm	LA7 F404	0.160
LC1 F330 and F400	LR9 F7●75, F7●79 LR9 F75, F79	25 mm	LA7 F404	0.160
	LC1 F400	LR9 F7●81, LR9 F81	25 mm	LA7 F404
LC1 F500	LR9 F7●75, F7●79 LR9 F7●81 LR9 F75, F79, F81	30 mm	LA7 F405	0.270
LC1 F630, F800	LR9 F7●81, LR9 F81	40 mm	LA7 F406	0.600

(1) For protection relays class 10, replace the ● with a 3 and for class 20, replace the ● with a 5.


Dimensions :
pages 5/143 and 5/144

Schneider
Electric


5/125

References (continued)

TeSys contactors
TeSys F contactors
Accessories



LA9 F103



LA9 F701


Insulated terminal blocks				
For use on 3-pole contactors	Connection	Tightening tool	Set of 2 blocks Set reference	Weight kg
LC1 F115, F150, F185	1 x 16...150 mm ² or 2 x 16...95 mm ²	4 mm hexagonal socket key	LA9 F103	0.560
Power terminal protection shrouds				
For use on 2, 3 and 4-pole contactors	Number of shrouds per set	Set reference	Weight kg	
LC1 F115	6	LA9 F701	0.250	
LC1 F150, F185	6	LA9 F702	0.250	
LC1 F225, F265, F330, F400 and F4002 F500 and F5002	6	LA9 F703	0.250	
LC1 F630, F6302 and F800	6	LA9 F704	0.250	
LC1 F1154	8	LA9 F706	0.300	
LC1 F1504 and F1854	8	LA9 F707	0.300	
LC1 F2254, F2654, F3304, F4004, F5004	8	LA9 F708	0.300	
LC1 F6304	8	LA9 F709	0.300	

References


TeSys contactors

TeSys F contactors


Spare parts



LA5 FG431



LA5 F40050

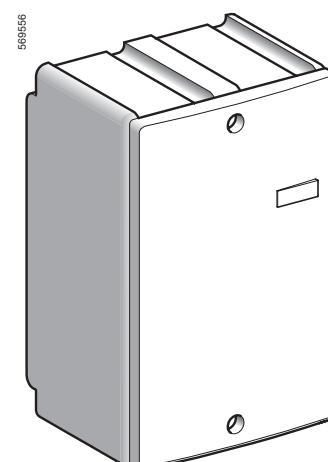

LA5 F210050

Sets of contacts

Per pole: 2 fixed contacts, 1 moving contact, 2 deflectors, 1 back-plate, clamping screws and washers.

For contactor	Type	Replacement Reference for	Weight kg
2-pole	LC1 F4002	2 poles LA5 F400802	1.350
	LC1 F5002	2 poles LA5 F500802	1.950
	LC1 F6302	2 poles LA5 F630802	4.700
	LC1 F6302S011	2 poles LA5 F630802S011	4.800
3-pole	LC1 F115. F150	3 poles LA5 FF431	0.270
	LC1 F185. F225	3 poles LA5 FG431	0.350
	LC1 F265	3 poles LA5 FH431	0.660
	LC1 F330. F400	3 poles LA5 F400803	2.000
	LC1 F500	3 poles LA5 F500803	2.950
	LC1 F630	3 poles LA5 F630803	6.100
	LC1 F780	1 pole LA5 F780801 (1)	4.700
		3 poles LA5 F780803	13.200
	LC1 F800	3 poles LA5 F800803	6.100
	LC1 F630S011	3 poles LA5 F630803S011	6.200
4-pole	LC1 F1504. F1154	4 poles LA5 FF441	0.360
	LC1 F1854. F2254	4 poles LA5 FG441	0.465
	LC1 F2654	4 poles LA5 FH441	0.880
	LC1 F3304. F4004	4 poles LA5 F400804	2.700
	LC1 F5004	4 poles LA5 F500804	3.900
	LC1 F6304	4 poles LA5 F630804	8.150
	LC1 F7804	1 pole LA5 F780801 (1)	4.700
		4 poles LA5 F780804	17.300
	LC1 F6304S011	4 poles LA5 F630804S011	8.400

Arc chambers

For contactor	Type	Replacement Reference for	Weight kg
2-pole	LC1 F4002	2 poles LA5 F400250	0.870
	LC1 F5002	2 poles LA5 F500250	1.250
	LC1 F6302	2 poles LA5 F630250	2.100
	LC1 F6302S011	2 poles LA5 F630250	2.100
3-pole	LC1 F115	3 poles LA5 F11550	0.490
	LC1 F150	3 poles LA5 F15050	0.490
	LC1 F185	3 poles LA5 F18550	0.670
	LC1 F225	3 poles LA5 F22550	0.670
	LC1 F265	3 poles LA5 F26550	0.920
	LC1 F330	3 poles LA5 F33050	1.300
	LC1 F400	3 poles LA5 F40050	1.300
	LC1 F500	3 poles LA5 F50050	1.850
	LC1 F630	3 poles LA5 F63050	3.150
	LC1 F780	1 pole LA5 F780150 (1)	2.100
	LC1 F800	3 poles LA5 F80050	3.150
	LC1 F630S011	3 poles LA5 F63050	3.150
	LC1 F1700	6 poles LA5 F170050 (2)	3.750
	LC1 F2100	6 poles LA5 F210050 (2)	3.750
4-pole	LC1 F1154	4 poles LA5 F115450	0.660
	LC1 F1504	4 poles LA5 F150450	0.660
	LC1 F1854	4 poles LA5 F185450	0.910
	LC1 F2254	4 poles LA5 F225450	1.000
	LC1 F2654	4 poles LA5 F265450	1.220
	LC1 F3304	4 poles LA5 F330450	1.740
	LC1 F4004	4 poles LA5 F400450 (3)	1.740
	LC1 F5004	4 poles LA5 F500450 (3)	2.500
	LC1 F6304	4 poles LA5 F630450 (4)	4.200
	LC1 F7804	1 pole LA5 F780150 (1)	2.100
	LC1 F6304S011	4 poles LA5 F630450	4.200

(1) Comprising 2 identical items per pole.

(2) Comprising three 2-pole arc chambers.

(3) Comprising two 2-pole arc chambers.


(4) Comprising single-pole arc chambers.

References

TeSys contactors

TeSys F contactors

Accessories for assembly of reversing contactors and changeover contactor pairs using 3 contactors, vertically mounted - for customer assembly

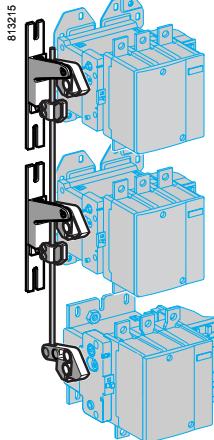

LA9 F4•4

Closing of one of the 3 contactors prevents closing of the other 2.

Mechanical interlock kits

Contactor type (1)			Mechanical interlock (2)	
Top	Middle	Bottom	Kit reference (3)	Weight kg
LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LA9 FF4F4F	0.554
LC1 F185, F225, F1854 or F2254	LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LA9 FG4F4F	0.559
	LC1 F185, F225, F1854 or F2254	LC1 F115, F150, F1154 or F1504	LA9 FG4G4F	0.559
		LC1 F185, F225, F1854 or F2254	LA9 FG4G4G	0.562
LC1 F265, F330, F2654 or F3304	LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LA9 FH4F4F	1.350
	LC1 F185, F225, F1854 or F2254	LC1 F115, F150, F1154 or F1504	LA9 FH4G4F	1.375
		LC1 F185, F225, F1854 or F2254	LA9 FH4G4G	1.375
LC1 F265, F330, F2654 or F3304	LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LA9 FH4H4F	1.524
	LC1 F185, F225, F1854 or F2254	LC1 F185, F225, F1854 or F2254	LA9 FH4H4G	1.527
		LC1 F265, F330, F2654 or F3304	LA9 FH4H4H	1.684
LC1 F400, F4002 or F4004	LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LA9 FJ4F4F	1.421
	LC1 F185, F225, F1854 or F2254	LC1 F115, F150, F1154 or F1504	LA9 FJ4G4F	1.424
		LC1 F185, F225, F1854 or F2254	LA9 FJ4G4G	1.428
LC1 F265, F330, F2654 or F3304	LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LA9 FJ4H4F	1.595
	LC1 F185, F225, F1854 or F2254	LC1 F185, F225, F1854 or F2254	LA9 FJ4H4G	1.598
		LC1 F265, F330, F2654 or F3304	LA9 FJ4H4H	1.755
LC1 F400, F4002 or F4004	LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LA9 FJ4J4F	1.666
	LC1 F185, F225, F1854 or F2254	LC1 F185, F225, F1854 or F2254	LA9 FJ4J4G	1.669
		LC1 F265, F330, F2654 or F3304	LA9 FJ4J4H	1.829
	LC1 F400, F4002 or F4004	LC1 F115, F150, F1154 or F1504	LA9 FJ4J4J	1.890
LC1 F500, F5002 or F5004 (continued on page 5/129)	LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LA9 FK4F4F	1.421
	LC1 F185, F225, F1854 or F2254	LC1 F115, F150, F1154 or F1504	LA9 FK4G4F	1.424
		LC1 F185, F225, F1854 or F2254	LA9 FK4G4G	1.428
LC1 F265, F330, F2654 or F3304	LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LA9 FK4H4F	1.595
	LC1 F185, F225, F1854 or F2254	LC1 F185, F225, F1854 or F2254	LA9 FK4H4G	1.598
		LC1 F265, F330, F2654 or F3304	LA9 FK4H4H	1.755
LC1 F400, F4002 or F4004	LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LA9 FK4J4F	1.666
	LC1 F185, F225, F1854 or F2254	LC1 F185, F225, F1854 or F2254	LA9 FK4J4G	1.669
		LC1 F265, F330, F2654 or F3304	LA9 FK4J4H	1.829
	LC1 F400, F4002 or F4004	LC1 F115, F150, F1154 or F1504	LA9 FK4J4J	1.896
LC1 F500, F5002	LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LA9 FK4K4F	1.666

(1) To order the 3 contactors, see pages 5/114 and 5/115. For auxiliary contact blocks **LAD N02** used for electrical locking, see page 5/123. For accessories, see pages 5/124 to 5/127

(2) Minimum distances between contactors, see page 5/129.

(3) The kit contains the lever arms, the 2 x Ø 8 mm rods and all parts required for assembly.

Selection :
pages 5/194 to 5/217

5/128


Schneider
Electric

References (continued)

TeSys contactors

TeSys F contactors

Accessories for assembly of reversing contactors and changeover contactor pairs using 3 contactors, vertically mounted - for customer assembly

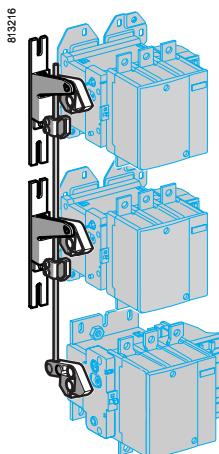

LA9 FK4K4J

Mechanical interlock kits (continued)				
Contactor type (1)			Mechanical interlock (2)	
Top	Middle	Bottom	Kit reference (3)	Weight kg
LC1 F500, F5002 or F5004 (continued)	LC1 F500, F5002 or F5004	LC1 F185, F225, F1854 or F2254	LA9 FK4K4G	1.669
		LC1 F265, F330, F2654 or F3304	LA9 FK4K4H	1.825
		LC1 F400, F4002 or F4004	LA9 FK4K4J	1.896
		LC1-F500, F5002 or F5004	LA9 FK4K4K	1.896
	LC1 F630, F800, F6302 or F6304	LC1 F115, F150, F1154 or F1504	LA9 FL4F4F	1.428
		LC1 F185, F225, F1854 or F2254	LA9 FL4G4F	1.431
		LC1 F185, F225, F1854 or F2254	LA9 FL4G4G	1.436
		LC1 F265, F330, F2654 or F3304	LA9 FL4H4F	1.602
		LC1 F115, F150, F1154 or F1504	LA9 FL4H4G	1.606
		LC1 F185, F225, F1854 or F2254	LA9 FL4H4H	1.751
LC1 F400, F4002 or F4004	LC1 F115, F150, F1154 or F1504	LC1 F115, F150, F1154 or F1504	LA9 FL4J4F	1.673
		LC1 F185, F225, F1854 or F2254	LA9 FL4J4G	1.676
		LC1 F265, F330, F2654 or F3304	LA9 FL4J4H	1.832
		LC1 F400, F4002 or F4004	LA9 FL4J4J	1.903
	LC1-F500, F5002 or F5004	LC1 F115, F150, F1154 or F1504	LA9 FK4K4F	1.666
		LC1 F185, F225, F1854 or F2254	LA9 FK4K4G	1.669
		LC1 F265, F330, F2654 or F3304	LA9 FK4K4H	1.825
		LC1 F400, F4002 or F4004	LA9 FK4K4J	1.896
		LC1-F500, F5002 or F5004	LA9 FK4K4K	1.896
		LC1 F630, F800, F6302 or F6304	LA9 FL4L4F	1.680
(continued)	LC1 F115, F150, F1154 or F1504	LC1 F185, F225, F1854 or F2254	LA9 FL4L4G	1.683
		LC1 F265, F330, F2654 or F3304	LA9 FL4L4H	1.910
		LC1 F400, F4002 or F4004	LA9 FL4L4J	1.896
		LC1 F500, F5002 or F5004	LA9 FL4L4K	1.896
	LC1 F630, F800, F6302, or F6304	LC1 F630, F800, F6302, or F6304	LA9 FL4L4L	1.920

(1) To order the 3 contactors, see pages 5/114 and 5/115. For auxiliary contact blocks **LAD N02** used for electrical locking, see page 5/123. For accessories, see pages 5/124 to 5/127.

(2) Minimum distances between contactors.

This is the distance, in mm, between the centres of two adjacent contactors (between the top and middle contactors or between the middle and bottom contactors).

Contactor Bottom or top	Middle					
	LC1 F115 or F150	LC1 F185 or F225	LC1 F265 or F330	LC1 F400	LC1 F500	LC1 F630 or F800
LC1 F115 or F150	200	210	240	250	270	320
LC1 F185 or F225	210	220	250	250	270	330
LC1 F265 or F330	240	250	250	260	280	350
LC1 F400	250	250	260	260	280	320
LC1 F500	270	270	280	280	300	340
LC1 F630 or F800	320	330	350	320	340	380

(3) The kit contains the lever arms, the 2 x Ø 8 mm rods and all parts required for assembly.

Selection :
pages 5/194 to 5/217


Schneider
Electric

5/129


References

TeSys contactors

TeSys F contactors
a.c. 50/60 Hz supply coils



LX1 FF***



LX1 FG***

5

References

Maximum ambient air temperature: 55 °C. Above this, use an LX9 F coil, see page 5/135.
Operating cycles/hour ($\theta \leq 55^{\circ}\text{C}$): ≤ 2400 .

Control circuit voltage	Average resistance at 20 °C ± 10 %	Inductance of closed circuit	Voltage code	Reference	Weight	
Uc - 50 Hz	Uc - 60 Hz				kg	
For contactors LC1 F115 and LC1 F150						
24	—	0.27	B5	LX1 FF024	0.430	
42	—	0.94	D5	LX1 FF042	0.430	
—	48	0.78	E6	LX1 FF040	0.430	
48	—	1.17	E5	LX1 FF048	0.430	
—	110	4.55	F6	LX1 FF092	0.430	
—	120	4.77	G6	LX1 FF095	0.430	
110	—	6.38	F5	LX1 FF110	0.430	
115	—	6.38	FE5	LX1 FF110	0.430	
127/132	—	9.14	G5	LX1 FF127	0.430	
—	200/208	14.5	L6	LX1 FF162	0.430	
—	220	18.4	M6	LX1 FF184	0.430	
—	240	18.9	U6	LX1 FF187	0.430	
220	265/277	28.1	M5	LX1 FF220	0.430	
230	—	28.1	P5	LX1 FF220	0.430	
240	—	31.1	U5	LX1 FF240	0.430	
—	380	57.2	Q6	LX1 FF316	0.430	
—	440	72.6	R6	LX1 FF360	0.430	
380	460/480	86.9	Q5	LX1 FF380	0.430	
400	—	86.9	V5	LX1 FF380	0.430	
415	—	95.1	N5	LX1 FF415	0.430	
500	—	141	S5	LX1 FF500	0.430	
—	660	172	Y6	LX1 FF550	0.430	
660/690	—	254	Y5	LX1 FF660	0.430	
—	1000	414	48.9	—	LX1 FF850	0.430
1000	—	610	68.5	—	LX1 FF1000	0.430

Specifications

Average consumption at 20°C:

- inrush 50Hz: 550VA; 60Hz: 660 VA,
- sealed 50Hz: 45VA; 60 Hz: 55 VA, $\cos \varphi = 0.3$.

Heat dissipation: 12...16 W.

Operating time at Uc: closing = 23...35 ms, opening = 5...15 ms.

For contactors LC1 F185 and LC1 F225

24	—	0.18	0.03	B5	LX1 FG024	0.550
42	—	0.57	0.09	—	LX1 FG042	0.550
—	48	0.47	0.08	E6	LX1 FG040	0.550
48	—	0.71	0.12	E5	LX1 FG048	0.550
—	110	2.74	0.44	F6	LX1 FG092	0.550
—	115/120	2.87	0.49	G6	LX1 FG095	0.550
110	—	4.18	0.65	F5	LX1 FG110	0.550
115	—	4.18	0.65	FE5	LX1 FG110	0.550
127/132	—	5.35	0.86	G5	LX1 FG127	0.550
—	200/208	8.8	1.41	L6	LX1 FG162	0.550
—	220	11.1	1.8	M6	LX1 FG184	0.550
—	240	11.4	1.87	U6	LX1 FG187	0.550
220	265/277	16.5	2.59	M5	LX1 FG220	0.550
230	—	16.5	2.59	P5	LX1 FG220	0.550
240	—	20.1	3.09	U5	LX1 FG240	0.550
—	380	34	5.32	Q6	LX1 FG316	0.550
—	440	43.5	6.94	R6	LX1 FG360	0.550
380	460/480	51.3	7.75	Q5	LX1 FG380	0.550
400	—	51.3	7.75	V5	LX1 FG380	0.550
415	—	62.3	9.06	N5	LX1 FG415	0.550
500	—	82.7	12.8	S5	LX1 FG500	0.550
—	660	103	15.3	Y6	LX1 FG550	0.550
660/690	—	154	21.8	Y5	LX1 FG660	0.550
—	1000	249	36.6	—	LX1 FG850	0.550
1000	—	370	51.6	—	LX1 FG1000	0.550

Specifications

Average consumption at 20 °C:

- inrush 50 Hz: 805 VA; 60 Hz: 970 VA,
- sealed 50 Hz: 55 VA; 60 Hz: 66 VA, $\cos \varphi=0.3$.

Heat dissipation: 18...24 W.


Operating time at Uc: closing = 20...35 ms, opening = 7...15 ms.

References


TeSys contactors

TeSys F contactors

a.c. 40 to 400 Hz supply coils



LX1 FH***2



LX1 FJ***

References

Low sealed consumption.

Operate on networks with harmonic numbers ≤ 7 .

Operating cycles/hour ($\theta \leq 55^\circ\text{C}$): ≤ 2400 .

Control circuit voltage Uc	Average resistance at $20^\circ\text{C} \pm 10\%$	Inrush	Sealed	Inductance of closed circuit	Voltage code	Reference	Weight kg
For contactors LC1 F265 and LC1 F330							
24	0.8	20	(1)	B7	LX1 FH0242	0.750	
48	2.96	67	(1)	E7	LX1 FH0482	0.750	
110	18.7	440	(1)	F7	LX1 FH1102	0.750	
115	18.7	440	(1)	FE7	LX1 FH1102	0.750	
120/127	22.9	536	(1)	G7	LX1 FH1272	0.750	
200/208	58.4	1366	(1)	L7	LX1 FH2002	0.750	
220	70.6	1578	(1)	M7	LX1 FH2202	0.750	
230	70.6	1578	(1)	P7	LX1 FH2202	0.750	
240	87.94	1968	(1)	U7	LX1 FH2402	0.750	
277	113	2444	(1)	W7	LX1 FH2772	0.750	
380	217	4631	(1)	Q7	LX1 FH3802	0.750	
400	217	4631	(1)	V7	LX1 FH3802	0.750	
415	217	4631	(1)	N7	LX1-FH3802	0.750	
440	265	6731	(1)	R7	LX1 FH4402	0.750	
480/500	329	8543	(1)	S7	LX1 FH5002	0.750	
600/660	296	10 245	(1)	X7	LX1 FH6002	0.750	
1000	696	25 880	(1)	—	LX1 FH10002	0.750	

Specifications

Average consumption at 20°C for 50 or 60 Hz and $\cos \varphi = 0.9$:

- inrush: 600...700 VA,

- sealed: 8...10 VA.

Heat dissipation: 8 W.

Operating time at Uc: closing = 40...65 ms, opening = 100...170 ms.

For contactor LC1 F400

48	1.6	29.5	0.18	E7	LX1 FJ048	1.000
110/120	9.8	230	1.35	F7	LX1 FJ110	1.000
115	9.8	230	1.35	FE7	LX1 FJ110	1.000
120/127	12.8	280	1.75	G7	LX1 FJ127	1.000
200/208	30	815	4.1	L7	LX1 FJ200	1.000
220	37	1030	5.1	M7	LX1 FJ220	1.000
230	37	1030	5.1	P7	LX1 FJ220	1.000
240	47.5	1320	6.4	U7	LX1 FJ240	1.000
265/277	61	1700	8.1	W7	LX1 FJ280	1.000
380	120	3310	15.8	Q7	LX1 FJ380	1.000
400	120	3310	15.8	V7	LX1 FJ380	1.000
415	145	4070	19.4	N7	LX1 FJ415	1.000
440	145	4070	19.4	R7	LX1 FJ415	1.000
500	190	4980	25.5	S7	LX1 FJ500	1.000
550/600	243	6310	27.4	X7	LX1 FJ600	1.000
1000	720	19 420	84.6	—	LX1 FJ1000	1.000

Specifications

Average consumption at 20°C for 50 or 60 Hz and $\cos \varphi = 0.9$:

- inrush: 1000...1150 VA,

- sealed: 12...18 VA.


Heat dissipation: 14 W.

Operating time at Uc: closing = 40...75 ms, opening = 100...170.

(1) Please consult your Regional Sales Office.


References (continued)

TeSys contactors
TeSys F contactors
a.c. 40 to 400 Hz supply coils



LX1 FK***

5



LX1 FL***

References (continued)

Low sealed consumption.
Operate on networks with harmonic numbers ≤ 7 .

Control circuit voltage Uc	Average resistance at 20 °C $\pm 10\%$ Inrush Sealed	Inductance of closed circuit	Voltage code	Reference	Weight	
V	Ω	Ω	H		kg	
For contactor LC1 F500						
48	1.9	33.5	0.19	E7	LX1 FK048	1.150
110/120	9.55	260	1.25	F7	LX1 FK110	1.150
115	9.55	260	1.25	FE7	LX1 FK110	1.150
120/127	11.5	315	1.5	G7	LX1 FK127	1.150
200/208	29	735	3.75	L7	LX1 FK200	1.150
220	35.5	915	4.55	M7	LX1 FK220	1.150
230	35.5	915	4.55	P7	LX1 FK220	1.150
240	44.5	1160	5.75	U7	LX1 FK240	1.150
265/277	56.5	1490	7.3	W7	LX1 FK280	1.150
380	112	2980	14.7	Q7	LX1 FK380	1.150
400	112	2980	14.7	V7	LX1 FK380	1.150
415	143	3730	18.4	N7	LX1 FK415	1.150
440	143	3730	18.4	R7	LX1 FK415	1.150
500	172	4590	22.8	S7	LX1 FK500	1.150
550/600	232	5660	23.9	X7	LX1 FK600	1.150
1000	679	16 960	72	—	LX1 FK1000	1.150

Specifications

Average consumption at 20 °C for 50 or 60 Hz, $\cos \varphi = 0.9$:

- inrush: 1050...1150 VA,

- sealed: 16...20 VA.

Operating cycles/hour ($\theta \leq 55^{\circ}\text{C}$): ≤ 2400 .

Heat dissipation: 18 W.

Operating time at Uc: closing = 40...75 ms, opening = 100...170 ms.

For contactor LC1 F630

48	1.1	17.1	0.09	E7	LX1 FL048	1.500
110/120	6.45	165	1.85	F7	LX1 FL110	1.500
115	6.45	165	1.85	FE7	LX1 FL110	1.500
127	8.1	205	1.05	G7	LX1 FL127	1.500
200/208	20.5	605	2.65	L7	LX1 FL200	1.500
220	25.5	730	3.35	M7	LX1 FL220	1.500
230	25.5	730	3.35	P7	LX1 FL220	1.500
240	25.5	730	3.35	U7	LX1 FL220	1.500
265/277	31	900	4.1	W7	LX1 FL260	1.500
380	78	2360	10.5	Q7	LX1 FL380	1.500
400	78	2360	10.5	V7	LX1 FL380	1.500
415	96	2960	13	N7	LX1 FL415	1.500
440	96	2960	13	R7	LX1 FL415	1.500
500	120	3660	16.5	S7	LX1 FL500	1.500
550/600	155	4560	19.5	X7	LX1 FL600	1.500
1000	474	12 880	56.2	—	LX1 FL1000	1.500

Specifications

Average consumption at 20 °C for 50 or 60 Hz, $\cos \varphi = 0.9$:

- inrush: 1500...1730 VA,

- sealed: 20...25 VA.

Operating cycles/hour ($\theta \leq 55^{\circ}\text{C}$): 1200.

Heat dissipation: 20 W.

Operating time at Uc: closing = 40...80 ms, opening = 100...200 ms.

References (continued)

TeSys contactors

TeSys F contactors
a.c. 40 to 400 Hz supply coils

References (continued)

Low sealed consumption.
Operate on networks with harmonic numbers ≤ 7 .

Control circuit voltage Uc	Average resistance at 20 °C ± 10 %	Inrush	Sealed	Inductance of closed circuit	Voltage code	Reference	Weight
V	Ω	Ω		H			kg
For contactor LC1 F780							
110/120	4.95 (2)	230 (2)	0.21	F7	LX1 FX110 (1)		3.000
115	4.95 (2)	230 (2)	0.21	FE7	LX1 FX110 (1)		3.000
127	6.1 (2)	280 (2)	0.26	G7	LX1 FX127 (1)		3.000
200/208	15.5 (2)	750 (2)	0.66	L7	LX1 FX200 (1)		3.000
220	19.5 (2)	920 (2)	0.82	M7	LX1 FX220 (1)		3.000
230	19.5 (2)	920 (2)	0.82	P7	LX1 FX220 (1)		3.000
240	19.5 (2)	920 (2)	0.82	U7	LX1 FX220 (1)		3.000
265/277	29.8 (2)	1330 (2)	1.25	W7	LX1 FX280 (1)		3.000
380	60.9 (2)	2780 (2)	2.3	Q7	LX1 FX380 (1)		3.000
400	60.9 (2)	2780 (2)	2.3	V7	LX1 FX380 (1)		3.000
415/480	74.3 (2)	3340 (2)	2.8	N7	LX1 FX415 (1)		3.000
440	74.3 (2)	3340 (2)	2.8	R7	LX1 FX415 (1)		3.000
500	92 (2)	4180 (2)	3.5	S7	LX1 FX500 (1)		3.000

Specifications

Average consumption at 20 °C for 50 or 60 Hz, $\cos \varphi = 0.9$:

- inrush: 1900...2300 VA, sealed: 44...55 VA.

Operating cycles/hour ($\theta \leq 55$ °C): 600.

Heat dissipation: 2 x 22 W.

Operating time at Uc: closing = 40...80 ms, opening = 130...230 ms.

For contactor LC1 F800

Control circuit voltage Uc	Voltage code	Rectifier Reference (3)	Coil Reference	Weight
V				kg
110/127	FE7	DR5 TE4U	LX4 F8FW	1.650
220/240	P7	DR5 TE4U	LX4 F8MW	1.650
380/440	V7	DR5 TE4S	LX4 F8QW	1.650

Specifications

Operating cycles/hour ($\theta \leq 55$ °C): 600.

Average consumption at 20 °C for 50 or 60 Hz, $\cos \varphi = 0.8$:

- inrush: 1700 VA, sealed: 12 VA

Operating time at Uc: closing = 60...80 ms, opening = 160...180 ms.

Control circuit voltage Uc	Average resistance at 20 °C ± 10 %	Inrush	Sealed	Inductance of closed circuit	Voltage code	Reference	Weight
V	Ω	Ω		H			kg
For contactors LC1 F1700 and LC1 F2100							
110	5.92	106	0.72	F7	LX1 FK065 (4)		1.150
120	5.92	106	0.72	G7	LX1 FK070 (4)		1.150
220	9.55	260	1.25	M7	LX1 FK110 (4)		1.150
230	9.55	260	1.25	P7	LX1 FK110 (4)		1.150
240	11.5	315	1.50	U7	LX1 FK127 (4)		1.150
277	16.5	420	2.25	W7	LX1 FK140 (4)		1.150
380	29	735	3.75	Q7	LX1 FK200 (4)		1.150
400	29	735	3.75	V7	LX1 FK200 (4)		1.150
415	35.5	915	4.55	N7	LX1 FK220 (4)		1.150
440	35.5	915	4.55	R7	LX1 FK220 (4)		1.150
500	44.5	1160	5.75	S7	LX1 FK240 (4)		1.150

Specifications

Average consumption at 20 °C for 50 or 60 Hz, $\cos \varphi = 0.9$:

- inrush: 1600...2400 VA, sealed: 29...37 VA.

Operating cycles/hour ($\theta \leq 55$ °C): 600.

Heat dissipation: 2 x 18 W.

Operating time at Uc: closing = 40...75 ms, opening = 100...170 ms.

(1) Reference of set of 2 identical coils, to be connected in series.

(2) Value for the 2 coils in series.

(3) Rectifier to be ordered separately: 0.100 kg.

(4) Order 2 coils and connect them in series.

References

TeSys contactors

TeSys F contactors
a.c. 40 to 400 Hz supply coils
for specific applications (1)

References

Low sealed consumption.
High tolerance to inrush voltage drops.
Immune to micro-breaks (mains supply or contact chain).
Operate on networks with harmonic numbers ≤ 7 .

Control circuit voltage Uc	Average resistance at 20 °C $\pm 10\%$ Inrush Sealed	Inductance of closed circuit H	Voltage code	Reference	Weight kg	
For contactors LC1 F115 and LC1 F150						
48	3.03	80.2	0.3	E7	LX9 FF048	0.430
110	14.8	579	2.08	F7	LX9 FF110	0.430
115	14.8	579	2.08	FE7	LX9 FF110	0.430
120/127	19	746	2.65	G7	LX9 FF127	0.430
208	45	1788	5.95	L7	LX9 FF200	0.430
220	59.4	2190	7.7	M7	LX9 FF220	0.430
230	59.4	2190	7.7	P7	LX9 FF220	0.430
240	73.5	2750	9.68	U7	LX9 FF240	0.430
380	173	6540	23	Q7	LX9 FF380	0.430
400	173	6540	23	V7	LX9 FF380	0.430
415	218	8460	30	N7	LX9 FF415	0.430
440	218	8460	30	R7	LX9 FF415	0.430
500	262	10 300	36	S7	LX9 FF500	0.430

Specifications

Average consumption at 20 °C: inrush: 690...855 VA, sealed: 6.6...8.1 VA.

Heat dissipation: 5.9...7.2 W.

Operating cycles/hour ($\theta \leq 55^{\circ}\text{C}$): < 2400.

Operating time at Uc: closing = 35 ms, opening = 130 ms.

For contactors LC1 F185 and LC1 F225

48	2.2	60	0.23	E7	LX9 FG048	0.550
110	10.4	411	1.46	F7	LX9 FG110	0.550
115	10.4	411	1.46	FE7	LX9 FG110	0.550
120/127	13	520	1.85	G7	LX9 FG127	0.550
208	33	1339	4.9	L7	LX9 FG200	0.550
220	42.1	1680	5.84	M7	LX9 FG220	0.550
230	42.1	1680	5.84	P7	LX9 FG220	0.550
240	50.6	2060	7.22	U7	LX9 FG240	0.550
380	128	4730	16.4	Q7	LX9 FG380	0.550
400	128	4730	16.4	V7	LX9 FG380	0.550
415	157	5930	20.6	N7	LX9 FG415	0.550
440	157	5930	20.6	R7	LX9 FG415	0.550
500	194	7550	26.3	S7	LX9 FG500	0.550

Specifications

Average consumption at 20 °C: inrush: 950...1180 VA, sealed: 8.9...10.9 VA.

Heat dissipation: 8.4...9.8 W.

Operating cycles/hour ($\theta \leq 55^{\circ}\text{C}$): < 2400.

Operating time at Uc: closing = 35 ms, opening = 130 ms.

For contactors LC1 F265 and LC1 F330

48	2.96	72	(2)	-	LX9 FH0482	0.750
110/115	18.7	415	(2)	-	LX9 FH1102	0.750
120/127	22.9	156	(2)	-	LX9 FH1272	0.750
220/230	71.6	1621	(2)	-	LX9 FH2202	0.750
240	88	1968	(2)	-	LX9 FH2402	0.750
380/415	222	5075	(2)	-	LX9 FH3802	0.750
500	345	7990	(2)	-	LX9 FH5002	0.750

Specifications

Average consumption at 20 °C: inrush: 560...660 VA, sealed: 8...10 VA.

Heat dissipation: 8.4...10.4 W.


Operating cycles/hour ($\theta \leq 55^{\circ}\text{C}$): < 3600.

Operating time at Uc: closing = 45 ms, opening = 25 ms.

(1) Application examples: hoisting (inching, high operating rates), Main-Standby (unstable mains supplies). These coils are particularly suited for use at higher operating temperatures (mounting in non-ventilated compartments, enclosures, etc.).

(2) Please consult your Regional Sales Office.


813168



LX9 FF***

5

813169



LX9 FG***

References (continued)

TeSys contactors

TeSys F contactors
a.c. 40 to 400 Hz supply coils
for specific applications

References (continued)

Coils with short operating times (at Uc):

- N/O: 60 ms,
- N/C: 50 ms (~ side); 20 ms (-- side).

Coils with high operating rates ($\theta \leq 70^{\circ}\text{C}$):

- 3600 operating cycles/hour,
- 1800 for LC1 F630.

Coils with low inrush consumption.

Control circuit voltage Uc	Average resistance at 20 °C ± 10 % Inrush Sealed	Inductance of closed circuit H	Rectifier Reference (1)	Coil Reference	Weight kg
For contactor LC1 F400					
48	4.03 43	0.22	DR5 TF4V	LX9 FJ917	0.970
110	25.7 246	1.3	DR5 TE4U	LX9 FJ925	0.970
127	32.3 302	1.7	DR5 TE4U	LX9 FJ926	0.970
220/230	99.5 919	5	DR5 TE4U	LX9 FJ931	0.970
380/415	311 3011	15	DR5 TE4S	LX9 FJ936	0.970
440	386 3690	19	DR5 TE4S	LX9 FJ937	0.970
500	478 4380	23	DR5 TE4S	LX9 FJ938	0.970

Specifications

Average consumption:

- inrush: 500 VA,

- sealed: 23 VA

Heat dissipation: 11.4...13.9 W.

For contactor LC1 F500

48	3.73	30.7	0.18	DR5 TF4V	LX9 FK917	1.080
110	24	204	1.1	DR5 TE4U	LX9 FK925	1.080
127	29.8	250	1.4	DR5 TE4U	LX9 FK926	1.080
220/230	89.9	770	4	DR5 TE4U	LX9 FK931	1.080
380/415	274	2075	12	DR5 TE4S	LX9 FK936	1.080
440	361	3060	16	DR5 TE4S	LX9 FK937	1.080
500	448	3750	19	DR5 TE4S	LX9 FK938	1.080

Specifications

Average consumption:

- inrush: 550 VA,

- sealed: 23 VA

Heat dissipation: 15...18.3 W.

For contactor LC1 F630

48	2.81	20.8	0.17	DR5 TF4V	LX9 FL917	1.450
110	13.5	114	0.77	DR5 TE4U	LX9 FL924	1.450
127	20.8	167	1.2	DR5 TE4U	LX9 FL926	1.450
220	52	425	2.9	DR5 TE4U	LX9 FL930	1.450
220/240	64.5	518	3.6	DR5 TE4U	LX9 FL931	1.450
380/400	163	1360	8.8	DR5 TE4S	LX9 FL935	1.450
415/440	204	1670	11	DR5 TE4S	LX9 FL936	1.450
500	312	2510	17	DR5 TE4S	LX9 FL938	1.450

Specifications

Average consumption:


- inrush: 830 VA,

- sealed: 47 VA

Heat dissipation: 22.8...27.8 W.


(1) Rectifier to be ordered separately: 0.100 kg.

813190




LX9 FJ•••

813191



LX9 FK•••

813191



LX9 FL•••

5

References

TeSys contactors TeSys F contactors d.c. supply coils

References

Low sealed consumption.
Operating cycles/hour ($\theta \leq 55^\circ\text{C}$): ≤ 2400 .

Control circuit voltage Uc	Average resistance at 20 °C ± 10 % Inrush Sealed	Inductance of closed circuit	Voltage code	Reference	Weight	
V	Ω	Ω	H		kg	
For contactors LC1 F115 and LC1 F150						
24	1.12	177	11	BD	LX4 FF024	0.430
48	4.52	715	42.7	ED	LX4 FF048	0.430
110	21.7	2940	179	FD	LX4 FF110	0.430
125	26.8	3560	223	GD	LX4 FF125	0.430
220/230	84	11 100	704	MD	LX4 FF220	0.430
250	105	13 000	868	UD	LX4 FF250	0.430
440/460	301	48 200	4000	RD	LX4 FF440	0.430

Specifications

Average consumption:

- inrush: 543...665 W,
- sealed: 3.94...4.83 W.

Operating time at Uc: closing = 30...40 ms, opening = 30...50 ms.

For contactors LC1 F185 and LC1 F225

24	0.79	169	14.9	BD	LX4 FG024	0.550
48	3.2	662	55.3	ED	LX4 FG048	0.550
110	14.9	2810	241	FD	LX4 FG110	0.550
125	19	3320	289	GD	LX4 FG125	0.550
220/230	57.7	10 200	890	MD	LX4 FG220	0.550
250	76	12 400	1140	UD	LX4 FG250	0.550
440/460	223	39 700	4210	RD	LX4 FG440	0.550

Specifications

Average consumption:

- inrush: 737...902 W,
- sealed: 4.13...5.07 W.

Operating time at Uc: closing = 30...40 ms, opening = 30...50 ms.

For contactors LC1 F265 and LC1 F330

24	0.9	192	26.3	BD	LX4 FH024	0.740
48	3.49	707	92.9	ED	LX4 FH048	0.740
110	16.8	3180	424	FD	LX4 FH110	0.740
125	20.8	3840	530	GD	LX4 FH125	0.740
220/230	65.7	11 500	1590	MD	LX4 FH220	0.740
250	84	13 900	1910	UD	LX4 FH250	0.740
440/460	255	44 000	7570	RD	LX4 FH440	0.740

Specifications

Average consumption:

- inrush: 655...803 W,
- sealed: 3.68...4.53 W.

Operating time at Uc: closing = 40...50 ms, opening = 40...65 ms.

For contactor LC1 F400

48	2.5	558	56	ED	LX4 FJ048	0.970
110	12.7	2660	270	FD	LX4 FJ110	0.970
125	15.8	3130	330	GD	LX4 FJ125	0.970
220	47	8820	910	MD	LX4 FJ220	0.970
250	61	10 500	1200	UD	LX4 FJ250	0.970
440	236	33 750	4435	RD	LX4 FJ440	0.970


Specifications

Average consumption:

- inrush: 920...1140 W,
- sealed: 4...7.5 W.

Operating time at Uc: closing = 50...60 ms, opening = 45...60 ms.


813193



LX4 FF***

5

813192




LX4 FH***

5/136

Schneider
Electric

References (continued)

TeSys contactors
TeSys F contactors
d.c. supply coils



LX4 FK***

References (continued)

Low sealed consumption.

Control circuit voltage Uc	Average resistance at 20 °C ± 10 %		Inductance of closed circuit H	Voltage code	Reference	Weight kg
	Inrush	Sealed				
For contactor LC1 F500						
48	2.35	515	67	ED	LX4 FK048	1.080
110	11.5	2450	280	FD	LX4 FK110	1.080
125	15	2930	400	GD	LX4 FK125	1.080
220	44	8150	1080	MD	LX4 FK220	1.080
250	56	9650	1350	UD	LX4 FK250	1.080
440	225	31 300	5270	RD	LX4 FK440	1.080

Specifications

Average consumption:

- inrush: 990...1220 W,
- sealed: 4.54...8 W.

Operating cycles/hour ($\theta \leq 55^{\circ}\text{C}$): 2400.

Operating time at Uc: closing = 50...60 ms, opening = 45...60 ms.

For contactor LC1 F630

48	1.7	353	40.5	ED	LX4 FL048	1.450
110	8.1	1680	180	FD	LX4 FL110	1.450
125	10	2110	230	GD	LX4 FL125	1.450
220	31	5160	650	MD	LX4 FL220	1.450
250	38	6080	815	UD	LX4 FL250	1.450
440	152	23 120	2910	RD	LX4 FL440	1.450

Specifications

Average consumption:

- inrush: 1420...1920 W,
- sealed: 6.5...12.5 W.

Operating cycles/hour ($\theta \leq 55^{\circ}\text{C}$): 1200.

Operating time at Uc: closing = 60...70 ms, opening = 40...50 ms.

For contactor LC1 F780

110	6.1 (2)	280 (2)	0.26	FD	LX4 FX110 (1)	3.000
125	7.7 (2)	410 (2)	0.33	GD	LX4 FX125 (1)	3.000
220	24.6 (2)	1100 (2)	1	MD	LX4 FX220 (1)	3.000
250	29.8 (2)	1330 (2)	1.25	UD	LX4 FX250 (1)	3.000
440	92 (2)	4180 (2)	3.5	RD	LX4 FX440 (1)	3.000

Specifications

Average consumption:

- inrush: 1960...2420 W,
- sealed: 42...52 W.

Operating cycles/hour ($\theta \leq 55^{\circ}\text{C}$): 600.

Operating time at Uc: closing = 70...80 ms, opening = 100...130 ms.

For contactor LC1 F800

110/120	—	—	—	FW	LX4 F8FW	1.650
220/240	—	—	—	MW	LX4 F8MW	1.650
380/400	—	—	—	QW	LX4 F8QW	1.650

Specifications

Heat dissipation: 25 W.

Operating time at Uc: closing = 60...80 ms, opening = 40...50 ms.

For contactors LC1 F1700 and LC1 F2100

110	2.94	734	98	FD	LX4 FK055 (3)	1.080
125	3.73	916	122	GD	LX4 FK065 (3)	1.080
220	11.5	2450	280	MD	LX4 FK110 (3)	1.080
250	15	2930	400	UD	LX4 FK125 (3)	1.080
440	44	8150	1080	RD	LX4 FK220 (3)	1.080

Specifications

Average consumption:

- inrush: 2000...2200 W,
- sealed: 8...10 W.

Operating cycles/hour ($\theta \leq 55^{\circ}\text{C}$): 600.

Operating time at Uc: closing = 50...60 ms, opening = 45...60 ms.

(1) Reference of set of 2 identical coils, to be connected in series.

(2) Value for the 2 coils in series.

(3) Order 2 coils and connect them in series.

References

TeSys contactors

TeSys F contactors
d.c. supply coils
for specific applications

References

Coils with short operating times (at Uc) :
 - N/O: 60 ms,
 - N/C: 20 ms.

Coils with high operating rates ($q \leq 70^{\circ}\text{C}$):
 - 3600 operating cycles/hour,
 - 1800 for LC1 F630.

Coils with low inrush consumption.

Control circuit voltage Uc	Average resistance at 20 °C ± 10 % Inrush	Average resistance at 20 °C ± 10 % Sealed	Inductance of closed circuit H	Resistor (1) Qty required	Reference	Coil Reference	Weight kg
For contactor LC1 F400							
48	5.11	99	0.27	1	DR2 SC0047	LX9 FJ918	0.970
110	32.3	632	1.7	1	DR2 SC0330	LX9 FJ926	0.970
125	39.4	760	2	1	DR2 SC0390	LX9 FJ927	0.970
220	123	2320	6.1	1	DR2 SC1200	LX9 FJ932	0.970
440/460	478	9080	23	1	DR2 SC4700	LX9 FJ938	0.970

Specifications

Average consumption:
 - inrush: 430 W,
 - sealed: 22 W.

For contactor LC1 F500

48	4.67	76.7	0.22	1	DR2 SC0039	LX9 FK918	1.080
110	29.8	470	1.4	1	DR2 SC0220	LX9 FK926	1.080
125	37.4	637	1.7	1	DR2 SC0330	LX9 FK927	1.080
220	115	1935	5.1	1	DR2 SC1000	LX9 FK932	1.080
440/460	448	7050	19	1	DR2 SC3300	LX9 FK938	1.080

Specifications

Average consumption:
 - inrush: 470 W.
 - sealed: 29 W.

For contactor LC1 F630


48	3.43	52.9	0.20	2	DR2 SC0047	LX9 FL918	1.450
110	17.2	272	0.98	2	DR2 SC0270	LX9 FL925	1.450
125	20.8	333	1.2	2	DR2 SC0330	LX9 FL926	1.450
220	64.5	1018	3.6	2	DR2 SC1000	LX9 FL931	1.450
440/460	260	4010	14	2	DR2 SC3900	LX9 FL937	1.450

Specifications

Average consumption:
 - inrush: 733 W.
 - sealed: 48 W.


(1) Resistor to be ordered separately, weight of resistor: 0.030 kg.

813194




LX9 FJ***

813196



LX9 FK***

813195



LX9 FL***

5

Schneider
Electric


5/138

References (continued)


TeSys contactors

TeSys F contactors

Wide range d.c. supply coils
for specific applications



LX4 FF***



LX4 FH***

References (continued)

Wide range coils: 0.7...1.25 Uc.

Operating cycles/hour: ≤ 60 (1).

Ambient temperature (operation): - 55 to + 70 °C.

Control circuit voltage Uc	Inrush	Average resistance at 20 °C ± 10 %	Sealed	Inductance of closed circuit H	Reference	Weight kg
For contactors LC1 F115 and LC1 F150						
24	0.71	120	7.4	LX4 FF020	0.430	
48	2.86	392	27	LX4 FF040	0.430	
72	7.05	1055	66	LX4 FF060	0.430	
110	13.2	1970	121	LX4 FF090	0.430	
125	16.9	2340	149	LX4 FF100	0.430	

Specifications

Average consumption:

- inrush: 415...1300 W,

- sealed: 3.1...9 W.

For contactors LC1 F185 and LC1 F225

24	0.52	112	9.3	LX4 FG020	0.550
48	2	359	34.4	LX4 FG040	0.550
72	5.07	984	85	LX4 FG060	0.550
110	9.66	1840	157	LX4 FG090	0.550
125	12	2230	196	LX4 FG100	0.550

Specifications

Average consumption:

- inrush: 580...1820 W,

- sealed: 3.1...9.5 W.

For contactors LC1 F265 and LC1 F330

24	0.58	129	17.3	LX4 FH020	0.740
48	2.19	400	59.5	LX4 FH040	0.740
72	5.58	1110	149	LX4 FH060	0.740
110	11	2120	287	LX4 FH090	0.740
125	13.8	2520	353	LX4 FH100	0.740

Specifications

Average consumption:

- inrush: 515...1600 W,

- sealed: 2.7...8.5 W.

Operational voltage at 20 °C ± 10 %	Average resistance	Inductance of closed circuit	Coil Reference	Economy resistor Resistors in // No. Ω	Reference of the assembly (2)	Weight kg
V	Ω	H				
For contactor LC1 F400						
24	1.05	0.049	LX2 FJW11 3 56	DR2 SC0056	LX5 FJW11	0.970
48	4.8	0.22	LX2 FJW18 3 220	DR2 SC0220	LX5 FJW18	0.970
72	9.6	0.44	LX2 FJW21 3 470	DR2 SC0470	LX5 FJW21	0.970

Specifications

Average consumption:

- inrush: 290...860 W,

- sealed: 16...47 W.


(1) The mechanical durability of the contactor is limited to 1 million operating cycles.

(2) The set comprises: 1 coil LX2 FJ and 3 resistors DR2 SC.

Dimensions

TeSys contactors TeSys F contactors

LC1 F115 to F330

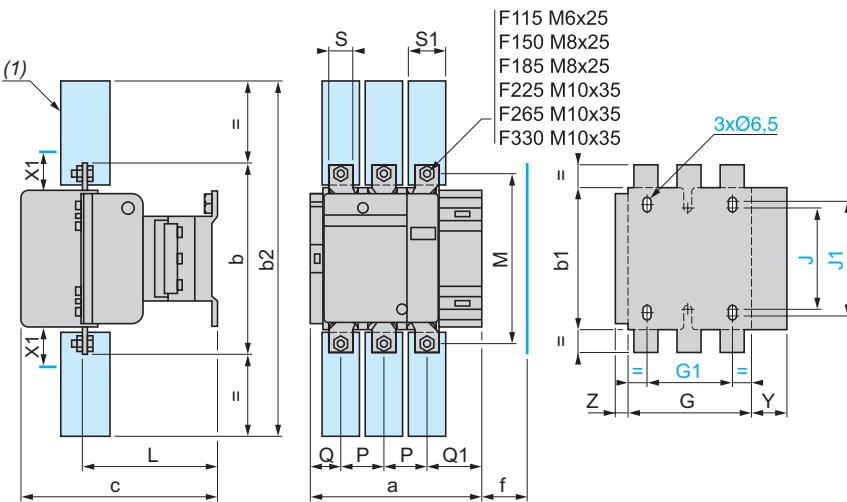

X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.


LC1	200...500 V	600...1000 V
F115	10	15
3P	200.5	200.5
4P	163.5	163.5
F150	10	15
3P	200.5	200.5
4P	163.5	163.5
F185	10	15
3P	208.5	208.5
4P	168.5	168.5
F225	10	15
3P	208.5	208.5
4P	168.5	168.5
F265	10	15
3P	244.5	244.5
4P	201.5	201.5
F330	10	15
3P	261	261
4P	213	213

(1) Power terminal protection shroud (see page 5/126).

LC1	a	b	b1	b2	c	f	G	G1	J	J1	L	M	P	Q	Q1	S	S1	Y	Z
F115	163.5	162	137	265	171	131	106	80	106	120	107	147	37	29.5	60	20	26	44	13.5
3P	200.5	162	137	265	171	131	143	80	106	120	107	147	37	29.5	60	20	26	44	13.5
F150	163.5	170	137	301	171	131	106	80	106	120	107	150	40	26	57.5	20	34	44	13.5
3P	200.5	170	137	301	171	131	143	80	106	120	107	150	40	26	55.5	20	34	44	13.5
F185	168.5	174	137	305	181	130	111	80	106	120	113.5	154	40	29	59.5	20	34	44	13.5
3P	208.5	174	137	305	181	130	151	80	106	120	113.5	154	40	29	59.5	20	34	44	13.5
F225	168.5	197	137	364	181	130	111	80	106	120	113.5	172	48	21	51.5	25	44.5	44	13.5
3P	208.5	197	137	364	181	130	151	80	106	120	113.5	172	48	17	47.5	25	44.5	44	13.5
F265	201.5	203	145	375	213	147	142	96	106	120	141	178	48	39	66.5	25	44.5	38	21.5
3P	244.5	203	145	375	213	147	190	96	106	120	141	178	48	34	66.5	25	44.5	38	21.5
F330	213	206	145	375	219	147	154.5	96	106	120	145	181	48	43	74	25	44.5	38	20.5
3P	261	206	145	375	219	147	202.5	96	106	120	145	181	48	43	74	25	44.5	38	20.5

f = minimum distance required for coil removal.

LC1 F400 and F500

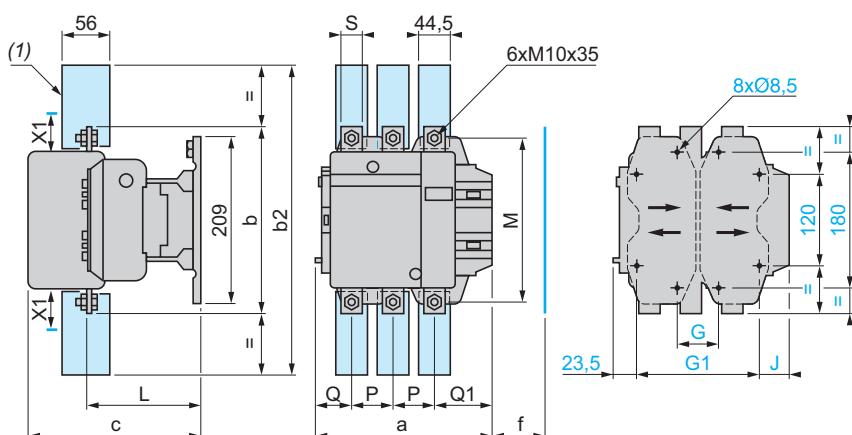

X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

LC1	200...500 V	600...1000 V
F400	15	20
2P	213	213
3P	238	238
4P	288	288
F500	15	20
2P	233	233
3P	238	238
4P	238	238

(1) Power terminal protection shroud (see page 5/126).

LC1	a	b	b2	c	f	G supplied min.	G max.	G1 supplied min.	G1 max.	J	L	M	P	Q	Q1	S		
F400	213	206	375	219	146	80	66	102	170	156	192	19.5	145	181	48	69	96	25
2P	213	206	375	219	146	80	66	102	170	156	192	19.5	145	181	48	43	74	25
3P	261	206	375	219	146	80	66	150	170	156	240	67.5	145	181	48	43	74	25
F500	233	238	400	232	150	80	66	120	170	156	210	39.5	146	208	55	76	102	30
2P	233	238	400	232	150	80	66	120	170	156	210	39.5	146	208	55	46	77	30
3P	288	238	400	232	150	140	66	175	230	156	265	34.5	146	208	55	46	77	30

f = minimum distance required for coil removal.

Selection :
pages 5/194 to 5/217

Characteristics :
pages 5/106 to 5/113


References :
pages 5/114 to 5/117

Schemes :
page 5/146

Dimensions (continued)

TeSys contactors
TeSys F contactors

LC1 F630 and F800

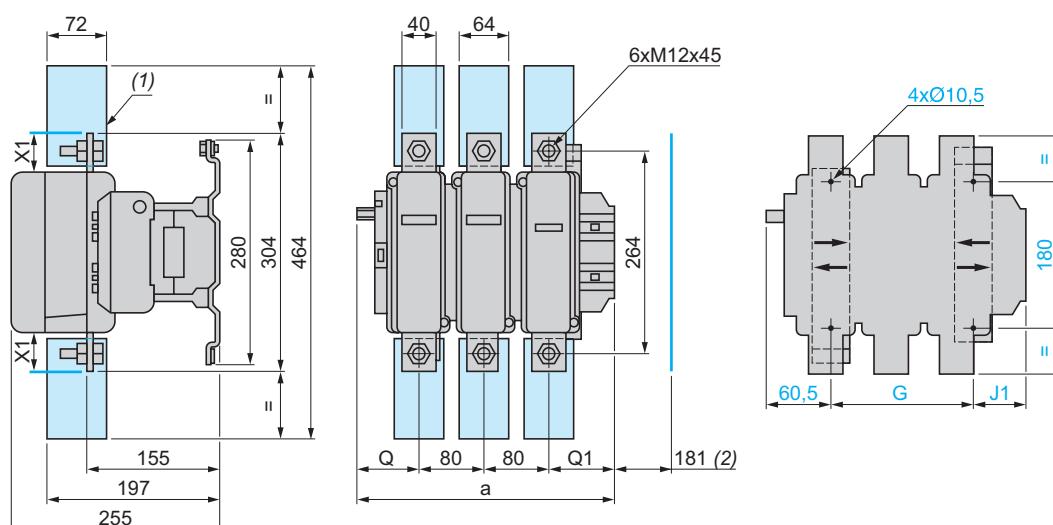

X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

Voltage 200...500 V 690...1000 V 200...690 V 1000 V

LC1	a	G supplied min.	G max.	J1	Q	Q1
F630	2P	309	180	100	195	68,5
F630, F800	3P	309	180	100	195	68,5
F630	4P	389	240	150	275	68,5


LC1 F630 20 30 - -

LC1 F800 - - 10 20

(1) Power terminal protection shroud (see page 5/126).

(2) Minimum distance required for coil removal.

LC1 F780


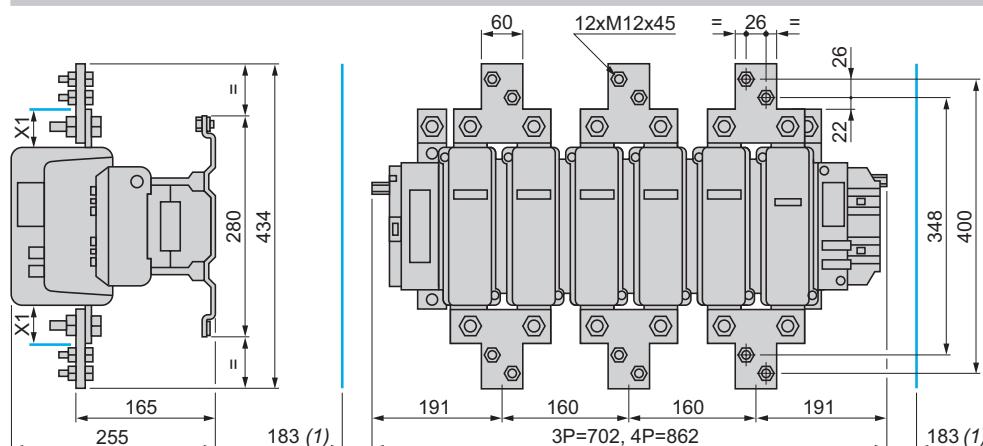


X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

Voltage 200...500 V 690...1000 V

X1 (mm) 30 35

Fixing centres of LC1 F780

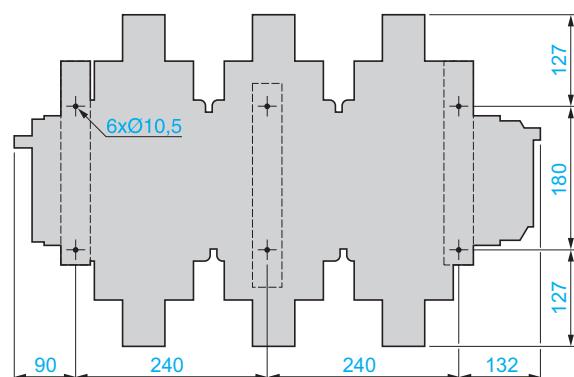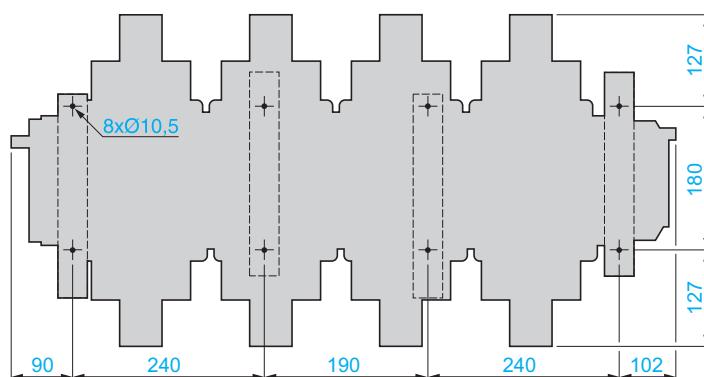

Selection : pages 5/194 to 5/217

Characteristics : pages 5/106 to 5/113

References : pages 5/114 to 5/117

Schemes : page 5/146



Schneider
Electric

5/141

Dimensions

TeSys contactors TeSys F contactors

LC1 F1700 and LC1 F2100

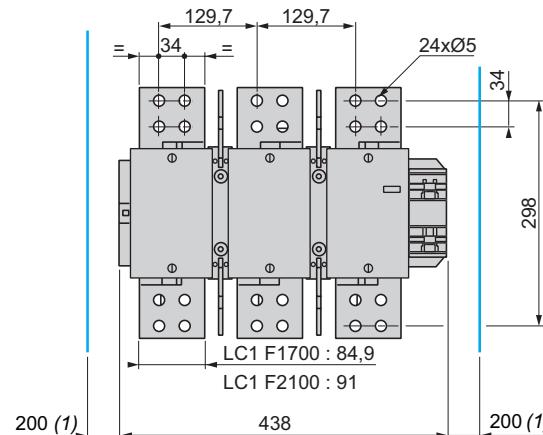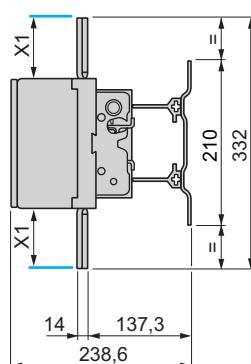


X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

Voltage	200...500 V	690...1000 V
X1 (mm)	90	100

(1) Minimum distance required for coil removal.

Fixing centres of LC1 F1700 and 2100

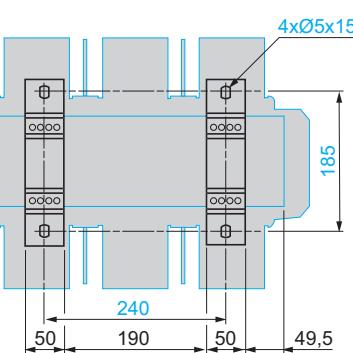

5

Selection :
pages 5/194 to 5/217

Characteristics :
pages 5/106 to 5/113

References :
pages 5/114 to 5/117

Schemes :
page 5/146

5/142

Schneider
Electric


Dimensions

TeSys contactors

TeSys F contactors


Accessories

Right-angled connectors LA9 F•981 (set of 3) for rear connection

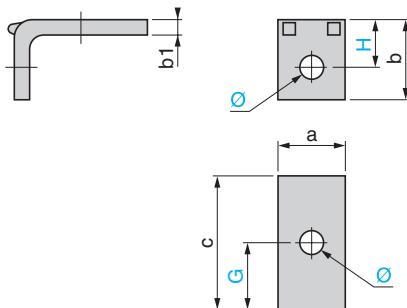


LA9	FF981	FG981	FJ981	FK981	FL981
a	15	20	25	30	40
b	18	23	29	35	48
b1	3	3	4	5	8
c	42	45	55	52	86
G	24	26	32.5	26	45
H	10.5	13	16.5	20	28
Ø	6.5	9	11	11	13

Right-angled connectors LA9 F•979 (set of 3) for side connection

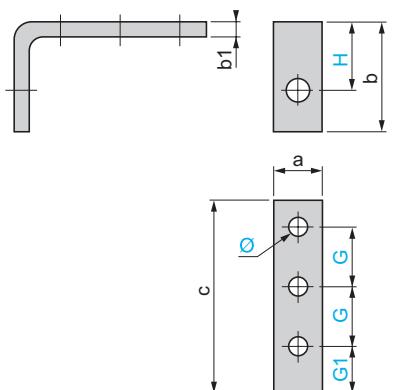


LA9	FF979	FG979	FJ979	FK979	FL979
a	15	20	25	30	40
b	54	58	63.5	68	117
b1	5	5	6	6	10
c	80	92	120	120	130
G	24	28	37	37	37.5
G1	20	22	29	29	35
H	36	39	41	42	76
Ø	6.5	9	11	11	13

Right-angled connectors LA9 F•980 with large surface area (set of 3)

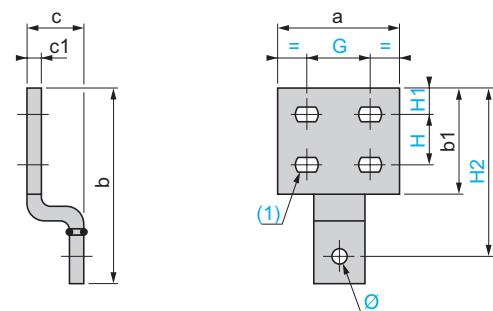

LA9	FF980	FG980	FJ980	FK980	FL980
a	35	40	50	60	100
b	70.5	82.5	98.5	114	154
b1	40	45	55	65	85
c	29	29	33	33	43
c1	3	3	5	5	10
G	18	20	25	29	53
H	18	20	22	26	40
H1	10	12	14	17	20
H2	60.5	72.5	84.5	97	132
Ø	6.5	9	11	11	13
(1)	Ø 7 x 10	Ø 9 x 12	Ø 11 x 14	Ø 12.5 x 15	Ø 12.5 x 15

Right-angled connectors LA9 F2100 (set of 6) for rear connection

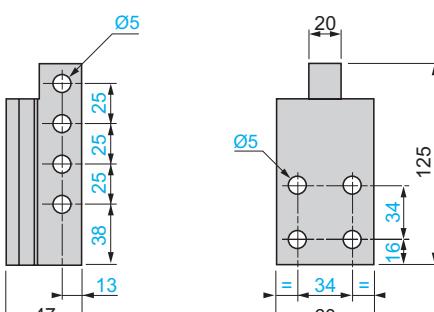


Dimensions (continued)


TeSys contactors
TeSys F contactors
Accessories

Paralleling links (set of 4)

LA9 FF602, FG602, FH602




LA9 FK602, FL602



	LA9	FF602	FG602	FH602	FK602	FL602
a	25	30	40	50	60	
b	45	55	60	85	100	
b1	30	35	40	55	65	
c	4	5	8	10	10	
G	—	—	—	22	26	
H	37.5	45	52.5	70	85	
H1	12.5	15	15	14	17	
H2	—	—	—	22	26	
Ø1	6.5	9	11	11	13	
Ø2	11	11	13	11	14	

Links for "star" connection of 3 poles

LA9 F•601

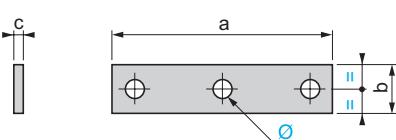


	LA9	FF601	FG601	FH601	FK601	FL601
a	69	100	121	140	200	
b	15	20	20	30	40	
c	3	3	5	5	8	
Ø	6.5 x 8.5	8.5 x 10.5	10.5 x 13	11	13	

Mounting

TeSys contactors TeSys F contactors

LC1 F115 to F330

On panel

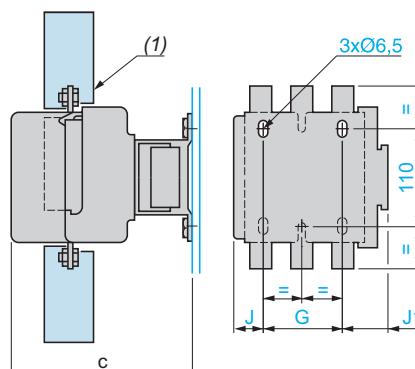

On pre-slotted mounting plate AM1 PA, PB, PC

On rails DZ5 MB on 120 mm centres


LC1	F115 F150	F185 F225	F265	F330
c (2) 3P	171	181	213	219
4P	171	181	213	219
G 3P	80	80	96	96
4P	80	80	96	96
J 3P	26.5	29	44.5	44.5
4P	45	49	68.5	68.5
J1 3P	57	59.5	61.5	61.5
4P	75.5	79.5	85.5	85.5

LC1	F115 F150	F185 F225	F265	F330
c (2) 3P	171	181	213	219
4P	171	181	213	219

LC1	F115 F150	F185 F225	F265	F330
c (2) 3P	171	181	213	219
4P	171	181	213	219


LC1 F

On 2 notched rails AM1 EC***

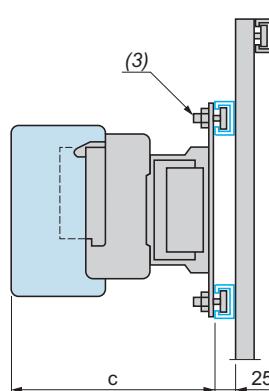

LC1 F115 to F330

LC1 F400 to F800

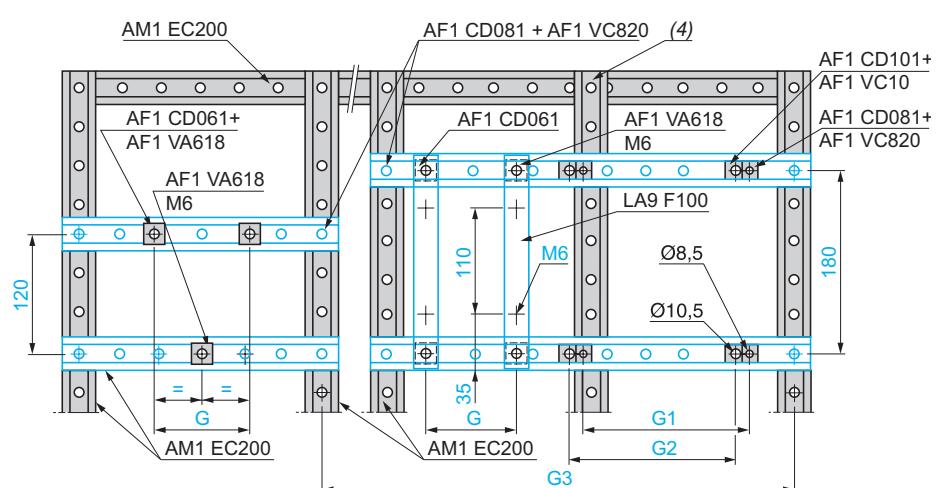

LC1	F115, F150	F185, F225	F265	F330	F400	F500	F630	F780	F800
c 3P	165 (5)	176	207	213	219	232	255	255	255
4P	165 (5)	176	207	213	219	232	255	255	-
G (M6) 3P	80	80	96	96	-	-	-	-	-
4P	80	80	96	96	-	-	-	-	-
G1 (Ø 8.5) 3P	-	-	-	-	80	80	-	-	-
4P	-	-	-	-	80	140	-	-	-
G2 (Ø 10.5) 3P	-	-	-	-	-	-	180	See page 5/141	180
4P	-	-	-	-	-	-	240	-	-

(1) Power terminal protection shroud (see page 5/126).

(2) See X1 (minimum electrical clearance) pages 5/140 and 5/141.

(3) AF1 CD*** and AF1 VA***.

(4) This AM1 EC200 upright is required when G2 or G3 is greater than 700 mm (please consult your Regional Sales Office).

(5) + 6 mm with time-delay block on LC1 F.

Schemes


TeSys contactors

TeSys F contactors


Contactors

2, 3 and 4-pole contactors


LC1 F115 to F630
(coil LX1 F ~)




LC1 F115 to F630 (coil LX4 F ---)
LC1 F115 to F265 (coil LX9 F ~)
LC1 F800 (coil LX8 F ~/---)



LC1 F780 ~ or ---




LC1 F1700 ~ or ---
LC1 F2100 ~ or ---




Coils

Standard ~ coils


LX1 FF, FG, FJ...FL
LX1 FH0422...FH3802



LX1 FH0202...FH0362
LX1 FH4402...FH10002
LX1 F8•




LX1 FX
Rectifier supplied and fixed on the contactor



Standard --- coils

LX4 FF, FG, FH, FJ, FK, FL, FX (1), LX4 F8•




(1) 2 coils in series.


5

Special ~ coils


LX9 FF, FG




LX9 FH•••2



LX9 FJ, FK, FL



LX4 F8•



(1) Breaking on ~ side.

Drop-out time 50 ms.

(2) Breaking on --- side.

Drop-out time 20 ms.

Selection :
pages 5/194 to 5/217

Characteristics :
pages 5/106 to 5/113

References :
pages 5/114 to 5/117

Dimensions :
pages 5/140 to 5/142

5/146

Schneider
Electric

Schemes (continued)

TeSys contactors
TeSys F contactors

Add-on blocks

Instantaneous auxiliary contacts

1 N/O LAD N10 (1)



1 N/C LAD N01 (1)



1 N/O + 1 N/C LAD N11




2 N/O LAD N20




2 N/C LAD N02




2 N/O + 2 N/C LAD N22




1 N/O + 3 N/C LAD N13




4 N/O LAD N40




4 N/C LAD N04



2 N/O + 2 N/C (2) LAD C22



3 N/O + 1 N/C LAD N31




(1) Items in brackets: See "TeSys D contactors".

(2) 1 N/O + 1 N/C make before break.

Instantaneous auxiliary contacts with terminal referencing conforming to standard EN 50012 (References: pages 5/122 and 5/123)


1 N/O + 1 N/C

LAD N11P




1 N/O + 1 N/C

LAD N11G




2 N/O + 2 N/C

LAD N22P



2 N/O + 2 N/C

LAD N22G



Dust and damp protected instantaneous auxiliary contacts


2 N/O (24-50 V)

LA1 DX20




2 N/O (5-24 V)

LA1 DY20




2 N/O protected (24-50 V) + 2 N/O standard

LA1 DZ40



2 N/O protected (24-50 V) + 1 N/O + 1 N/C standard

LA1 DZ31




5

Time delay auxiliary contacts

On-delay 1 N/O +1 N/C LAD T•



Off-delay 1 N/O + 1 N/C LAD R•



On-delay 1 N/C + 1 N/O break before make LAD S•



Selection :
pages 5/194 to 5/217

Characteristics :
pages 5/106 to 5/113

References :
page 5/123

Schneider
Electric

5/147


Dimensions

TeSys contactors


TeSys F reversing contactors and changeover contactor pairs
Horizontally mounted

Pre-assembled

LC2 F115 to F265 (reverser supplied on 2 bars which can be used for fixing the device)

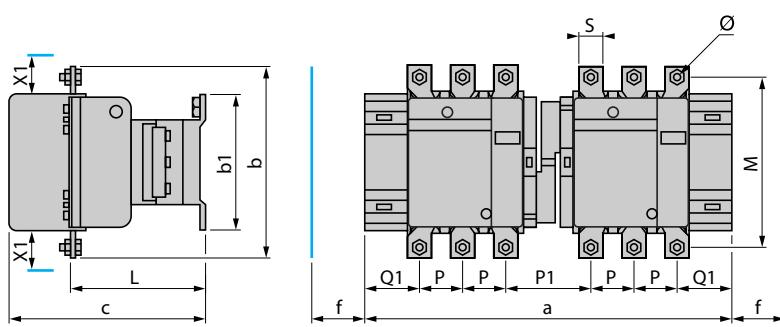

f - Minimum distance required for coil removal.

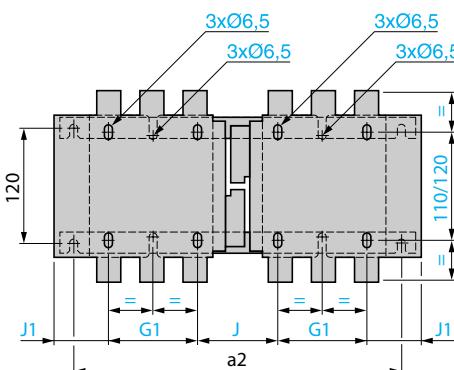

Bar fixing centres
Vertical: 120 mm
Horizontal: a2 see table

X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

LC1	200...500 V	660...1000 V
F115, F150	10	15
F185	10	15
F225, F265	10	15

LC2	a	a2	b	b1	c	G1	J	J1	L	M	P	P1	Q1	S	f	Ø
F115	3P	345	317	162	137	171	80	71	57	107	147	37	77	60	20	131 M6
	4P	419	378	162	137	171	80	108	75.5	107	147	37	77	60	20	131 M6
F150	3P	345	317	170	137	171	80	71	57	107	150	40	71	57	20	131 M8
	4P	422	381	170	137	171	80	111	75.5	107	150	40	71	55.5	20	131 M8
F185	3P	357	326	174	137	181	80	78	59.5	113.5	154	40	78	59.5	20	130 M8
	4P	437	390	174	137	181	80	118	79.5	113.5	154	40	78	59.5	20	130 M8
F225	3P	357	326	197	137	181	80	78	59.5	113.5	172	48	62	51.5	25	130 M10
	4P	437	390	197	137	181	80	118	79.5	113.5	172	48	54	47.5	25	130 M10
F265	3P	425	386	203	145	213	96	109	61.5	141	178	48	100	66.5	25	147 M10
	4P	521	464	203	145	213	96	157	85.5	141	178	48	100	66.5	25	147 M10

Dimensions (continued)


TeSys contactors

TeSys F reversing contactors and changeover
contactor pairs
Horizontally mounted

For customer assembly, fixing recommended on AM1 EC uprights, please consult your Regional Sales Office.

2 x LC1 F115 to F330

2 x LC1 F400, F500, F630, F800

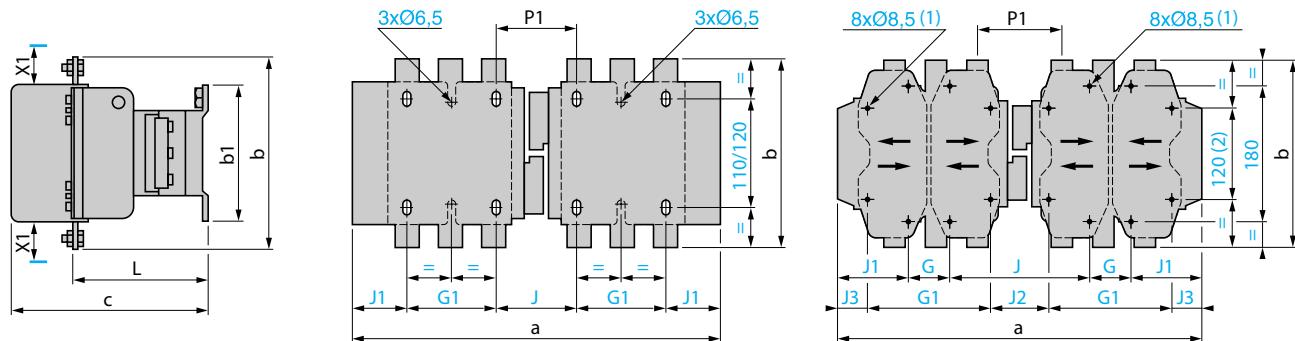

X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

LC1	200...500 V	660...1000 V	200...690 V	1000 V
F115, F150	10	15	—	—
F185	10	15	—	—
F225, F265	10	15	—	—
F330	10	15	—	—
F400	15	20	—	—
F500	15	20	—	—
F630	20	30	—	—
F800	—	—	10	20

2 x LC1	a	b	b1	c	G	G1	J	J1	J2	J3	L	P1
F115	3P 345	162	137	171	—	80	71	57	—	—	107	77
	4P 419	162	137	171	—	80	108	75.5	—	—	107	77
F150	3P 345	170	137	171	—	80	71	57	—	—	107	71
	4P 422	170	137	171	—	80	111	75.5	—	—	107	71
F185	3P 357	174	137	181	—	80	78	59.5	—	—	113.5	78
	4P 437	174	137	181	—	80	118	79.5	—	—	113.5	78
F225	3P 357	197	137	181	—	80	78	59.5	—	—	113.5	62
	4P 437	197	137	181	—	80	118	79.5	—	—	113.5	54
F265	3P 425	203	145	213	—	96	109	61.5	—	—	141	100
	4P 521	203	145	213	—	96	157	85.5	—	—	141	100
F330	3P 447	206	145	219	—	96	124	65.5	—	—	145	107
	4P 543	206	145	219	—	96	172	89.5	—	—	145	107
F400	3P 446	206	209	219	80	170	157	64.5	67	19.5	145	107
	4P 542	206	209	219	80	170	157	112.5	67	67.5	145	107
F500	3P 485	238	209	232	80	170	156	84.5	66	39.5	146	112
	4P 595	238	209	232	140	230	156	79.5	66	34.5	146	112
F630	3P 636	304	280	255	180	—	139	68.5	—	—	155	137
	4P 796	304	280	255	240	—	139	88.5	—	—	155	137
F800	3P 636	304	280	255	180	—	139	68.5	—	—	155	137

(1) Except LC1 F630 and F800 : 4 x Ø 10.5.

(2) Except LC1 F630 and F800.

For other dimensions: see pages 5/140 and 5/141.

5

Selection :
pages 5/194 to 5/217

References :
pages 5/116 to 5/121

Schemes :
page 5/151

Schneider
Electric

5/149


Dimensions

TeSys contactors

TeSys F reversing contactors and changeover contactor pairs
Vertically mounted

For customer assembly, with mechanical interlock (MI) LA9 F, fixing recommended on AM1 EC uprights (please consult your Regional Sales Office).
2 x LC1 identical or different ratings (LC1 F115 to F630 and F800). See pages 5/118 to 5/121

Assembly A

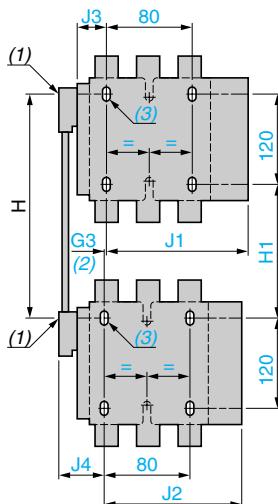


(1) Mechanical interlock shaft.

(2) For assembly of contactors of different ratings only.

(3) 4 x Ø 0.65 for LC1 F115 to F225.


Assembly B

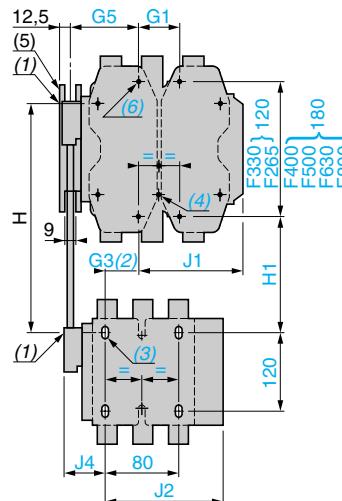

(4) 4 x Ø 0.65 for LC1 F265.

(5) Mechanical interlock guide bracket.

Assembly C

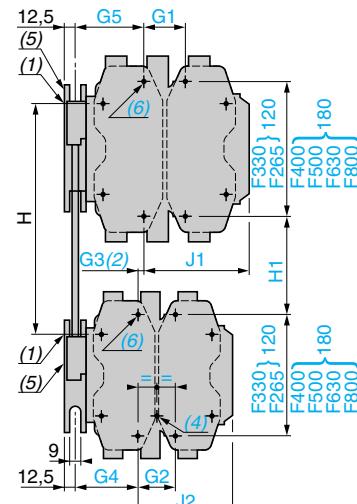

(6) 4 x Ø 0.85 for LC1 F400, F500 or


4 x Ø 1.05 for LC1 F630 and F800.

Assembly A (7) - Mechanical interlock reference

	G3 3P	G3 4P	H min.	H max.	H1 min.	H1 max.	J1 3P	J1 4P
LA9 FF4F	0	0	200	310	80	190	137	155.5
LA9 FG4F	3	4	210	300	90	180	139.5	159.5
LA9 FG4G	0	0	220	310	100	190	139.5	159.5
	J2 3P	J2 4P	J3 3P	J3 4P	J4 3P	J4 4P		
LA9 FF4F	137	155.5	48.5	67	48.5	67		
LA9 FG4F	137	155.5	53	73	54	69		
LA9 FG4G	139.5	159.5	53	73	53	73		

For customer assembly, fixing recommended on AM1 EC uprights,
please consult your Regional Sales Office

2 x LC1 F780

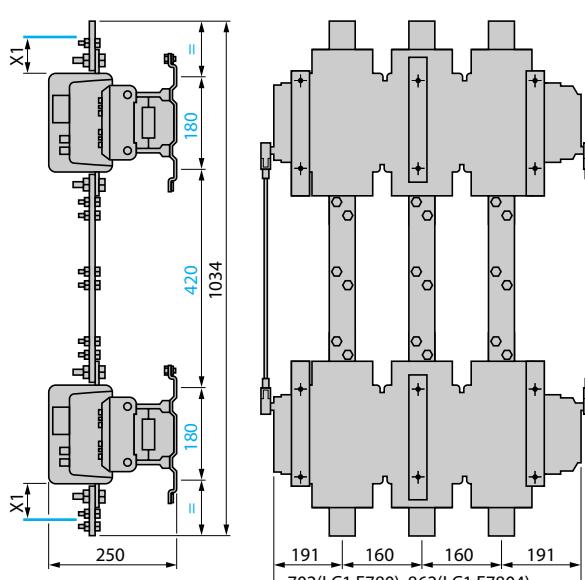

X1 and fixings, see page 5/141.

(7) Only 3P for F800.

(8) In this case, G4 is greater than G5.

Assembly B (7) - Mechanical interlock reference

	G1 3P	G1 4P	G3 3P	G3 4P	G5 3P	G5 4P	H min.	H max.
LA9 FH4F	96	96	21	27	60	83	240	380
LA9 FJ4F	80	80	45	26	83	83	250	380
LA9 FK4F	80	140	45	26	83	83	270	380
LA9 FL4F	180	240	35	17	74	74	310	380
LA9 FH4G	96	96	19	23	60	83	250	380
LA9 FJ4G	80	80	42	22	83	83	250	380
LA9 FK4G	80	140	42	22	83	83	270	380
LA9 FL4G	180	240	33	13	74	74	310	380
	H1 min.	H1 max.	J1 3P	J1 4P	J2 3P	J2 4P	J4 3P	J4 4P
LA9 FH4F	110	250	157.5	181.5	137	155.5	48.5	67
LA9 FJ4F	80	210	144.5	192.5	137	155.5	48.5	67
LA9 FK4F	100	210	164.5	219.5	137	155.5	48.5	67
LA9 FL4F	140	210	248.5	328.5	137	155.5	48.5	67
LA9 FH4G	120	250	157.5	181.5	139.5	159.5	53	73
LA9 FJ4G	90	220	144.5	192.5	139.5	159.5	53	73
LA9 FK4G	110	220	164.5	219.5	139.5	159.5	53	73
LA9 FL4G	150	220	248.5	328.5	139.5	159.5	53	73

Assembly C (7)

	G1 3P	G1 4P	G2 3P	G2 4P	G3 3P	G3 4P	G4 3P	G4 4P	G5 3P	G5 4P
LA9 FH4H	96	96	96	96	0	0	60	83	60	83
LA9 FJ4H	80	80	96	96	23	0	60	83	83	83
LA9 FK4H	80	140	96	96	23	0	60	83	83	83
LA9 FL4H	180	240	96	96	14	9 (8)	60	83	74	74
LA9 FJ4J	80	80	80	80	0	0	83	83	83	83
LA9 FK4J	80	140	80	80	0	0	83	83	83	83
LA9 FL4J	180	240	80	80	9 (8)	9 (8)	83	83	74	74
LA9 FK4K	80	140	80	140	0	0	83	83	83	83
LA9 FL4K	180	240	80	140	9 (8)	9 (8)	83	83	74	74
LA9 FL4L	180	240	180	240	0	0	74	74	74	74
	H min.	H max.	H1 min.	H1 max.	J1 3P	J1 4P	J2 3P	J2 4P		
LA9 FH4H	250	380	130	260	157.5	181.5	157.5	181.5		
LA9 FJ4H	260	380	110	230	144.5	192.5	157.5	181.5		
LA9 FK4H	280	380	130	230	164.5	219.5	157.5	181.5		
LA9 FL4H	330	380	170	220	248.5	328.5	157.5	181.5		
LA9 FJ4J	260	380	60	200	144.5	192.5	144.5	192.5		
LA9 FK4J	280	380	100	200	164.5	219.5	144.5	192.5		
LA9 FL4J	325	380	140	195	248.5	329.5	144.5	192.5		
LA9 FK4K	300	380	120	200	164.5	329.5	164.5	219.5		
LA9 FL4K	345	380	160	195	248.5	328.5	164.5	219.5		
LA9 FL4L	380	380	200	200	248.5	328.5	248.5	328.5		

Selection :
pages 5/194 to 5/217

References :
pages 5/116 to 5/121

Schemes


TeSys contactors

TeSys F reversing contactors and changeover contactor pairs

Reversing contactors for motor control LC2 F


2 x LC1 F

Horizontally mounted

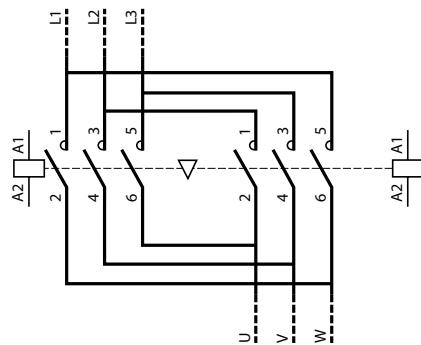

2 x LC1 F


Vertically mounted

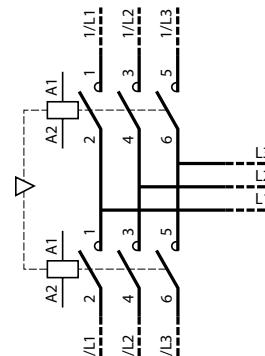

Changeover contactor pairs for distribution LC2 F


2 x LC1 F

Horizontally mounted

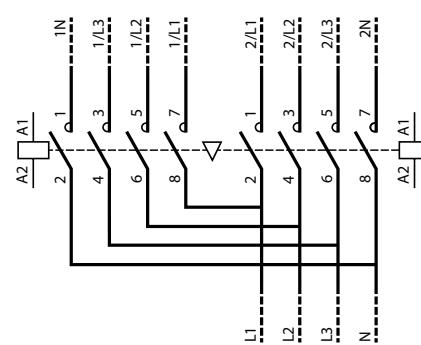


2 x LC1 F

Vertically mounted

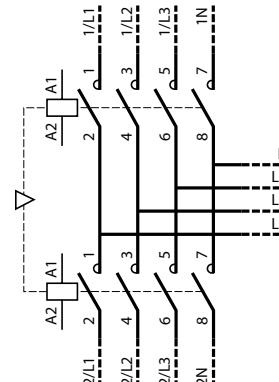

Electrical interlocking of reversers fitted with mechanical interlock without integral electrical contacts

LA9 F



General

TeSys contactors

High power changeover contactor pairs
for distribution
Control circuit: a.c. or d.c.

General


A changeover contactor pair ensures continuity of operation of an installation and energy management.

It switches between:


- a power supply source M (main) which normally supplies the installation,
- and a power supply source S (standby) which may be an incoming line from an additional network or a generating set.

The supply sources may be 3-phase or 3-phase + neutral.

Supply - 3-phase

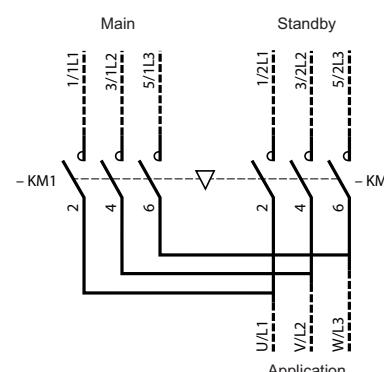

Supply 3-phase + neutral

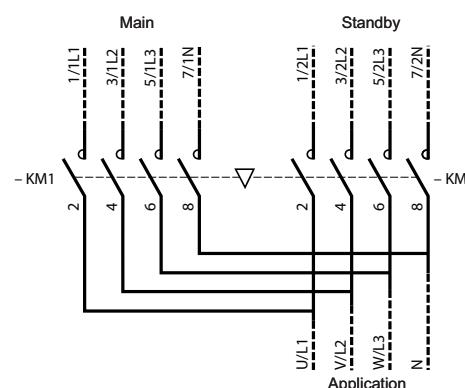


The 2 contactors must be mechanically and electrically interlocked to prevent any paralleling, even transitory, of the two supplies.

References

TeSys contactors


High power changeover contactor pairs
for distribution
Control circuit: a.c. or d.c.

813221

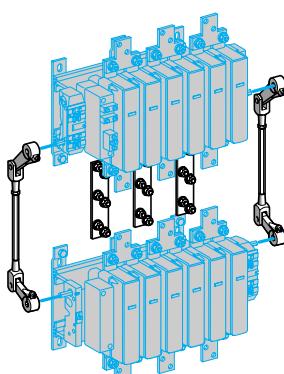

LA9 FX970

813222

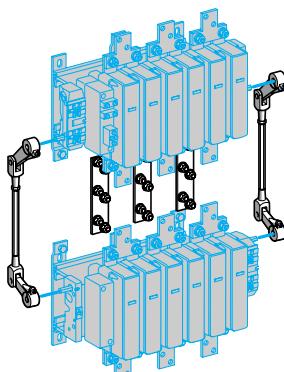

LA9 FX971

Changeover contactor pairs for customer assembly: 3-phase

Vertically mounted.
Maximum operational voltage: 1000 V
Utilisation category: AC-1
Maximum temperature in the vicinity of the devices: 40 °C

Maximum operational current		Contactors (1)		Mechanical interlock (2)
Main 3-phase	Standby 3-phase	Main Reference	Standby Reference	Reference
1600 A	1000 A	LC1 F780	LC1 F6309	LA9 FX970
1600 A	1600 A	LC1 F780	LC1 F780	LA9 FX970

Changeover contactor pairs for customer assembly: 3-phase + neutral

Vertically mounted.
Maximum operational voltage: 1000 V
Utilisation category: AC-1
Maximum temperature in the vicinity of the devices: 40 °C

Maximum operational current		Contactors (1)		Mechanical interlock (2)
Main 3-phase + N	Standby 3-phase + N	Main Reference	Standby Reference	Reference
1600 A + 1000 A	1000 A + 1000 A	LC1 F78041	LC1 F63049	LA9 FX970 (3)
1600 A + 1000 A	1600 A + 1000 A	LC1 F78041	LC1 F78040	LA9 FX970 (3)
1600 A + 1600 A	1000 A + 1000 A	LC1 F7804	LC1 F63049	LA9 FX971
1600 A + 1600 A	1600 A + 1600 A	LC1 F7804	LC1 F7804	LA9 FX971

(1) Coils to be ordered separately, see pages 5/132 to 5/137.

(2) Double mechanical interlock mechanism with 2 interlock connecting rods and 4 power connecting links. To order the 2 auxiliary contact blocks **LAD №1** required to obtain electrical interlocking between the 2 contactors: see page 5/123.

(3) Neutral connecting link not supplied (to be ordered separately).

5

Dimensions :
pages 5/154 and 5/155

Schemes :
page 5/155

Schneider
Electric

5/153

Dimensions

TeSys contactors

High power changeover contactor pairs
for distribution


Dimensions

Contactors used to assemble high power changeover contactor pairs LC1 F780: see page 5/141


LC1 F6309

LC1 F63049


Common side view




LC1 F78040

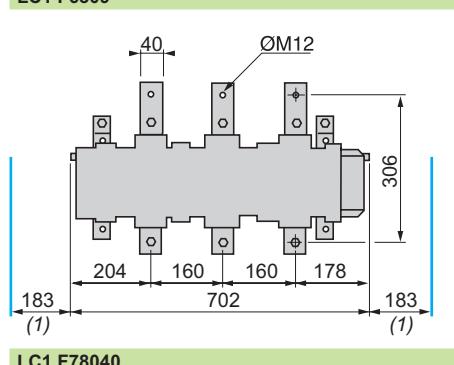



LC1 F78041

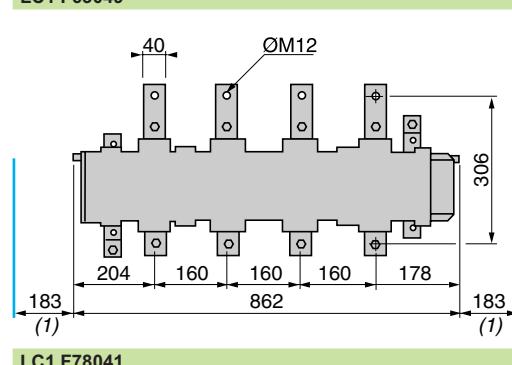

Common side view



LC1 F78040

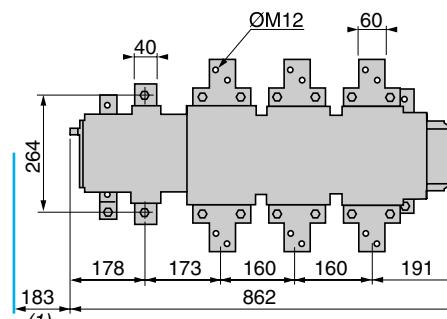
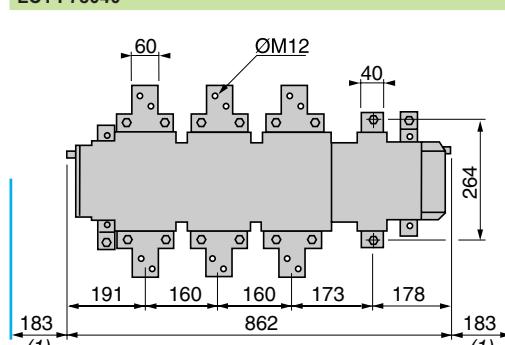


(1) Minimum distance required for removal of each coil.

3-phase changeover contactor pairs

LC1 F780 + LC1 F780 + LA9 FX970: see page 5/150

LC1 F780 + LC1 F6309 + LA9 FX970

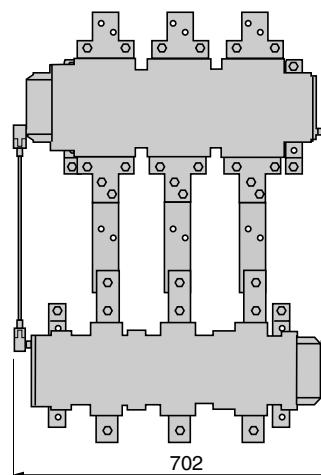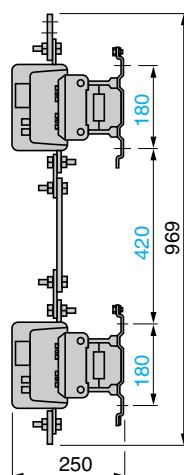

References :
page 5/153

5/154

Schneider
Electric

تهران، کیلومتر ۲۱ بزرگراه لشکری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲

*Dimensions (continued),
schemes*



TeSys contactors

High power changeover contactor pairs
for distribution



Dimensions (continued)

3-phase + neutral changeover contactor pairs



LC1 F78041 + LC1 F63049 + LA9 FX970

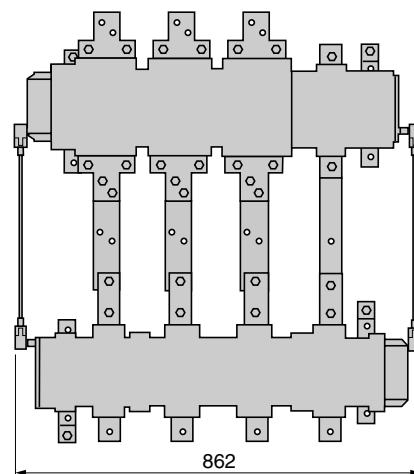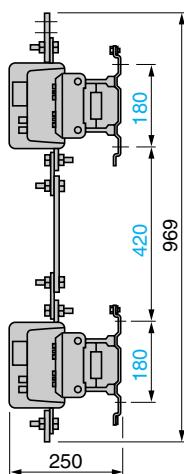



LC1 F78041 + LC1 F78040 + LA9 FX970

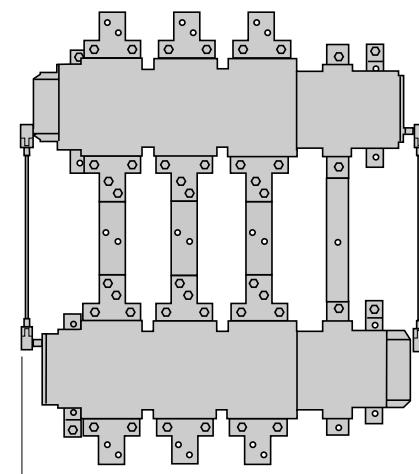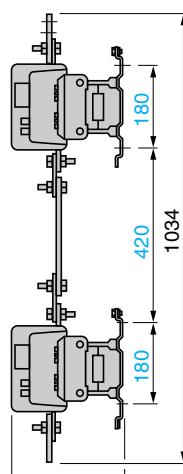

LC1 F7804 + LC1 F63049 + LA9 FX971

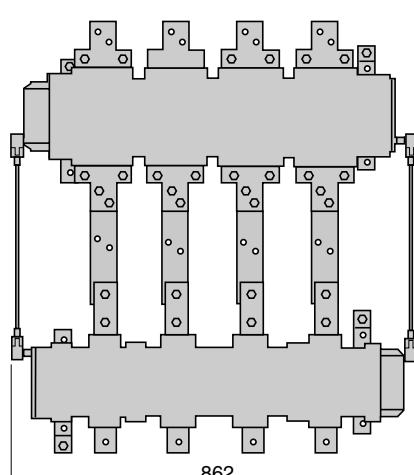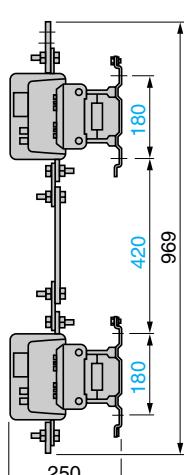


LC1 F7804 + LC1 F7804 + LA9 FX971

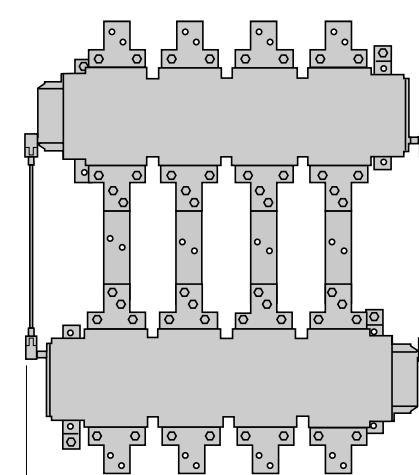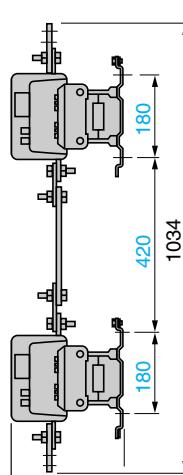


5

Schemes

3-phase changeover contactor pairs

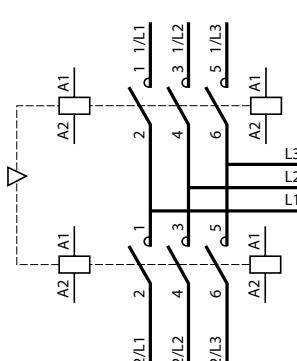

3-phase + neutral changeover contactor pairs

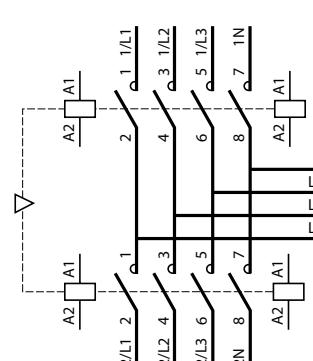

References :
page 5/153

Schneider
Electric

5/155

References, dimensions

TeSys contactors

Capacitive delayed opening devices
For TeSys D contactors

References

These devices prevent inadvertent opening of a contactor in the event of a brief voltage drop or momentary supply failure.

Control circuit : d.c. supply					
For use with contactor		Corresponding delayed opening device			
Type (1)	Contactor reference to be completed (2)	Supply voltage 50/60 Hz	Non-adjustable delay time (Tr)	Reference	Weight
		V	s		kg
LC1 D09, LC1 D12, LC1 D18, LC1 D25, LC1 D32 or LC1 D38	LC1 D•PD LC1 D•QD LC1 D•TD LC1 D•VD LC1 D•WD LC1 D•XD	110...115 120...127 220 240 380 415...440	1.5...5 2.5...5 4...8 5...10 4...8 5.5...13	LAZ R90F LAZ R90F LAZ R90M LAZ R90M LAZ R90Q LAZ R90Q	0.215 0.215 0.215 0.215 0.215 0.215
LC1 D40, LC1 D50 or LC1 D65	LC1 D•PD LC1 D•QD LC1 D•TD LC1 D•WD LC1 D•XD	110...115 120...127 220...240 380 415...440	0.5...1 0.5...1.5 1...2.5 1...2.5 1...3	LAZ R90F LAZ R90F LAZ R90M LAZ R90Q LAZ R90Q	0.215 0.215 0.215 0.215 0.215
LC1 D80	LC1 D•PD LC1 D•QD LC1 D•TD LC1 D•VD LC1 D•WD LC1 D•XD	110...120 120...127 220 240 380 415...440	0.4...1 0.5...1 0.5...2 1...2.5 1...2 1...2.5	LAZ R90F LAZ R90F LAZ R90M LAZ R90M LAZ R90Q LAZ R90Q	0.215 0.215 0.215 0.215 0.215 0.215




LAZ R90F




LAZ R91F

Dimensions

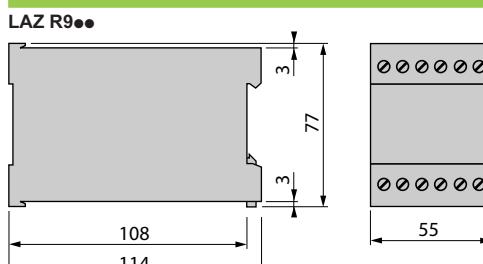

Schemes

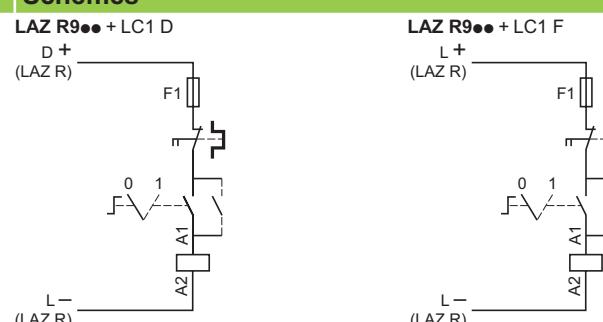

Other versions

Delayed opening devices for use with other types of contactor.
Please consult your Regional Sales Office.

References

TeSys contactors

Capacitive delayed opening devices
For TeSys F contactors

References

These devices prevent inadvertent opening of a contactor in the event of a brief volt drop or momentary supply failure.

Control circuit : d.c. supply (1)					
For use with contactor		Corresponding delayed opening device			
Type	With coil	Supply voltage 50/60 Hz	Non-adjustable delay time (Tr)	Reference	Weight
		V	s		kg
LC1 F115 or LC1 F150	LX4 FF110 LX4 FF125 LX4 FF220 LX4 FF250 LX4 FF375 LX4 FF440	110 127 220 240 380...415 440	2...5 2...5 2...5 2...5 2...5 2...5	LAZ R90F LAZ R90F LAZ R90M LAZ R90M LAZ R90Q LAZ R90Q	0.215 0.215 0.215 0.215 0.215 0.215
LC1 F185 or LC1 F225	LX4 FG110 LX4 FG125 LX4 FG220 LX4 FG250 LX4 FG375 LX4 FG440	110 127 220 240 380...415 440	2...5 2...5 2...5 2...5 2...5 2...5	LAZ R90F LAZ R90F LAZ R90M LAZ R90M LAZ R90Q LAZ R90Q	0.215 0.215 0.215 0.215 0.215 0.215
LC1 F265 or LC1 F330	LX4 FH110 LX4 FH125 LX4 FH220 LX4 FH250 LX4 FH375 LX4 FH440	110 127 220 240 380...415 440	2...5 2...5 2...5 2...5 2...5 2...5	LAZ R90F LAZ R90F LAZ R90M LAZ R90M LAZ R90Q LAZ R90Q	0.215 0.215 0.215 0.215 0.215 0.215
LC1 F400	LX4 FJ110 LX4 FJ125 LX4 FJ220 LX4 FJ250 LX4 FJ375 LX4 FJ400 LX4 FJ440	110 127 220 240 380 415 440	1...2 1...2 1...2 1...2 1...2 1...2 1...2	LAZ R90F LAZ R90F LAZ R90M LAZ R90M LAZ R90Q LAZ R90Q LAZ R90Q	0.215 0.215 0.215 0.215 0.215 0.215 0.215
LC1 F500	LX4 FK110 LX4 FK125 LX4 FK220 LX4 FK250 LX4 FK375 LX4 FK400 LX4 FK440	110 127 220 240 380 415 440	1...2 1...2 1...2 1...2 1...2 1...2 1...2	LAZ R90F LAZ R90F LAZ R90M LAZ R90M LAZ R90Q LAZ R90Q LAZ R90Q	0.215 0.215 0.215 0.215 0.215 0.215 0.215
LC1 F630	LX4 FL110 LX4 FL125 LX4 FL220 LX4 FL250 LX4 FL375 LX4 FL400 LX4 FL440	110 127 220 240 380 415 440	1...2 1...2 1...2 1...2 1...2 1...2 1...2	LAZ R90F LAZ R90F LAZ R90M LAZ R90M LAZ R90Q LAZ R90Q LAZ R90Q	0.215 0.215 0.215 0.215 0.215 0.215 0.215

Add-on blocks for delayed opening devices (1)

Application	For use with delayed opening device	Operational voltage	Non-adjustable delay time	Reference	Weight
		V	s		kg
To double the delay time	LAZ R90F LAZ R90M LAZ R90Q	110...127 220...240 380...440	Tr x 2 Tr x 2 Tr x 2	LAZ R91F LAZ R91M LAZ R91Q	0.165 0.165 0.165

(1) Dimensions and schemes: see page 5/156.

Other versions

Delayed opening devices for use with other types of contactor.
Please consult your Regional Sales Office.

Presentation

TeSys contactors

3-pole shockproof contactors LC1 FG



LC1 FG150



LC1 FG265

Presentation

In an environment subject to severe mechanical shocks, unwanted closing of a contactor's poles and the serious consequences of this, is not permissible.

Shockproof contactors **LC1 FG150** to **FG630** are equipped with an auxiliary electromechanical device which ensures that the contactor is mechanically locked in the "open" position when its main electromagnet is not energised.

If the contactor is subjected to mechanical impact, from back to front or from front to back, accidental closing of the poles is then impossible.

In addition, accidental opening of the poles (when the contactor is in the "on" position), is virtually impossible due to the significant pull-in force characteristic of these contactors.

Applications

- **Marine:** on-board equipment, windlasses, capstans, winches, etc...
- **Military equipment :** land, sea, launching silos.
- **Heavy mechanical handling systems:** travelling cranes, cranes, gantries.
- **Conveying and handling:** lifts, hoists, conveyors.
- **Equipment for power stations.**
- **Distribution boards.**

Presentation (continued)


TeSys contactors

3-pole shockproof contactors LC1 FG

Description of shockproof device


Shockproof contactors LC1 FG●●● are equipped with:

- A lever 1 that is rotated by the core of the contactor's electromagnet.
- An auxiliary electromagnet (EV) for the locking function.
- An RC circuit (Resistor-Capacitor) to limit overvoltage.

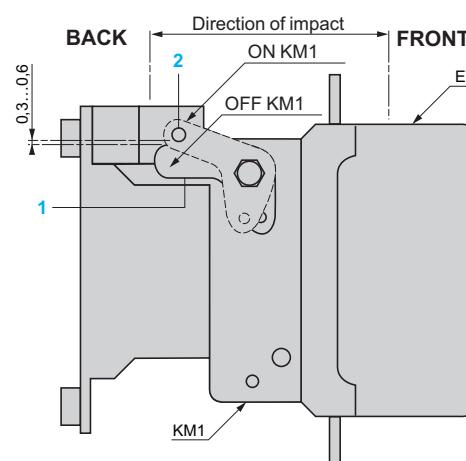

Operation

- In the 'off' position (contactor open and not energised) the core 2 of the electromagnet (EV) locks the lever 1 and therefore the contactor.
- The coils (KM1) and (EV) are energised simultaneously, the core 2 releases the lever 1 and allows the contactor to close.
- De-energisation of the locking electromagnet (EV) is achieved by an auxiliary contact within the contactor.
The core 2 rests freely in lever 1.
- On de-energisation of coil KM1, the moving contact drops out. Core 2, under spring pressure, once again locks lever 1.

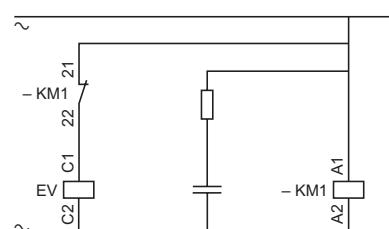

5

Selection

TeSys contactors

3-pole shockproof contactors LC1 FG

a.c. supply

According to the utilisation category and required electrical durability

Use in category AC-3 ($U_e \leq 440$ V)

Operational current and power ($\theta \leq 55$ °C)


Contactors		LC1 FG150	LC1 FG185	LC1 FG265	LC1 FG400	LC1 FG500	LC1 FG630
Operational current	A	150	185	265	400	500	630
Operational power Standard power ratings of motors)	220/230 V	kW	40	55	75	110	147
		hp	54	75	100	150	200
	380/400 V	kW	75	90	132	200	250
		hp	100	185	180	270	340
	415 V	kW	80	100	140	220	280
		hp	110	136	180	300	380
	440 V	kW	80	100	140	250	295
		hp	110	136	190	340	400
	500 V	kW	90	110	160	257	355
		hp	125	150	220	350	480
	660/690 V	kW	100	110	160	280	335
		hp	136	150	220	380	450
	1000 V	kW	65	100	147	185	335
		hp	85	136	200	250	450
							610

Maximum operating rate (operating cycles/hour) (1)

On-load factor	Operational power	LC1 FG150	LC1 FG185	LC1 FG265	LC1 FG400	LC1 FG500	LC1 FG630
≤ 85 %	P	750	750	750	500	500	500
≤ 85 %	0.5 P	2000	2000	2000	1200	1200	1200
≤ 25 %	P	1200	1200	1200	1200	1200	1200

(1) Depending on the operational power and the on-load factor ($\theta \leq 55$ °C)

Electrical durability in utilisation category AC-3 ($U_e \leq 440$ V)

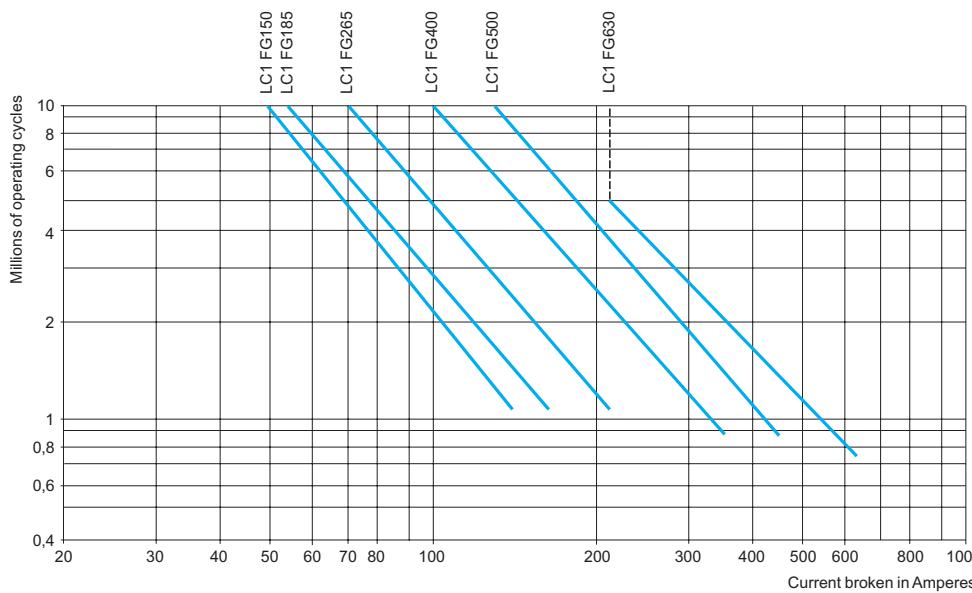

Control of 3-phase asynchronous squirrel cage motors with breaking whilst running.

The current broken (I_e) in category AC-3 is equal to the rated operational current of the motor.

Example:

Asynchronous motor with $P = 55$ kW - $U_e = 380$ V - $I_e = 105$ A

4 million operating cycles required.

The above selection curves show the contactor rating needed: **LC1 FG265**.

Presentation :
pages 5/158 and 5/159

Characteristics :
pages 5/166 to 5/171

References :
page 5/174

Dimensions, schemes :
pages 5/180 and 5/181

5/160

Schneider
Electric

Selection (continued)

TeSys contactors

3-pole shockproof contactors LC1 FG

a.c. supply



According to the utilisation category and required electrical durability

Use in category AC-1 ($U_e \leq 440$ V)

Contactors		Cable	C.s.a.	mm ²	LC1 FG150	LC1 FG185	LC1 FG265	LC1 FG400	LC1 FG500	LC1 FG630
Connection	Bar	Number			—	—	—	2	2	2
		C.s.a.	mm	—	—	—	—	30 x 5	40 x 5	60 x 5
Maximum operating rate in operating cycles/hour				600	600	600	600	600	600	600
Operational current AC-1	≤ 40 °C	A		250	270	350	500	700	1000	
	≤ 55 °C	A		220	240	300	430	580	850	
	≤ 70 °C (1)	A		170	180	250	340	500	700	

(1) Only for operation with coil supplied at U_c .

Increase in operational current by parallel connection of poles




Apply the following multiplying factors to the current values given above. The factors take into account the often unbalanced current distribution between the 2 poles:

- 2 poles in parallel: K = 1.6
- 3 poles in parallel: K = 2.25
- 4 poles in parallel: K = 2.8

Recommended connection scheme to equalise the currents in each pole (see opposite).

Electrical durability in utilisation category AC-1 ($U_e \leq 440$ V)

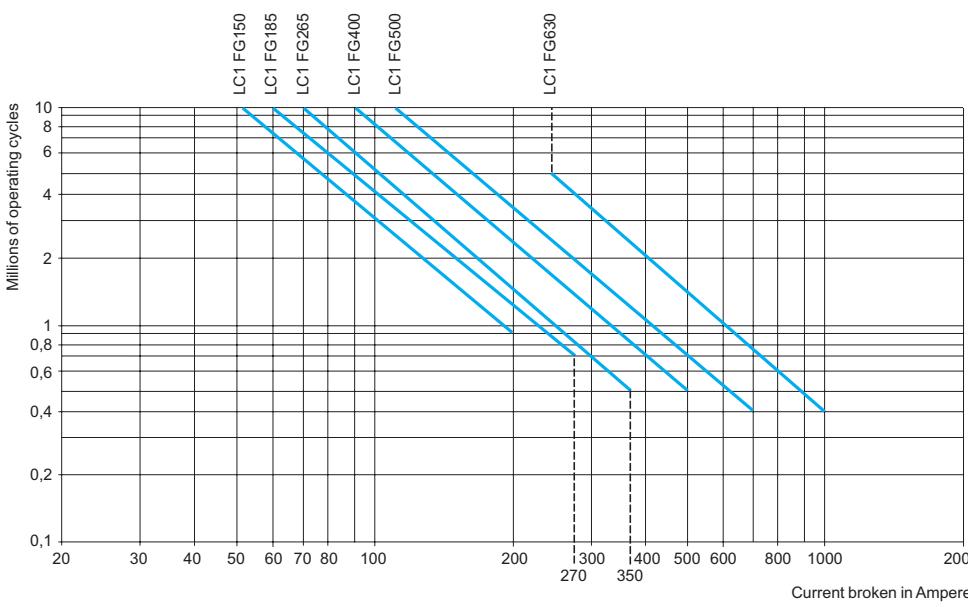

5

Example:

Control of resistive circuits ($\cos \phi \geq 0.95$).

The current broken (I_c) in category AC-1 is equal to the current (I_e) normally drawn by the load.

$U_e = 220$ V - $I_c = I_e = 300$ A - $\theta = 40$ °C.

1 million operating cycles required.

The above selection curves show the contactor rating needed: **LC1 FG400**.

Selection (continued)

TeSys contactors

3-pole shockproof contactors LC1 FG
a.c. supply
According to the utilisation category and required electrical durability

Thermal limits in utilisation categories AC-2/AC-4

Contactors	LC1 FG150	LC1 FG185	LC1 FG265	LC1 FG400	LC1 FG500	LC1 FG630
Thermal limit zone	Operating cycles/hour (1) and on-load factor					
A	From 150 and 15 % to 300 and 10 %	310	380	560	780	1100
B	From 150 and 20 % to 600 and 10 %	280	350	500	700	950
C	From 150 and 30 % to 1200 and 10 %	240	300	400	600	750
D	From 150 and 55 % to 2400 and 10 %	190	240	320	450	600
E	From 150 and 85 % to 3600 and 10 %	145	170	230	350	500


(1) Do not exceed the maximum limit for the mechanical operating cycles.

Counter current braking (plugging)


The current varies from the maximum plug-braking current to the rated motor current.
The current made must be compatible with the making and breaking capacities of the contactor.

In most cases, breaking occurs at a current value close to the locked rotor current and contactor selection can therefore be made using the criteria for utilisation categories AC-2 and AC-4.

Electrical durability in utilisation categories AC-2/AC-4 ($U_e \leq 440$ V)

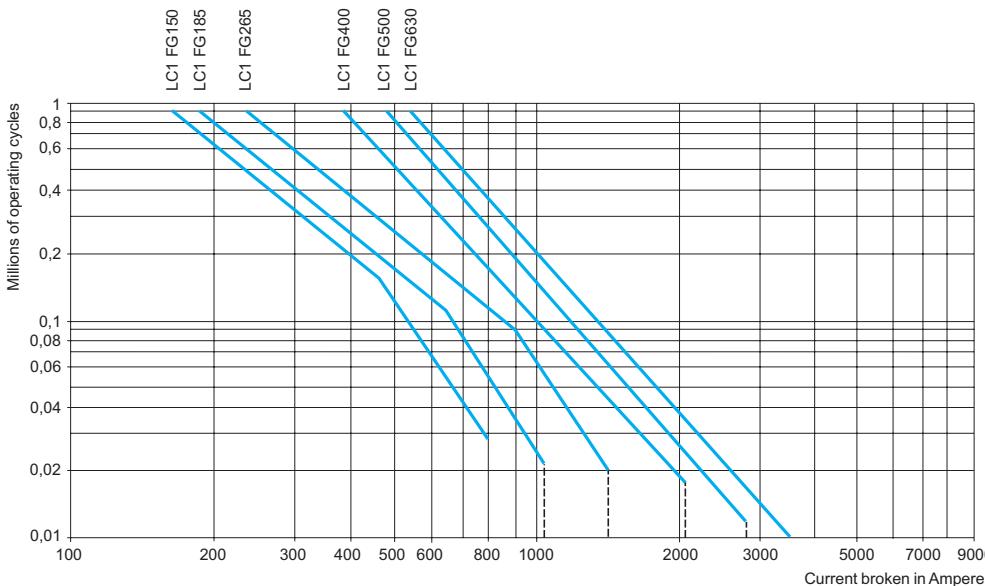

Example: Contactor selection

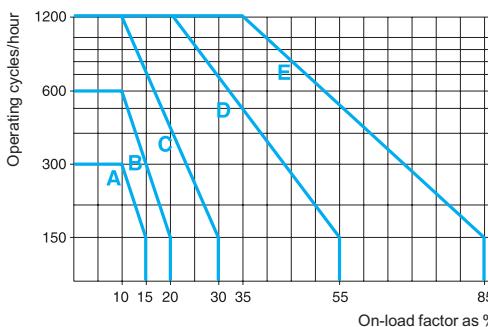

For an on-load factor of 10 % at 400 operating cycles per hour, the curve on the left indicates zone B. If the current broken is 600 A, the above table leads to selection of an **LC1 FG400** contactor. Referring to the electrical durability curves, it can be seen that the contactor will be able to perform 350 000 operating cycles. Where a higher value of electrical durability is required, 1 million operating cycles for example, an **LC1 FG630** contactor would be recommended.

Selection (continued)

TeSys contactors

For switching 3-phase capacitor banks,

used for power factor correction

Switching the primaries of 3-phase transformers (LV/LV)

Switching 3-phase capacitors

Capacitors, together with the circuits to which they are connected, form oscillatory circuits which can, at the moment of switch-on, give rise to high transient currents ($> 180 \text{ In}$) at high frequencies (1 to 15 kHz).

The contactors are used for direct switching. The values of peak current at switch-on must not exceed the values indicated below.

An inductor or an early break resistor may be inserted in each of the three phases supplying the capacitors to reduce the peak current, if necessary. This must be done when switching multiple step capacitor banks.

Inductance values are determined according to the selected operating temperature: please refer to our "Motor starter solutions - Control and protection components" catalogue.

In addition, in accordance with standards IEC 60070, NF C 54 100, VDE 0560, the switching contactor must be able to withstand a continuous current of 1.43 times the rated current of the capacitor bank step being switched.

The rated operational powers given in table the below take this overload into account.

Short-circuit protection is normally provided by g1 fuses rated at 1.3 to 1.6 In.

Maximum operational power of contactors

Maximum operating rate: 120 operating cycles/hour.

Electrical durability at maximum load: 100 000 operations.

With choke inductors connected, where necessary.

Operational power at 50/60 Hz			θ ≤ 55 °C			Maximum peak current	Contactor to be used
θ ≤ 40 °C	220 V	400 V	220 V	400 V	600 V		
kvar	440 V	660 V	240 V	440 V	660 V		
60	100	135	40	85	90	3200	LC1 FG150
70	125	160	50	100	100	3500	LC1 FG185
90	160	225	75	125	125	5000	LC1 FG265
125	220	300	100	160	200	8000	LC1 FG400
180	300	400	125	220	300	10 000	LC1 FG500
250	400	600	190	350	500	12 000	LC1 FG630

Switching the primaries of 3-phase transformers (LV/LV)

When a transformer is switched on, there is generally an initial current surge which can reach 20 to 40 times the rated current for the power ratings shown below.

This current reaches its peak value almost instantaneously and then decreases in a largely exponential manner, quickly dropping back down to its steady state value.

Contactor selection

Operating rate less than 120 operating cycles/hour.

Maximum operational voltages: 1000 V 50/60 Hz.

The value of the peak magnetising current must be lower than the values indicated below.

Maximum ambient temperature: 55 °C.

Contactor		LC1 FG150	LC1 FG185	LC1 FG265	LC1 FG400	LC1 FG500	LC1 FG630
Maximum permissible current peak at switch-on	A	1700	2800	3500	5500	6800	9000
Maximum operational power (1)	220 V	kVA	25	40	50	75	100
	380 V	kVA	50	75	90	130	170
	415/440 V	kVA	55	80	100	140	190
	500 V	kVA	65	95	110	170	225
	660 V	kVA	80	120	140	200	270
	1000 V	kVA	100	150	200	250	375
							470

(1) Maximum operational power corresponding to a current peak at switch-on of 30 In.

Selection (continued)

TeSys contactors

3-pole shockproof contactors LC1 FG

d.c. supply

Selection guide for utilisation categories DC-1 to DC-5

Use in category DC-1 (resistive loads; time constant L/R ≤ 1 ms)

Rated operational current Ie

Operational voltage (Ue) V	Number of poles to be wired in series	Contactors					
		LC1 FG150	LC1 FG185	LC1 FG265	LC1 FG400	LC1 FG500	LC1 FG630
24	1	160	220	300	400	600	850
	2	160	220	300	400	600	850
	3	160	220	300	400	600	850
	4	160	220	300	400	600	850
48/75	1	160	220	300	400	600	850
	2	160	220	300	400	600	850
	3	160	220	300	400	600	850
	4	160	220	300	400	600	850
125	1	—	—	—	—	—	—
	2	130	170	300	400	550	850
	3	130	170	300	400	600	850
	4	130	170	300	400	600	850
225	1	—	—	—	—	—	—
	2	100	150	250	350	450	700
	3	130	170	300	400	600	850
	4	130	170	300	400	600	850
300	3	100	150	250	350	450	700
	4	130	170	300	400	600	850
460	4	100	150	250	350	450	700

Use in category DC-2 to DC-5 (inductive loads; time constant L/R ≤ 15 ms)

Rated operational current Ie

Operational voltage (Ue) V	Number of poles to be wired in series	Contactors					
		LC1 FG150	LC1 FG185	LC1 FG265	LC1 FG400	LC1 FG500	LC1 FG630
24	1	140	180	280	350	550	850
	2	140	180	280	350	550	850
	3	140	180	280	350	550	850
	4	140	180	280	350	550	850
48/75	1	140	180	280	350	550	850
	2	140	180	280	350	550	850
	3	140	180	280	350	550	850
	4	140	180	280	350	550	850
125	1	—	—	—	—	—	—
	2	100	140	250	350	550	850
	3	120	160	280	350	550	850
	4	120	160	280	350	550	850
225	1	—	—	—	—	—	—
	2	80	100	200	280	450	700
	3	100	140	250	350	550	850
	4	120	160	280	350	550	850
300	3	80	100	200	280	450	700
	4	120	160	280	350	550	850
460	4	80	100	200	280	450	700

Selection (continued)

TeSys contactors


3-pole shockproof contactors LC1 FG

d.c. supply

Selection guide for utilisation categories DC-1 to DC-5

Electrical durability

Utilisation categories DC-1 to DC-5

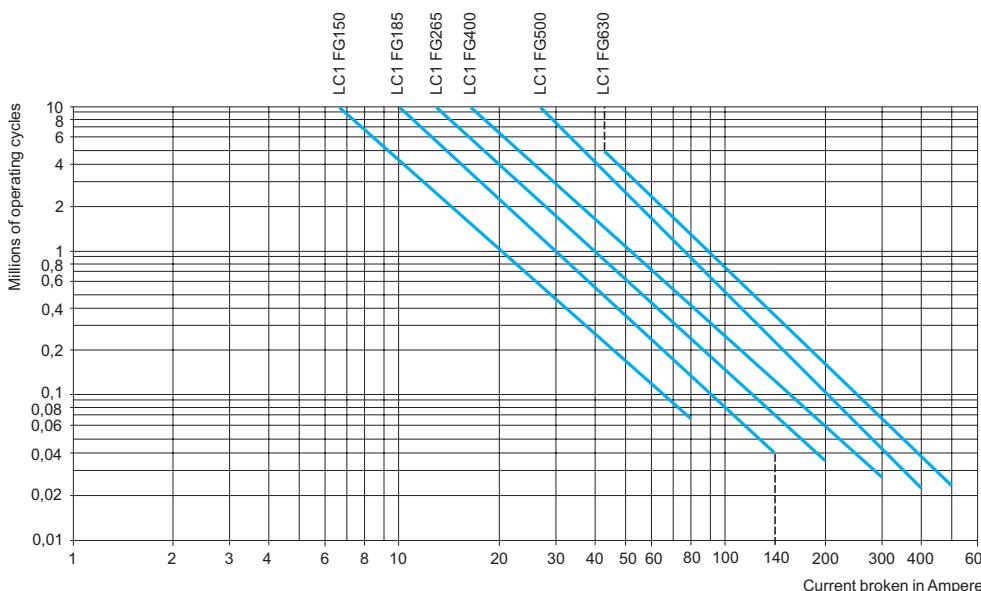

Determining the electrical durability

The electrical durability can be read directly from the curve above, having previously calculated the power broken P_c . The following table gives, for each utilisation category, the value of P_c according to the operational current I_e and the operational voltage U_e .

Utilisation categories	P_c (Power broken)
DC-1 Non-inductive loads	$P_c = U_e \times I_e$
DC-2 Shunt motors, breaking whilst running	$P_c = 0.1 U_e \times I_e$
DC-3 Shunt motors, reversing	$P_c = U_e \times 2.5 I_e$
DC-4 Series wound motors, breaking whilst running	$P_c = 0.3 U_e \times I_e$
DC-5 Series wound motors, reversing	$P_c = U_e \times 2.5 I_e$
Counter current braking (plugging)	$P_c = 1.5 U_e \times 1.5 I_e$

Example:

Series wound motor, breaking whilst motor running, category DC-4.

$P = 50 \text{ kW}$, $U_e = 200 \text{ V}$, $I_e = 250 \text{ A}$.

Select contactor **LC1 FG265** with 3 poles in series.

The power broken is: $P_c = 0.3 U_e \times I_e = 0.3 \times 200 \times 250 = 15 \text{ kW}$.

The electrical durability read from the curve is 8 million operating cycles.

5

Maximum operating rate

The following operating rate used at I_e must not be exceeded: 120 operating cycles/hour.

Use of poles in parallel


The electrical durability is equal to the number of operating cycles performed by a pole, multiplied by the number of poles in parallel, multiplied by a coefficient of 0.70.

Characteristics

TeSys contactors

3-pole shockproof contactors LC1 FG
Control circuit: a.c.

Environment

Contactor type		LC1 FG150	LC1 FG185
Rated insulation voltage (Ui)	Conforming to IEC 60947-4-1	V	1000
	Conforming to VDE 0110 gr C	V	1500
Rated impulse withstand voltage (Uimp)	Coil not connected to the power circuit	kV	8
Conforming to standards			EN 60947-1, EN 60947-4-1, IEC 60947-1, IEC 60947-4-1
Product certifications			N.A.T.O.
Degree of protection	Conforming to IEC 60529		IP 20 front face with shrouds LA9 F
	Conforming to VDE 0106		Front face protected against direct finger contact with shrouds LA9 F
Protective treatment	Standard version		"TH"
Ambient air temperature around the device	Storage	°C	- 60...+ 80
	Operation	°C	- 5...+ 55
	Permissible at Uc (1)	°C	- 40...+ 70
Maximum operating altitude	Without derating	m	3000
Operating positions	Without derating		
	With derating (3)		Fixing A  Fixing B 
	Not to be used		
Shock resistance (2)			12 g, 50 ms on the three axes: X, Y, Z
			15 g, 11 ms on the three axes: X, Y, Z

(1) In these conditions, it is recommended that coils LX9F be used for contactor sizes **FG150** to **FG265**.

(2) In the least favourable direction, without change of contact state (coil at Uc).

(3) Horizontal fixing:

- The operational current AC-1 is equivalent to 80% of the value indicated in the catalogue
- Breaking and making capacities not guaranteed
- Mechanical and electrical durabilities not guaranteed

Derating of pull-in and drop-out voltage

Contactors LC1	FG150	FG185	FG265	FG400	FG500	FG630
Fixing A	Pull-in	75%	75%	75%	80%	80%
	Drop-out	105%	105%	105%	110%	110%
Fixing B	Pull-in	115%	115%	115%	120%	120%
	Drop-out	90%	90%	90%	95%	95%

Presentation :
pages 5/158 and 5/159






Selection :
pages 5/160 to 5/165

References :
page 5/174

Dimensions, schemes :
pages 5/180 and 5/181

5/166

Schneider
Electric

LC1 FG265	LC1 FG400	LC1 FG500	LC1 FG630
1000			
1500			
8			
EN 60947-1, EN 60947-4-1, IEC 60947-1, IEC 60947-4-1			
N.A.T.O.			
IP 20 front face with shrouds LA9 F			
Front face protected against direct finger contact with shrouds LA9 F			
"TH"			
- 60...+ 80			
- 5...+ 55			
- 40...+ 70			
3000			
			
			
A 			
B 			
			
12 g, 50 ms on the three axes: X, Y, Z			
15 g, 11 ms on the three axes: X, Y, Z			

Characteristics (continued)

TeSys contactors

3-pole shockproof contactors LC1 FG
 Control circuit: a.c.

Pole characteristics

Contactor type		LC1 FG150	LC1 FG185
Number of poles		3	3
Rated operational current (Ie) (Ue ≤ 440 V)	In AC-3, θ ≤ 70 °C	A 150/150	185/180
	In AC-1, θ ≤ 55 °C	A 220/170	240/180
Rated operational voltage (Ue)	Up to	V 1000	1000
Frequency limits	Of the operational current (1)	Hz 25 to 200	25 to 200
Conventional thermal current	θ ≤ 40	°C 250	275
Rated making capacity	I rms conforming to IEC 60947-4-1	A Making current: 10 x I in AC-3	
Rated breaking capacity	I rms conforming to IEC 60947-4-1	A Making and breaking current: 8 x I in cat. AC-3	
Permissible short time rating No current flowing for preceding 60 minutes with θ ≤ 40 °C	For 1.5 or 10 s	A 1200	1500
	For 30 s	A 700	920
	For 1 mn	A 600	740
	For 3 mn	A 450	500
	For 10 mn	A 350	400
Fuse protection against short-circuits (U ≤ 440 V)	Motor circuit (type aM)	A 160	200
	With thermal overload relay (type gG)	A 200	315
	gG fuses	A 250	315
Average impedance per pole	At Ith and 50 Hz	mΩ 0.35	0.33
Power dissipation per pole for the above operational currents	AC-3	W 8	12
	AC-1	W 22	25
Cabling Minimum c.s.a.	Bar	No. of bars	2
	Bar	mm 25 x 3	25 x 3
	Cable with lug	mm ² 120	150
	Cable with connector	mm ² 120	150
	Bolt diameter	mm Ø 8	Ø 8
Tightening torque	Power circuit connections	N.m 18	18

(1) Sine wave without interference. Above these values, please consult your Regional Sales Office.

LC1 FG265	LC1 FG400	LC1 FG500	LC1 FG630
3	3	3	3
265/250	400/340	500/500	630/630
300/250	430/340	580/500	850/700
1000	1000	1000	1000
25 to 200	25 to 200	25 to 200	25 to 200
350	500	700	1000
Making current: 10 x I in AC-3			
Making and breaking current: 8 x I in AC-3			
2200	3600	4200	5050
1230	2400	3200	4400
950	1700	2400	3400
620	1200	1500	2200
480	1000	1200	1600
315	400	500	630
500	630	800	800
400	500	800	1000
0.3	0.26	0.18	0.12
21	42	45	48
37	65	88	120
2	2	2	2
32 x 4	30 x 5	40 x 5	60 x 5
240	2 x 150	2 x 240	-
240	-	-	-
Ø 10	Ø 10	Ø 10	Ø 12
35	35	35	58

Characteristics (continued)

TeSys contactors

3-pole shockproof contactors LC1 FG
Control circuit: a.c.

Control circuit characteristics with LX1 coil

Contactor type	50 or 60 Hz		V	LC1 FG150	LC1 FG185
Rated control circuit voltage (Uc)	50 or 60 Hz		V	48...440	
Control voltage limits ($\theta \leq 55^{\circ}\text{C}$)	50 or 60 Hz coils	Operation		0.85...1.1 Uc	
		Drop-out		0.35...0.55 Uc	
	40...400 Hz coils	Operation		—	
		Drop-out		—	
Average consumption at 20 °C and at Uc	~ 50 Hz	Inrush	50 Hz coil	VA	550
			40...400 Hz coil	VA	—
			Cos φ	VA	0.3
	~ 60 Hz	Sealed	50 Hz coil	VA	45
			40...400 Hz coil	VA	—
			Cos φ	VA	0.3
	~ 60 Hz	Inrush	60 Hz coil	VA	660
			40...400 Hz coil	VA	—
			Cos φ	VA	0.3
	Sealed	Sealed	60 Hz coil	VA	55
			40...400 Hz coil	VA	—
			Cos φ	VA	0.3
Heat dissipation			W	12...16	18...24
Operating time (1)	Closing "C"		ms	23...35	20...35
	Opening "O"		ms	5...15	7...15
Mechanical durability at Uc	In millions of operating cycles			10	10
Maximum operating rate at ambient temperature $\leq 55^{\circ}\text{C}$	In operating cycles per hour			2400	2400
Cabling Min/max c.s.a.	Flexible cable without cable end	1 or 2 conductors	mm ²	1/4	1/4
	Flexible cable with cable end	1 conductor	mm ²	1/4	1/4
		2 conductors	mm ²	1/2.5	1/2.5
	Solid cable without cable end	1 or 2 conductors	mm ²	1/4	1/4
Tightening torque		N.m		1.2	1.2

Characteristics of the locking electromagnet (shockproof device)

Contactor type		LC1 FG150	LC1 FG185
Control circuit voltage 50/60 Hz	V	48...440	48...440
Inrush consumption	VA	100	100
Maximum energisation time at Uc	ms	20	20
Maximum operating rate	In operating cycles per hour	2400	2400
Mechanical durability at Uc	In millions of operating cycles	1×10^6	1×10^6

(1) The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles.
The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.

LC1 FG265	LC1 FG400	LC1 FG500	LC1 FG630
48...440	110...440	110...440	110...440
-	-	-	-
-	-	-	-
0.85...1.1 Uc	0.85...1.1 Uc	0.85...1.1 Uc	0.85...1.1 Uc
0.35...0.55 Uc	0.3...0.5 Uc	0.3...0.5 Uc	0.25...0.5 Uc
-	-	-	-
650	1075	1100	1650
0.9	0.9	0.9	0.9
-	-	-	-
10	15	18	22
0.9	0.9	0.9	0.9
-	-	-	-
650	1075	1100	1650
0.9	0.9	0.9	0.9
-	-	-	-
10	15	18	22
0.9	0.9	0.9	0.9
8	14	18	20
40...65	40...75	40...75	40...80
100...170	100...170	100...170	100...200
10	10	10	10
2400	2400	2400	1200
1/4	1/4	1/4	1/4
1/4	1/4	1/4	1/4
1/2.5	1/2.5	1/2.5	1/2.5
1/4	1/4	1/4	1/4
1.2	1.2	1.2	1.2
LC1 FG265	LC1 FG400	LC1 FG500	LC1 FG630
48...440	110...440	110...440	110...440
100	100	100	100
20	20	20	20
2400	2400	2400	1200
1×10^6	1×10^6	1×10^6	1×10^6

Characteristics

TeSys contactors

Auxiliary contact blocks for 3-pole shockproof contactors LC1 FG

Environment

Contact block type	LAD N	LAD T and LAD S	LAD R
Conforming to standards	IEC 60947-5-1, NF C 63-140, VDE 0660, BS 4794, EN 60947-5-1		
Product certifications	UL, CSA		
Protective treatment	Conforming to IEC 60068		
Degree of protection	Storage	°C	- 60...+ 80
	Operation	°C	- 5...+ 60
	Permissible for operation at Uc	°C	- 40...+ 70
Maximum operating altitude	Without derating	m	3000
Cabling	Phillips N° 2 and Ø 6 mm. Flexible or solid cable with or without cable end	mm ²	Min: 1 x 1; max: 2 x 2.5

Instantaneous and time delay contact characteristics

Contact block type	LAD N	LAD T and LAD S	LAD R
Number of contacts	1 or 4	2	2
Rated operational voltage (Ue)	Up to	V	660
Rated insulation voltage (Ui)	Conforming to IEC 60947-5-1	V	690
Conforming to UL, CSA	V	600	
Conventional thermal current (Ith)	For ambient temperature ≤ 60 °C	A	10
Frequency of the operational current		Hz	25...400
Minimum switching capacity	U min	V	17
I min	mA		5
Short-circuit protection	Conforming to IEC 60947-5-1 and VDE 0660. gG fuse	A	10
Rated making capacity	Conforming to IEC 60947-5-1, I rms	A	~ 140; ≈ 250
Short-time rating	Permissible for	1 s	100
		500 ms	120
		100 ms	140
Insulation resistance		MΩ	> 10
Non-overlap time	Guaranteed between N/C and N/O contacts	ms	1.5 (on energisation and on de-energisation)
Time delay (LADT, R and S contact blocks) Accuracy only valid for setting range indicated on the front face	Ambient air temperature for operation	°C	- 40...+ 70
	Repeat accuracy		± 2 %
	Drift up to 0.5 million operating cycles		+ 15 %
	Drift depending on ambient air temperature		0.25 % per °C
Mechanical durability	In millions of operating cycles		5
Rated operational power of contacts Conforming to IEC 60947-5-1	1 million operating cycles	V	24
		VA	150
	3 million operating cycles	VA	80
	10 million operating cycles	VA	30
	Occasional making capacity	VA	1200
		48	48
		110/127	110/127
		220/230	220/230
		380/400	380/400
		440	440
		600	600
		500	500
		320	320
		130	130
		13000	13000
		15000	13000
		9000	

References :
page 5/175

Schemes :
page 5/181

Characteristics (continued)


TeSys contactors

Auxiliary contact blocks
for 3-pole shockproof contactors LC1 FG


Environment		
Module type	LAD T (On-delay)	LAD R (Off-delay)
Conforming to standards	IEC 60255-5	
Product certifications	UL, CSA	
Protective treatment	Conforming to IEC 60068	"TH"
Degree of protection	Conforming to VDE 0106	Protection against direct finger contact IP2X
Ambient air temperature around the device	Storage °C -40...+ 80 Operation °C -25...+ 55 For operation at Uc °C -25...+ 70	
Rated insulation voltage (Ui)	Conforming to IEC 60947-1	V 250
Cabling	Phillips N° 2 and Ø 6 mm. Flexible or solid cable with or without cable end	mm ² Min: 1 x 1; max: 2 x 2.5
Control circuit characteristics		
Module type	LAD T (On-delay)	LAD R (Off-delay)
Built-in protection	Of the input By varistor Contactor coil suppression By varistor	By varistor By bidirectional peak limiting diode
Rated control circuit voltage (Uc)	V ~ or ≡ 24...250	~ 24...250
Permissible variation	0.8...1.1 Uc	0.8...1.1 Uc
Control type	By mechanical contact only	By mechanical contact only connecting cable < 10 m
Time delay characteristics		
Module type	LAD T (On-delay)	LAD R (Off-delay)
Timing ranges	s 0.1...2 ; 1.5...30 ; 25...500	0.1...2 ; 1.5...30 ; 25...500
Repeat accuracy	0...40 °C ± 3 % (10 ms minimum)	± 3 % (10 ms minimum)
Reset time	ms During time delay period 150 After time delay period 50	225 —
Immunity to microbreaks	ms During time delay period 10 After time delay period 2	20 —
Minimum impulse duration	ms —	40
Time delay signalling	By LED Illuminates during time delay period	Illuminates during time delay period
Switching characteristics (solid state type)		
Module type	LAD T (On-delay)	LAD R (Off-delay)
Maximum power dissipated	W 2	3.5
Leakage current	mA < 5	< 5
Residual voltage	V 3.3	3.3
Overvoltage protection		3 kV; 0.5 joule
Electrical durability	In millions of operating cycles 30	30

Operating diagrams

Electronic On-delay timer LAD T

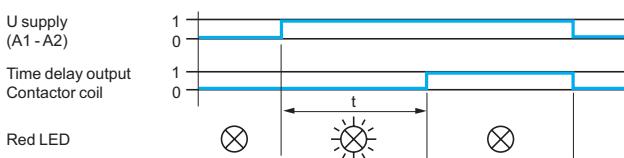

Electronic Off-delay timer LAD R

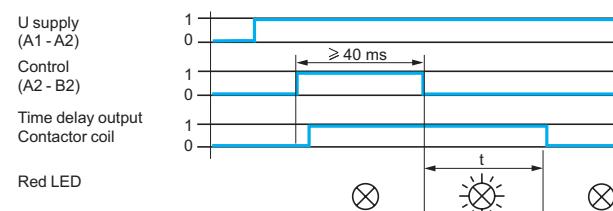

References

TeSys contactors

3-pole shockproof contactors LC1 FG
For control of motors and distribution circuits.
Control circuit: a.c.



LC1 FG150



LC1 FG185



LC1 FG265

5

3-pole shockproof contactors								Rated operational current in cat. AC-3, 440 V/AC-1 up to	DCN ref.	(1) Basic reference, to be completed by adding the voltage code (3)	Weight
220 V	380 V	660 V	230 V	400 V	415 V	500 V	690 V	1000 V			
kW	kW	kW	kW	kW	kW	kW	kW	A			kg
40	75	80	80	90	100	65	150	250	CR182	LC1 FG150●●	3.430
55	90	100	100	110	110	100	185	275	CR242	LC1 FG185●●	4.650
75	132	140	140	160	160	147	265	350	CR302	LC1 FG265●●	7.440
110	200	220	250	257	280	185	400	500	CR432	LC1 FG400●●	9.100
147	250	280	295	355	335	335	500	700	CR582	LC1 FG500●●	11.350
200	335	375	400	400	450	450	630	1000	CR852	LC1 FG630●●	18.600

Note: These contactors have instantaneous auxiliary contact blocks with 2 N/O contacts, 1 N/C contact and one coil maintaining contact.

(1) Devices approved by the DCN (French naval shipyard department) and authorised for on-board use.

(2) Power terminals can, if required, be protected against direct finger contact by the addition of shrouds, to be ordered separately (see page 5/176).


(3) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

Volt ~	48	110	115	120	208	220	230	240	380	400	415	440
LC1 FG 150...FG185	50 Hz (coil LX1)	E5	F5	F5	–	–	M5	P5	U5	Q5	V5	N5
	60 Hz (coil LX1)	E6	F6	–	–	L6	M6	–	U6	Q6	–	–
	50/60 Hz (coil LX9)	E7	F7	F7	G6	L7	M7	P7	U7	Q7	V7	N7
LC1 FG265	40...400 Hz (coil LX1)	E7	F7	F7	G7	L7	M7	P7	U7	Q7	V7	N7
LC1 FG400...FG500	40...400 Hz (coil LX1)	–	F7	F7	G7	L7	M7	P7	U7	Q7	V7	N7
LC1 FG630	40...400 Hz (coil LX1)	–	F7	F7	F7	L7	M7	P7	U7	Q7	V7	N7
					R7							

References

TeSys contactors

Auxiliary contact blocks for
3-pole shockproof contactors LC1 FG




LAD N•

Instantaneous auxiliary contact blocks

For use in normal operating environments

Number of contacts	Max. number of blocks per contactor Clip-on mounting	Composition	Reference	Weight
1	1		LAD N10	(1) 0.020
			LAD N01	(1) 0.020
4	1	- - 2 2	LAD N22	(1) 0.050
		- - 4 -	LAD N40	(1) 0.050
		- - - 4	LAD N04	(1) 0.050
		- - 3 1	LAD N31	(1) 0.050



LAD T•


Time delay auxiliary contact blocks

Number of contacts	Max. number of blocks per contactor Clip-on mounting	Time delay	Reference	Weight
		Type	Range	
1 N/O + 1 N/C	1	On-delay	0.1...3 (2)	LAD T0
			0.1...30	LAD T2 (1) 0.060
		10...180	LAD T4	0.060
			1...30 (3)	LAD S2 0.060
		Off-delay	0.1...3 (2)	LAD R0 0.060
			0.1...30	LAD R2 (1) 0.060
		10...180	LAD R4	0.060

(1) Device approved by the DCN (French naval shipyard department) and authorised for on-board use.

(2) With extended scale from 0.1 to 0.6 s.

(3) With switching time of 40 ms ± 15 ms between opening of the N/C contact and closing of the N/O contact.



LAD R•


5

References


TeSys contactors

Accessories for 3-pole shockproof contactors
LC1 FG

LA9 F103



LA9 FG***



Insulated terminal blocks				
For use with contactors	Cabling	Tightening	Set of 2 blocks	Weight kg
Set reference			Set reference	
LC1 FG150 and FG185	1 x 16...150 mm ² or 2 x 16...95 mm ²	4 mm hexagonal socket key	LA9 F103	0.560
Power terminal protection shrouds				
For use with contactors	Number of shrouds per set	Set reference	Set reference	Weight kg
LC1 FG150 and FG185	6	LA9 F702	(1)	0.250
LC1 FG265, FG400 and FG500	6	LA9 F703	(1)	0.250
LC1 FG630	6	LA9 F704	(1)	0.250
Shockproof devices (locking electromagnet) (2)				
Maximum energisation time at U _c	Inrush consumption	For contactors	Kit reference, to be completed by adding the voltage code (3)	Weight kg
ms	VA			
20	250	LC1 FG150 and FG185	LA9 FG150603** (1)	0.200
		LC1 FG265	LA9 FG265603** (1)	0.200
		LC1 FG400 and FG500	LA9 FG400603** (1)	0.200
		LC1 FG630	LA9 FG630603** (1)	0.200

(1) Device approved by the DCN (French naval shipyard department) and authorised for on-board use.

(2) Replacement shockproof device, supplied in kit form, comprising:

- 1 locking electromagnet.

- fixings suitable for the contactor rating.


(3) Control circuit voltage:

Volt ~	48	110	115/120	208	220	230/240	380	415	440
LA9 FG150 to FG265	50/60 Hz	E	F	F	M	M	M	N	N
LA9 FG400 to FG630	50/60 Hz	–	F	F	M	M	Q	N	N


References (continued)

TeSys contactors

Accessories for 3-pole shockproof contactors
LC1 FG



LA5 FG431



LA5 F40050

Sets of contacts

For use on contactors	Replacement for	Reference	Weight kg
LC1 FG150	3 poles	LA5 FF431	(1) 0.270
LC1 FG185	3 poles	LA5 FG431	(1) 0.350
LC1 FG265	3 poles	LA5 FG431	(1) 0.660
LC1 FG400	3 poles	LA5 F400803	(1) 2.000
LC1 FG500	3 poles	LA5 F500803	(1) 2.950
LC1 FG630	3 poles	LA5 F630803	(1) 6.100

Arc chambers


For use on contactors	Replacement for	Reference	Weight kg
LC1 FG150	3 poles	LA5 F15050	(1) 0.490
LC1 FG185	3 poles	LA5 F18550	(1) 0.670
LC1 FG265	3 poles	LA5 F26550	(1) 0.920
LC1 FG400	3 poles	LA5 F40050	(1) 1.300
LC1 FG500	3 poles	LA5 F50050	(1) 1.850
LC1 FG630	3 poles	LA5 F63050	(1) 3.150

(1) Device approved by the DCN (French naval shipyard department) and authorised for on-board use.

References

TeSys contactors

Coils for 3-pole shockproof contactors LC1 FG
Spare or replacement parts
a.c. supply 50/60 Hz




LX1 FF•••

References		Voltage code	Coil reference	Weight kg
Control circuit voltage Uc 50 Hz	60 Hz			
V	V			kg
Coils for contactors LC1 FG150				
-	48	E6	LX1 FF040	0.430
48	-	E5	LX1 FF048	0.430
-	110	F6	LX1 FF092	0.430
-	115/120	G6	LX1 FF095	(1)
110/115	-	F5	LX1 FF110	0.430
120	-	FE5	LX1 FF120	0.430
-	208	L6	LX1 FF170	0.430
-	320	M6	LX1 FF184	0.430
-	230/240	U6	LX1 FF187	0.430
208	-	LE5	LX1 FF200	0.430
220/230	-	M5	LX1 FF220	0.430
240	-	U5	LX1 FF240	0.430
-	380	Q6	LX1 FF316	0.430
-	415	N6	LX1 FF340	0.430
-	440	R6	LX1 FF360	0.430
380	-	Q5	LX1 FF380	0.430
415/440	-	N5	LX1 FF415	0.430

Specifications

Average consumption at 20 °C:
- inrush 50 Hz: 550 VA; 60 Hz: 660 VA,
- sealed 50 Hz: 45 VA; 60 Hz: 55 VA, $\cos \varphi = 0.32$.
Operating cycles/hour ($\theta = 55^\circ\text{C}$): 2400.



LX1 FG•••

Coils for contactors LC1 FG185

-	48	E6	LX1 FG040	0.550
48	-	E5	LX1 FG048	0.550
-	110	F6	LX1 FG092	0.550
-	115/120	G6	LX1 FG095	(1)
110/115	-	F5	LX1 FG110	0.550
120	-	FE5	LX1 FG120	0.550
-	208	L6	LX1 FG170	0.550
-	320	M6	LX1 FG184	0.550
-	230/240	U6	LX1 FG187	0.550
208	-	LE5	LX1 FG200	0.550
220/230	-	M5	LX1 FG220	0.550
240	-	U5	LX1 FG240	0.550
-	380	Q6	LX1 FG316	0.550
-	415	N6	LX1 FG340	0.550
-	440	R6	LX1 FG360	0.550
380	-	Q5	LX1 FG380	0.550
415/440	-	N5	LX1 FG415	0.550

Specifications

Average consumption at 20 °C:
- inrush 50 Hz: 805 VA; 60 Hz: 970 VA,
- sealed 50 Hz: 55 VA; 60 Hz: 66 VA, $\cos \varphi = 0.34$.
Operating cycles/hour ($\theta = 55^\circ\text{C}$): 2400.

(1) Device approved by the DCN (French naval shipyard department) and authorised for on-board use.

Scheme :
page 5/181


5/178

Schneider
Electric


References (continued)

TeSys contactors


Coils for 3-pole shockproof contactors LC1 FG
Spare or replacement parts
a.c. supply 50/60 Hz




LX1 FH***



LX1 FJ***



LX1 FK***



LX1 FL***

References (continued)

Control circuit voltage Uc 50 and 60 Hz	Voltage code	Coil reference		Weight kg
V				
Coils for contactors LC1 FG265				
110/120	F7	LX1 FH1102	(1)	0.740
208	L7	LX1 FH2002		0.740
220/230	M7	LX1 FH2202		0.740
240	U7	LX1 FH2402		0.740
380/415	Q7	LX1 FH3802		0.740

Specifications

Average consumption at 20 °C:
- inrush 50 or 60 Hz: 600 to 700 VA,
- sealed 50 or 60 Hz: 8 to 10 VA, cos φ = 0.9.
Operating cycles/hour (θ = 55 °C): 2400.

Coils for contactors LC1 FG400

110/120	F7	LX1 FJ110	(1)	1.000
208	L7	LX1 FJ200		1.000
220/230	M7	LX1 FJ220		1.000
230/240	U7	LX1 FJ240		1.000
380/400	Q7	LX1 FJ380		1.000
415/440	N7	LX1 FJ415		1.000

Specifications

Average consumption at 20 °C:
- inrush 50 or 60 Hz: 1000 to 1150 VA,
- sealed 50 or 60 Hz: 12 to 18 VA, cos φ = 0.9.
Operating cycles/hour (θ = 55 °C): 2400.

Coils for contactors LC1 FG500

110/120	F7	LX1 FK110	(1)	1.150
208	L7	LX1 FK200		1.150
220/230	M7	LX1 FK220		1.150
230/240	U7	LX1 FK240		1.150
380/400	Q7	LX1 FK380		1.150
415/440	N7	LX1 FK415		1.150

Specifications

Average consumption at 20 °C:
- inrush 50 or 60 Hz: 1050 to 1150 VA,
- sealed 50 or 60 Hz: 16 to 20 VA, cos φ = 0.9.
Operating cycles/hour (θ = 55 °C): 2400.

Coils for contactors LC1 FG630

110/120	F7	LX1 FL110	(1)	1.500
208	L7	LX1 FL200		1.500
220/230	M7	LX1 FL220		1.500
380/400	Q7	LX1 FL380		1.500
415/440	N7	LX1 FL415		1.500

Specifications

Average consumption at 20 °C:
- inrush 50 or 60 Hz: 1500 to 1730 VA,
- sealed 50 or 60 Hz: 20 to 25 VA, cos φ = 0.9.
Operating cycles/hour (θ = 55 °C): 1200.


(1) Device approved by the DCN (French naval shipyard department) and authorised for on-board use.

Dimensions

TeSys contactors 3-pole shockproof contactors LC1 FG

Dimensions

LC1 FG150, FG185 and FG265

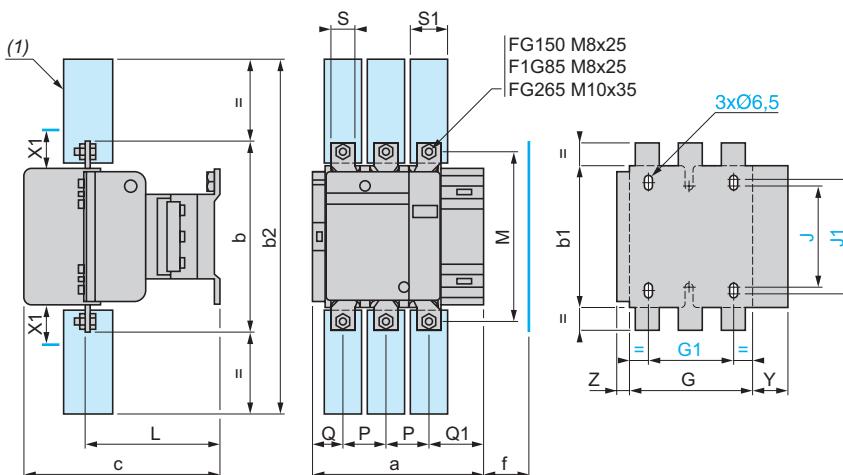

X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

LC1	200...500 V		600...1000 V	
FG150	10		15	
FG185	10		15	
FG265	10		15	


(1) Power terminal protection shroud (see page 5/176).

LC1	a	b	b1	b2	c	f	G	G1	J	J1	L	M	P	Q	Q1	S	S1	Y	Z
FG150	181	170	137	301	180	131	106	80	106	120	116	150	40	26	57.5	20	34	44	13.5
FG185	183.5	174	137	305	190	130	111	80	106	120	122.5	154	40	29	59.5	20	34	44	13.5
FG265	217.5	203	145	375	222	147	142	96	106	120	150	178	48	39	66.5	25	44.5	38	21.5

f = minimum distance required for coil removal.

5

LC1 FG400 and FG500

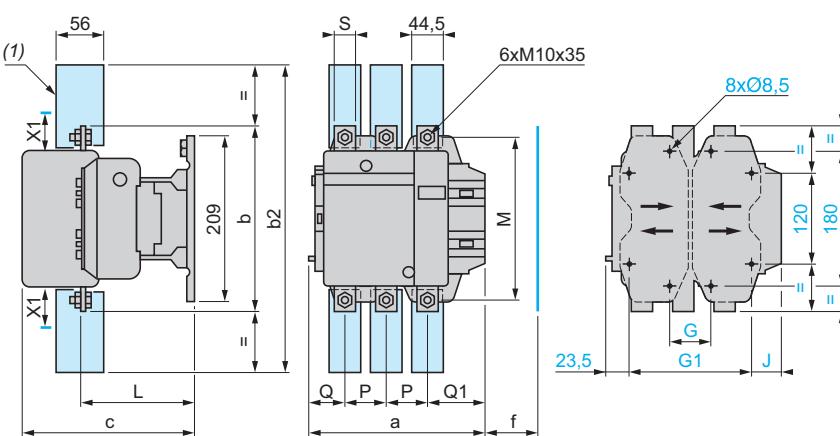

X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

LC1	200...500 V		600...1000 V	
FG400	15		20	
FG500	15		20	

(1) Power terminal protection shroud (see page 5/176).

LC1	a	b	b2	c	f	G supplied	G min.	G max.	G1 supplied	G1 min.	G1 max.	J	L	M	P	Q	Q1	S
FG400	237	206	375	234	146	80	66	102	223	156	192	19.5	160	181	48	75	74	25
FG500	257	238	400	247	150	80	66	120	223	156	210	39.5	181	208	55	78	77	30

f = minimum distance required for coil removal.

Presentation :
pages 5/158 and 5/159

Selection :
pages 5/160 to 5/165

Characteristics :
pages 5/166 to 5/171

References :
page 5/174

5/180


Schneider
Electric

*Dimensions (continued),
schemes*

TeSys contactors
3-pole shockproof contactors LC1 FG

Dimensions (continued)

LC1 FG630

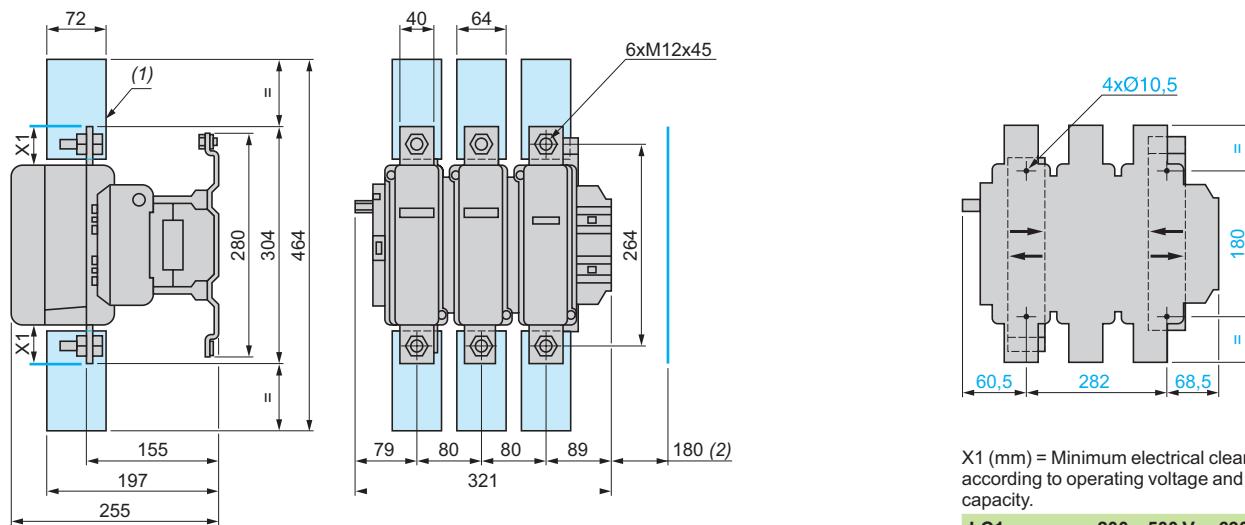

X1 (mm) = Minimum electrical clearance
according to operating voltage and breaking capacity.


LC1	200...500 V	690...1000 V
FG630	20	30

(1) Power terminal protection shroud (see page 5/176).
(2) Minimum distance required for coil removal.

Schemes


Contactors LC1-FG150 to FG630

5

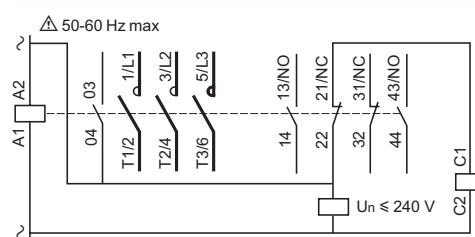

Add-on blocks

Instantaneous auxiliary contacts

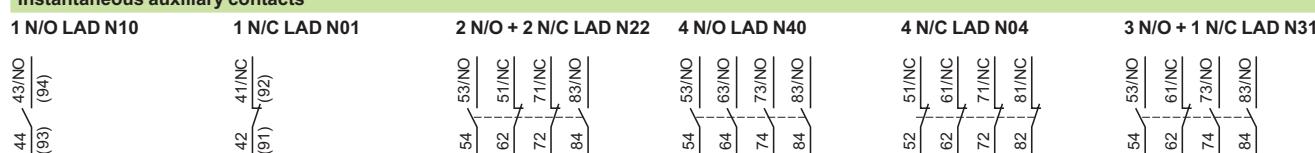


Time delay auxiliary contacts

On-delay 1 N/O + 1 N/C LAD T• Off-delay 1 N/O + 1 N/C LAD R•



Coils ~

LX1 FF, FG, FH, FJ, FK and FL



Presentation :
pages 5/158 and 5/159

Selection :
pages 5/160 to 5/165

Characteristics:
pages 5/166 to 5/171

References:
pages 5/174, 5/178 and 5/179

Schneider
Electric

5/181

Characteristics

TeSys contactors TeSys LC1 B contactors

Environment

			LC1 BL	LC1 BM	LC1 BP	LC1 BR
Rated insulation voltage (Ui)	Conforming to IEC 60158-1/IEC 60947-4	V	1000	1000	1000	1000
	Conforming to VDE 0110 gr C	V	1500	1500	1500	1500
Conforming to standards		IEC 60158-1, IEC 60947-4, NF C 63-110, VDE 0660, BS 5424				
Product certifications		CSA, BV, RINA				
Protective treatment	Standard version		"TC"			
	Special version		"TH"			
Ambient air temperature around the device (for operation at Uc)	Storage	°C	- 60...+ 80			
	Operation	°C	- 5...+ 55			
	Permissible	°C	- 50...+ 60			
Maximum operating altitude	Without derating	m	3000			
Operating positions	Without derating		± 30° occasional, in relation to normal vertical mounting plane			

Pole characteristics

			1, 2, 3 or 4	1, 2, 3 or 4	1, 2, 3 or 4	1, 2, 3 or 4
Number of poles			1, 2, 3 or 4	1, 2, 3 or 4	1, 2, 3 or 4	1, 2, 3 or 4
Rated operational current (Ie) (Ue ≤ 440 V)	In AC-3, θ ≤ 55 °C	A	750	1000	1500	1800
	In AC-1, θ ≤ 40 °C	A	800	1250	2000	2750
Rated operational voltage (Ue)	Up to	V	1000			
Frequency limits (sine wave)	Without derating	Hz	50/60			
	Derating coefficient		100 Hz: 0.9 - 150 Hz: 0.8 - 250 Hz: 0.7 - 400 Hz: 0.5			
Maximum thermal current (Ith)	θ ≤ 40 °C	A	800	1250	2000	2750
Rated making capacity	I rms conforming to IEC 60158-1 and 60947-4	A	10 000	10 000	15 000	18 000
Rated breaking capacity	I rms up to 440 V conforming to IEC 60158-1 and 60947-4	A	10 000	10 000	15 000	18 000
	500 V	A	9000	9000	12 000	15 000
	660-690 V	A	8000	8000	9000	11 000
	1000 V	A	4000	4000	5000	6000
Permissible short time rating From cold state, with no current flowing for previous 60 minutes at θ ≤ 40 °C	For 1 s	A	9600	9600	12 000	15 000
	For 5 s	A	9600	9600	12 000	15 000
	For 10 s	A	7000	8000	9600	12 000
	For 30 s	A	4800	5200	6400	8000
	For 1 min.	A	3500	3800	5200	6300
	For 3 min.	A	2100	2400	3600	4400
	For 10 min.	A	1200	1800	2800	3600
Short-circuit protection by fuses U ≤ 440 V	Motor circuit (type aM)	A	800	1200	2 x 800 (1)	2 x 1000 (1)
	With thermal overload relay (type gl)	A	1000	1500	2 x 1000 (1)	2 x 1200 (1)
	gl fuses	A	800	1200	2 x 1000 (1)	2 x 1200 (1)
Average impedance per pole	At Ith and 50 Hz	mΩ	0.18	0.18	0.13	0.09
Power dissipated per pole	AC-3	W	88	180	290	360
	AC-1	W	115	280	520	680
Connection	Number of bars		2	2	3	4
	Bar	mm	50 x 5	80 x 5	100 x 5	100 x 5
Bolt diameter		mm	4 x Ø 8	4 x Ø 10	4 x Ø 10	4 x Ø 10
Tightening torque	Power circuit connections	N.m	21	35	35	35

(1) Fuses must not be connected in parallel unless specified by the manufacturer.

Selection :
pages 5/194 to 5/217

References :
pages 5/184 to 5/186

Dimensions and schemes :
pages 5/192 and 5/193

5/182

Schneider
Electric

Characteristics (continued)

TeSys contactors TeSys LC1 B contactors

Control circuit characteristics

Contactor type			LC1 BL	LC1 BM	LC1 BP	LC1 BR
Rated control voltage	50/60 Hz	V	110...500	110...500	110...500	110...500
	--- 1,2 or 3-pole contactors	V	48...500	48...500	48...500	48...500
	--- 4-pole contactors	V	48...500	48...500	48...500	60...500
Voltage limits	Operation	V	0.85...1.1 Uc	0.85...1.1 Uc	0.85...1.1 Uc	0.85...1.1 Ucw
	Drop-out	V	0.30...0.50 Uc	0.30...0.50 Uc	0.35...0.50 Uc	0.40...0.50 Uc
Maximum consumption (coil + economy resistor)	~	Number of poles: 1	VA	Inrush: 620 - sealed: 10		
		Number of poles: 2	VA	Inrush: 1000 - sealed: 20		
		Number of poles: 3	VA	Inrush: 1300 - sealed: 31		
		Number of poles: 4	VA	Inrush: 1600 - sealed: 47		
	---	Number of poles: 1	W	Inrush: 520 - sealed: 10		
		Number of poles: 2	W	Inrush: 800 - sealed: 20		
		Number of poles: 3	W	Inrush: 1100 - sealed: 31		
		Number of poles: 4	W	Inrush: 1400 - sealed: 47		
	"C"		ms	100...150	100...150	100...150
	average at Uc (in milliseconds)	"O" breaking on ~ side	ms	50...100	50...100	50...100
		"O" breaking on --- side	ms	20...40	20...40	20...40
Mechanical durability (at Uc)	In millions of operating cycles			1.2	1.2	1.2
Maximum operating rate in mechanical operating cycles	Ambient temperature ≤ 55 °C	Op. cys/h	120	120	120	120

Characteristics of instantaneous auxiliary contacts ZC4 GM•

Rated thermal current	A	20						
Rated insulation voltage	Conforming to IEC 60947-1	V	660					
	Conforming to VDE, group C	V	750					
Short-circuit protection	Conforming to IEC 60947-1 and VDE 0660 gl type cartridge fuses	A	20					
Operational power			~ supply		--- supply			
1 million operating cycles		V	110/127	220	380	415/440	500	110
		VA/W	2000	4000	4000	4000	3500	250
Making and breaking capacity		VA/W	14 000	23 000	35 000	45 000	35 000	1600
Cabling	With cable end	mm ²	1 or 2 x 4 mm ²	conductors				
	Without cable end	mm ²	1 or 2 x 6 mm ²	conductors				

(1) The inrush and sealed power values of d.c. electromagnets often require the use of an intermediate relay for control.

(2) The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles. The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.

References

TeSys contactors TeSys LC1 B contactors



LC1 BP33

Contactors for motor control in category AC-3, from 750 to 1800 A (\sim or \equiv)											
3-pole contactors											
Standard power ratings of 3-phase motors 50-60 Hz in category AC-3								Rated operational current in AC-3 440V up to	Instantaneous auxiliary contacts	Basic reference, to be completed by adding the voltage code (1)	Weight
220 V	380 V	660 V	230 V	400 V	415 V	440 V	500 V	560	A	kg	
220	400	750	425	450	500	560	530	750	2	LC1 BL33•22	58.000
									3	LC1 BL33•31	58.000
									1	LC1 BL33•13	58.000
									4	LC1 BL33•40	58.000
280	500	1000	530	560	600	670	530	1000	2	LC1 BM33•22	57.000
									3	LC1 BM33•31	57.000
									1	LC1 BM33•13	57.000
									4	LC1 BM33•40	57.000
425	750	1500	800	800	700	750	670	1500	2	LC1 BP33•22	94.000
									3	LC1 BP33•31	94.000
									1	LC1 BP33•13	94.000
									4	LC1 BP33•40	94.000
500	900	1800	900	900	900	900	750	1800	2	LC1 BR33•22	129.000
									3	LC1 BR33•31	129.000
									1	LC1 BR33•13	129.000
									4	LC1 BR33•40	129.000

Selection:
pages 5/194 to 5/217

5

Contactors for control in category AC-1, from 800 to 2750 A (\sim or \equiv)									
Single, 2, 3 or 4-pole contactors									
Maximum operational current in AC-1 ($\theta \leq 40^\circ C$)		Number of poles		Instantaneous auxiliary contacts		Basic reference, to be completed by adding the voltage code (1)		Weight	
A		1		2	3	2	3	kg	
800		1		2	3	LC1 BL31•22	LC1 BL31•31	32.000	
				1	3	LC1 BL31•13	LC1 BL31•40	32.000	
			2	2	2	LC1 BL32•22	LC1 BL32•31	45.000	
				1	3	LC1 BL32•13	LC1 BL32•40	45.000	
			3	2	2	LC1 BL33•22	LC1 BL33•31	58.000	
				3	1	LC1 BL33•13	LC1 BL33•40	58.000	
			4	2	2	LC1 BL34•22	LC1 BL34•31	72.000	
				3	1	LC1 BL34•13	LC1 BL34•40	72.000	
			3	2	2	LC1 BL33•22	LC1 BL33•31	58.000	
				3	1	LC1 BL33•13	LC1 BL33•40	58.000	
			4	2	2	LC1 BL34•22	LC1 BL34•31	72.000	
				3	1	LC1 BL34•13	LC1 BL34•40	72.000	
			4	2	2	LC1 BL34•22	LC1 BL34•31	72.000	
				3	1	LC1 BL34•13	LC1 BL34•40	72.000	
			4	2	2	LC1 BL34•22	LC1 BL34•31	72.000	

(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

Volts	48	110	120	125	127	220	230	240	380	400	415	440	500
$\sim 50\text{--}400\text{ Hz}$	—	F	K	—	G	M	P	U	Q	V	N	R	S
—	ED	FD	—	GD	—	MD	—	UD	—	—	—	RD	SD

For voltages other than those indicated above, replace the p in the reference with the operational voltage (3 figures) and the type of current (2 letters: **AC** for a.c. supply and **DC** for d.c. supply). Example: 82 V d.c., the reference becomes LC1 BP33082DC22. For coil characteristics, see pages 5/188 to 5/191.

Selection:
pages 5/194 to 5/217

Characteristics:
pages 5/182 and 5/183


Dimensions and schemes:
pages 5/192 and 5/193

5/184

Schneider
Electric

References (continued)

TeSys contactors
TeSys LC1 B contactors



LC1 BP33

Contactors for control in category AC-1, from 800 to 2750 A (\sim or $=$) (continued)						
Single, 2, 3 or 4-pole contactors		Number of poles	Instantaneous auxiliary contacts		Basic reference, to be completed by adding the voltage code (1)	Weight
Maximum operational current in AC-1 ($\theta \leq 40^\circ C$)	A		↓	↓		
1250		1	2	2	LC1 BM31•22	31.000
			3	1	LC1 BM31•31	31.000
			1	3	LC1 BM31•13	31.000
			4	—	LC1 BM31•40	31.000
		2	2	2	LC1 BM32•22	44.000
			3	1	LC1 BM32•31	44.000
			1	3	LC1 BM32•13	44.000
			4	—	LC1 BM32•40	44.000
		3	2	2	LC1 BM33•22	57.000
			3	1	LC1 BM33•31	57.000
			1	3	LC1 BM33•13	57.000
			4	—	LC1 BM33•40	57.000
		4	2	2	LC1 BM34•22	71.000
			3	1	LC1 BM34•31	71.000
			1	3	LC1 BM34•13	71.000
			4	—	LC1 BM34•40	71.000
2000		1	2	2	LC1 BP31•22	41.000
			3	1	LC1 BP31•31	41.000
			1	3	LC1 BP31•13	41.000
			4	—	LC1 BP31•40	41.000
		2	2	2	LC1 BP32•22	65.000
			3	1	LC1 BP32•31	65.000
			1	3	LC1 BP32•13	65.000
			4	—	LC1 BP32•40	65.000
		3	2	2	LC1 BP33•22	94.000
			3	1	LC1 BP33•31	94.000
			1	3	LC1 BP33•13	94.000
			4	—	LC1 BP33•40	94.000
		4	2	2	LC1 BP34•22	120.000
			3	1	LC1 BP34•31	120.000
			1	3	LC1 BP34•13	120.000
			4	—	LC1 BP34•40	120.000
2750		1	2	2	LC1 BR31•22	52.000
			3	1	LC1 BR31•31	52.000
			1	3	LC1 BR31•13	52.000
			4	—	LC1 BR31•40	52.000
		2	2	2	LC1 BR32•22	85.000
			3	1	LC1 BR32•31	85.000
			1	3	LC1 BR32•13	85.000
			4	—	LC1 BR32•40	85.000
		3	2	2	LC1 BR33•22	129.000
			3	1	LC1 BR33•31	129.000
			1	3	LC1 BR33•13	129.000
			4	—	LC1 BR33•40	129.000
		4	2	2	LC1 BR34•22	160.000
			3	1	LC1 BR34•31	160.000
			1	3	LC1 BR34•13	160.000
			4	—	LC1 BR34•40	160.000

(1) See previous page.

5

Selection:
pages 5/194 to 5/217

Characteristics:
pages 5/182 and 5/183

Dimensions and schemes:
pages 5/192 and 5/193

Schneider
Electric


5/185

References


TeSys contactors

TeSys LC1 B contactors


Accessories and spare parts




ZC4 GM1




PA1 LB80
(PA1 LB76 + PA1 LB75)



PA1 LB89

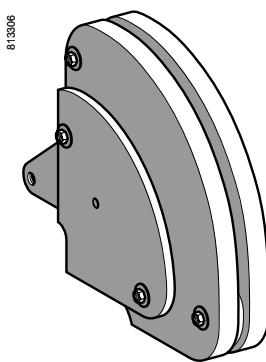

PA1 LB50

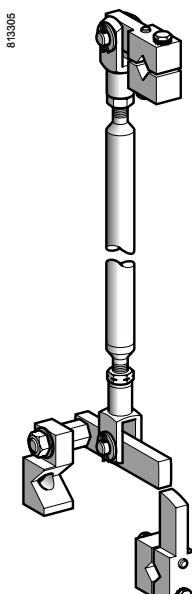

EZ2 LB0601

5

Spare parts

Description	For contactor	Composition	Reference	Weight kg
Instantaneous auxiliary contact blocks	LC1 B	1 N/O	ZC4 GM1	0.030
		1 N/C	ZC4 GM2	0.030
Description	For contactor	Number of sets required per contactor pole	Set reference	Weight kg
Set of contacts (1 moving contact, 1 fixed contact)	LC1 BL	1	PA1 LB80	0.420
	LC1 BM	1	PA1 LB80	0.420
	LC1 BP	2	PA1 LB80	0.420
	LC1 BR	3	PA1 LB80	0.420
Description	For contactor		Reference	Weight kg
Moving contact only (for 1 finger)	LC1 B		PA1 LB75	0.220
Fixed contact only (for 1 finger)	LC1 B		PA1 LB76	0.200
Blow-out horn only (for 1 finger)	LC1 B		PA1 LB89	0.120
Arc chamber (for 1 contactor pole)	LC1 BL		PA1 LB50	3.700
	LC1 BM		PA1 LB50	3.700
	LC1 BP		PA1 PB50	6.200
	LC1 BR		PA1 RB50	8.500

Mounting accessories

Description	For contactor	Sold in lots of	Unit reference	Weight kg
Bar support bracket for mounting on 120 or 150 mm centres	LC1 BL to BR	2	LA9 B103	1.620

Assembly of two vertically mounted contactors by the customer

Description	For contactor	Reference	Weight kg
Mechanical interlock and locking device components	LC1 B	EZ2 LB0601	1.280

Specifications

- Positive mechanical interlock between two vertically mounted contactors of the same or different ratings.
- Connecting rod with cranks mounted on the right-hand, pole side.
- Vertical fixing centres of the two contactors: 600 mm.

Description	Specification	Height mm	Sold in lots of	Unit reference	Weight kg
Notched mounting rails used as uprights and as equipment support	2 mm steel, with zinc chromate treatment	1650	4	AM1 EC165	2.460
		1850	4	AM1 EC185	2.760
		2000	4	AM1 EC200	2.980
1/4 turn sliding clip nut and corresponding screw for assembly of rails AM1 EC	M8	—	10	AF1 CD081	0.020
	M8 x 18	—	10	AF1 VC820	0.024

Selection :
pages 5/194 to 5/217

Characteristics :
pages 5/182 and 5/183

Dimensions and schemes :
pages 5/192 and 5/193

5/186


Schneider
Electric

Adjustment characteristics


TeSys contactors TeSys LC1 B contactors

Electromagnet

Electromagnet EB5 KB50




Adjustment of pick-up travel and pull-in travel




Poles

Complete pole

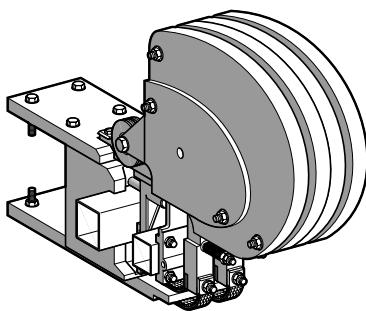

N/O pole

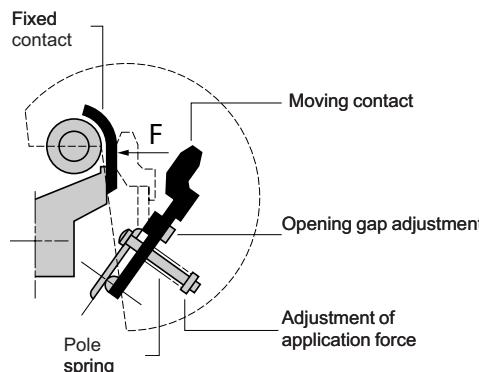

5

— or ~ supply adjustment characteristics with economy resistor (and rectifier on ~)

Contactor type		LC1 BL	LC1 BM	LC1 BP	LC1 BR
Electromagnet	EB5 KB50	EB5 KB50	EB5 KB50	EB5 KB50	EB5 KB50
Pick-up travel (E)	mm	30	30	30	30
Pull-in travel (e)	mm	10	10	10	10
Coil		WB1 KB***	WB1 KB***	WB1 KB***	WB1 KB***
Pull-in voltage	V	0.75 Uc	0.75 Uc	0.75 Uc	0.75 Uc
Drop-out voltage	V	0.3...0.5 Uc	0.3...0.5 Uc	0.3...0.5 Uc	0.3...0.5 Uc
N/O pole	1-pole	daN	30	30 (1)	30 (2)
Adjustment of application force (F) on the contact per pole according to contactor composition	2-pole	daN	30	30 (1)	30 (2)
	3-pole	daN	30	30 (1)	30 (2)
	4-pole	daN	30	30 (1)	30 (2)

(1) Each pole has 2 contacts; the force must be applied evenly to each of these contacts.

(2) Each pole has 3 contacts; the force must be applied evenly to each of these contacts.

Selection :
pages 5/194 to 5/217

References :
pages 5/184 to 5/186

Dimensions and schemes :
pages 5/192 and 5/193

Schneider
Electric

5/187

References

TeSys contactors

TeSys LC1 B contactors

Replacement coils and accessories for single-pole contactors

References

The same coils are used for $\perp\!\!\!/\!$ or \sim contactor control supply.

- For d.c. operation, the following must be associated with the coil:
- 1 economy resistor arrangement (resistors + 1 or 2 auxiliary contact(s) or 1 contactor).
- For 50 to 400 Hz a.c. operation, the following must be associated with the coil:
- 1 individual rectifier (to be wired),
- 1 economy resistor arrangement (resistors + auxiliary contact(s) or 1 contactor) wired into the rectified current side.


Operating range min-max (1)		Coil		Economy resistor			Rectifier (for \sim only)	Coil	Weight
d.c.	a.c.	Resis- tance at 20 °C $\pm 10\%$	I inrush $\pm 10\%$ at Un max	Resistor Unit reference	Total resis- tance	Contact Qty	Reference	Reference	
V	V	Ω	A	Ω					kg
47-51	—	5.1	10.3	DR2 SC0270	270	1	ZC4 GM2	—	WB1 KB155 1.120
52-56	—	5.9	9.5	DR2 SC0330	330	1	ZC4 GM2	—	WB1 KB132 1.120
57-64	—	7.3	8.9	DR2 SC0390	390	1	ZC4 GM2	—	WB1 KB123 1.120
65-68	—	9.5	7.1	DR2 SC0560	560	1	ZC4 GM2	—	WB1 KB133 1.120
69-79	—	11.6	6.9	DR2 SC0680	680	1	ZC4 GM2	—	WB1 KB121 1.120
80-87	—	16.2	5.3	DR2 SC0820	820	1	ZC4 GM2	—	WB1 KB130 1.120
88-94	—	19.9	4.7	DR2 SC1000	1000	1	ZC4 GM2	—	WB1 KB140 1.120
95-108	110-125	25.5	4.3	DR2 SC1200	1200	1	ZC4 GM2	DR5 TE1U	WB1 KB134 1.120
109-136	126-155	33.1	4.2	DR2 SC1800	1800	1	ZC4 GM2	DR5 TE1U	WB1 KB124 1.120
137-151	156-173	50.9	3	DR2 SC2700	2700	2	ZC4 GM2	DR5 TE1U	WB1 KB122 1.120
152-166	174-191	61.36	2.7	DR2 SC3300	3300	2	ZC4 GM2	DR5 TE1U	WB1 KB135 1.120
167-189	192-216	78.4	2.4	DR2 SC3900	3900	2	ZC4 GM2	DR5 TE1U	WB1 KB136 1.120
190-221	217-256	94.8	2.3	DR2 SC4700	4700	2	ZC4 GM2	DR5 TE1U	WB1 KB139 1.120
222-243	257-280	123.9	1.9	DR2 SC6800	6800	1	LC1 DT20 LDS135	DR5 TE1U	WB1 KB125 1.120
244-267	281-307	159.9	1.7	DR2 SC8200	4700 + 3300	1	LC1 DT20 LDS135	DR5 TE1S	WB1 KB137 1.120
268-318	308-365	199.6	1.6	DR2 SC1001	5600 + 4700	1	LC1 DT20 UDS135	DR5 TE1S	WB1 KB126 1.120
319-405	366-463	247.4	1.6	DR2 SC1201	6800 + 5600	1	LC1 DT20 TDS135	DR5 TE1S	WB1 KB138 1.120
406-446	464-500	382	1.1 (2)	DR2 SC1001	20 000	1	LC1 DT20 VDS135	DR5 TE1S	WB1 KB127 1.120
447-500	—	506.7	1 (3)	DR2 SC1201	24 000	1	LC1 DT20 RDS135	—	WB1 KB128 1.120

Specifications

- Average coil consumption (low sealed consumption):
- d.c.: inrush 380...520 W, sealed 0.15...0.20 W
- a.c. (with rectifier): inrush 450...620 VA, sealed 0.15...0.20 VA
- Time constant when sealed 25 ms
- Economy resistor consumption: 7...10 W
- Operating cycles/hour at $0 \leq 55^{\circ}\text{C} \leq 120$
- Mechanical durability at Uc: 1.2 million operating cycles
- With a.c. operation: good resistance to voltage drop on inrush, non susceptibility to micro-breaks, mains harmonics: level ≤ 7 .

(1) For supply voltages of less than 110 V, beware of voltage drops caused by the inrush current.
(2) 2 resistors in series: 2 x 10 000 Ω .
(3) 2 resistors in series: 2 x 12,000 Ω .

522634



WB1 KB***

5

References

TeSys contactors

TeSys LC1 B contactors

Replacement coils and accessories
for 2-pole contactors

References

The same coils are used for --- or \sim contactor control supply.

- For d.c. operation, the following must be associated with the coil:
- 1 economy resistor arrangement (resistors + 1 or 2 auxiliary contact(s) or 1 contactor).
- For 50 to 400 Hz a.c. operation, the following must be associated with the coil:
- 1 individual rectifier (to be wired),
- 1 economy resistor arrangement (resistors + auxiliary contact(s) or 1 contactor) wired into the rectified current side.


Operating range min-max (1)		Coil		Economy resistor			Rectifier (for \sim only)	Coil	Weight
d.c.	a.c.	Resis- tance at 20 °C $\pm 10\%$	I inrush at Un $\pm 10\%$ max	Resistors (2 in series) Unit reference	Total resis- tance	Contact Qty	Reference	Reference	
V	V	Ω	A		Ω				kg
48-51	—	3.22	15.8	DR2 SC0068	2x68	1	ZC4 GM2	—	WB1 KB141 1.120
52-56	—	4.04	13.8	DR2 SC0082 DR2 SC0100	82 + 100	1	ZC4 GM2	—	WB1 KB142 1.120
57-62	—	4.96	12.5	DR2 SC0100 DR2 SC0120	100 + 120	1	ZC4 GM2	—	WB1 KB155 1.120
63-68	—	5.86	11.6	DR2 SC0120	2x120	1	ZC4 GM2	—	WB1 KB132 1.120
69-79	—	7.2	11	DR2 SC0150	2 x 150	1	ZC4 GM2	—	WB1 KB123 1.120
80-85	—	9.6	8.8	DR2 SC0180 DR2 SC0220	180 + 220	1	ZC4 GM2	—	WB1 KB133 1.120
86-98	99-113	11.4	8.6	DR2 SC0220 DR2 SC0270	220 + 270	1	ZC4 GM2	—	WB1 KB121 1.120
99-108	114-125	16.3	6.6	DR2 SC0330	2x330	1	ZC4 GM2	DR5 TE1U	WB1 KB130 1.120
109-119	126-136	19.7	6	DR2 SC0390	2x390	1	ZC4 GM2	DR5 TE1U	WB1 KB140 1.120
120-136	137-156	25.2	5.4	DR2 SC0470	2x470	2	ZC4 GM2	DR5 TE1U	WB1 KB134 1.120
137-173	157-196	32.5	5.3	DR2 SC0680	2x680	2	ZC4 GM2	DR5 TE1U	WB1 KB124 1.120
174-191	197-216	49.7	3.8	DR2 SC1000	2x1000	2	ZC4 GM2	DR5 TE1U	WB1 KB122 1.120
192-210	217-238	61	3.4	DR2 SC1200	2x1200	2	ZC4 GM2	DR5 TE1U	WB1 KB135 1.120
211-238	239-272	77.2	3	DR2 SC1500 DR2 SC1800	1500 + 1800	2	ZC4 GM2	DR5 TE1U	WB1 KB136 1.120
239-279	273-318	94	3	DR2 SC1800 DR2 SC2200	1800 + 2200	1	LP1 DT20 LDS135	DR5 TE1S	WB1 KB139 1.120
280-310	319-359	128	2.4	DR2 SC2700	2x2700	1	LP1 DT20 UDS135	DR5 TE1S	WB1 KB125 1.120
311-341	360-387	160	2.1	DR2 SC3300	2x3300	1	LP1 DT20 TDS135	DR5 TE1S	WB1 KB137 1.120
342-399	388-452	197	2	DR2 SC3900	2x3900	1	LP1 DT20 TDS135	DR5 TE1S	WB1 KB126 1.120
400-500	453-500	257	1.9	DR2 SC4700 DR2 SC5600	4700 + 5600	1	LP1 DT20 VDS135	DR5 TE1S	WB1 KB138 1.120

Specifications

- Average coil consumption (low sealed consumption):
- d.c.: inrush 600...800 W, sealed 0.35...0.5 W
- a.c. (with rectifier): inrush 720...1000 VA, sealed 0.35...0.5 VA
- Time constant when sealed 25 ms
- Economy resistor consumption: 15...20 W
- Operating cycles/hour at $0 \leq 55^{\circ}\text{C}$: ≤ 120
- Mechanical durability at U_c : 1.2 million operating cycles
- With a.c. operation: good resistance to voltage drop on inrush, non susceptibility to micro-breaks, mains harmonics: level ≤ 7 .

(1) For supply voltages of less than 110 V, beware of voltage drops caused by the inrush current.

522634



WB1 KB***

5

References

TeSys contactors

TeSys LC1 B contactors

Replacement coils and accessories
for 3-pole contactors

References

The same coils are used for --- or \sim contactor control supply.


- For d.c. operation, the following must be associated with the coil:
- 1 economy resistor arrangement (resistors + 1 or 2 auxiliary contact(s) or 1 contactor).
- For 50 to 400 Hz a.c. operation, the following must be associated with the coil:
- 1 individual rectifier (to be wired),
- 1 economy resistor arrangement (resistors + auxiliary contact(s) or 1 contactor) wired into the rectified current side.

Operating range min-max (1)		Coil		Economy resistor			Rectifier (for \sim only)	Coil Reference	Weight kg
d.c.	a.c.	Resis- tance at 20 °C $\pm 10\%$	I inrush $\pm 10\%$ at Un max	Resistors (2 in parallel or in series) Unit reference	Total resis- tance	Contact Qty	Reference	Reference	
V	V	Ω	A		Ω				kg
47-50	-	1.85	27	DR2 SC0150	2x150//	1	ZC4 GM2	-	WB1 KB154 1.120
51-55	-	2.35	23.5	DR2 SC0180	2x180//	1	ZC4 GM2	-	WB1 KB153 1.120
56-60	-	3.22	18.5	DR2 SC0220	2x220//	1	ZC4 GM2	-	WB1 KB141 1.120
61-66	-	4.04	16	DR2 SC0270	2x270//	1	ZC4 GM2	-	WB1 KB142 1.120
67-72	-	4.96	14.5	DR2 SC0330	2x330//	1	ZC4 GM2	-	WB1 KB155 1.120
73-79	-	5.86	13.5	DR2 SC0100	2x100	1	ZC4 GM2	-	WB1 KB132 1.120
80-92	-	7.2	12.8	DR2 SC0120	2x120	1	ZC4 GM2	-	WB1 KB123 1.120
93-98	108-113	9.6	10.2	DR2 SC0150 DR2 SC0180 + 180	150 180	1	ZC4 GM2	DR5 TE1U	WB1 KB133 1.120
99-114	114-132	11.4	10	DR2 SC0180 DR2 SC0220 + 220	180 220	1	ZC4 GM2	DR5 TE1U	WB1 KB121 1.120
115-126	133-145	16.3	7.7	DR2 SC0270	2x270	2	ZC4 GM2	DR5 TE1U	WB1 KB130 1.120
127-139	146-160	11.7	7	DR2 SC0330	2x330	2	ZC4 GM2	DR5 TE1U	WB1 KB140 1.120
140-159	161-181	25.2	6.3	DR2 SC0390 DR2 SC0470	390 + 470	2	ZC4 GM2	DR5 TE1U	WB1 KB134 1.120
160-201	182-228	32.2	6.2	DR2 SC0560	2x560	2	ZC4 GM2	DR5 TE1U	WB1 KB124 1.120
202-222	229-255	49.7	4.5	DR2 SC0820	2x820	2	ZC4 GM2	DR5 TE1U	WB1 KB122 1.120
223-246	256-282	61	4	DR2 SC1000	2x1000	1	LC1 DT20 LDS135	DR5 TE1S	WB1 KB135 1.120
247-277	283-316	77.2	3.6	DR2 SC1200	2x1200	1	LC1 DT20 LDS135	DR5 TE1S	WB1 KB136 1.120
278-327	317-372	94	3.5	DR2 SC1500	2x1500	1	LC1 DT20 UDS135	DR5 TE1S	WB1 KB139 1.120
328-360	373-408	128	2.8	DR2 SC1500	3x1500	1	LC1 DT20 TDS135	DR5 TE1S	WB1 KB125 1.120
361-399	409-452	160	2.5	DR2 SC1800	3x1800	1	LC1 DT20 VDS135	DR5 TE1S	WB1 KB137 1.120
400-469	453-500	197	2.4	DR2 SC2200	3x2200	1	LC1 DT20 VDS135	DR5 TE1S	WB1 KB126 1.120
470-500	-	257	1.9	DR2 SC2700	3x2700	1	LC1 DT20 RDS135	-	WB1 KB138 1.120

Specifications

- Average coil consumption (low sealed consumption):
- d.c.: inrush 900...1100 W, sealed 0.7...1 W
- a.c. (with rectifier): inrush 1100...1300 VA, sealed 0.7...1 VA
- Time constant when sealed 25 ms
- Economy resistor consumption: 24...30 W
- Operating cycles/hour at $\theta \leq 55^\circ\text{C}$: ≤ 120
- Mechanical durability at U_c : 1.2 million operating cycles
- With a.c. operation: good resistance to voltage drop on inrush, non susceptibility to micro-breaks, mains harmonics: level ≤ 7 .

(1) For supply voltages of less than 110 V, beware of voltage drops caused by the inrush current.



References

TeSys contactors

TeSys LC1 B contactors

Replacement coils and accessories
for 4-pole contactors

References

The same coils are used for --- or \sim contactor control supply.

- For d.c. operation, the following must be associated with the coil:
 - 1 economy resistor arrangement (resistors + 1 or 2 auxiliary contact(s) or 1 contactor).
- For 50 to 400 Hz a.c. operation, the following must be associated with the coil:
 - 1 individual rectifier (to be wired),
 - 1 economy resistor arrangement (resistors + auxiliary contact(s) or 1 contactor) wired into the rectified current side.


Operating range min-max (1)		Coil		Economy resistor			Rectifier (for \sim only)	Coil	Weight	
d.c.	a.c.	Resis- tance at 20°C	I inrush $\pm 10\%$ at Un $\pm 10\%$ max	Resistors (3 in series) Reference	Total resis- tance unit	Contact Qty Reference	Reference	Reference		
V	V	Ω	A	Ω					kg	
57-61	—	2.35	26	DR2 SC0027	3x27	1	ZC4 GM2	—	WB1 KB153	1.120
62-67	—	3.22	21	DR2 SC0033	3x33	1	ZC4 GM2	—	WB1 KB141	1.120
68-73	—	4.04	18	DR2 SC0039	3x39	1	ZC4 GM2	—	WB1 KB142	1.120
74-81	—	4.96	16.3	DR2 SC0047	3x47	1	ZC4 GM2	—	WB1 KB155	1.120
82-89	—	5.86	15	DR2 SC0056	3x56	1	ZC4 GM2	—	WB1 KB132	1.120
90-102	105-119	7.2	14	DR2 SC0068	3x68	1	ZC4 GM2	DR5 TE1U	WB1 KB123	1.120
103-111	120-128	9.6	11.5	DR2 SC0100	3x100	2	ZC4 GM2	DR5 TE1U	WB1 KB133	1.120
112-129	129-148	11.4	11.3	DR2 SC0100	3x100	2	ZC4 GM2	DR5 TE1U	WB1 KB121	1.120
130-143	149-163	16.3	8.7	DR2 SC0150	3x150	2	ZC4 GM2	DR5 TE1U	WB1 KB130	1.120
144-157	164-179	19.7	8	DR2 SC0180	3x180	2	ZC4 GM2	DR5 TE1U	WB1 KB140	1.120
158-180	180-204	25.2	7.1	DR2 SC0220	3x220	2	ZC4 GM2	DR5 TE1U	WB1 KB134	1.120
181-226	205-259	32.5	6.9	DR2 SC0330	3x330	2	ZC4 GM2	DR5 TE1U	WB1 KB124	1.120
227-251	260-288	49.7	5	DR2 SC0470	3x470	1	LC1 DT20 LDS135	DR5 TE1S	WB1 KB122	1.120
252-278	289-317	61	4.5	DR2 SC0560	3x560	1	LC1 DT20 UDS135	DR5 TE1S	WB1 KB135	1.120
279-313	318-356	77.2	4	DR2 SC0680	3x680	1	LC1 DT20 UDS135	DR5 TE1S	WB1 KB136	1.120
314-368	357-418	94	3.9	DR2 SC0820	3x820	1	LC1 DT20 TDS135	DR5 TE1S	WB1 KB139	1.120
369-408	419-462	128	3.2	DR2 SC1200	3x1200	1	LC1 DT20 VDS135	DR5 TE1S	WB1 KB125	1.120
409-448	463-500	160	2.8	DR2 SC1500	3x1500	1	LC1 DT20 VDS135	DR5 TE1S	WB1 KB137	1.120
449-500	—	197	2.5	DR2 SC1800	3x1800	1	LC1 DT20 RDS135	—	WB1 KB126	1.120

Specifications

- Average coil consumption (low sealed consumption):
 - d.c.: inrush 1100...1400 W, sealed 1.2...1.6 W
 - a.c. (with rectifier): inrush 1300...1600 VA, sealed 1.2...1.6 VA
- Time constant when sealed 25 ms
- Economy resistor consumption: 35...45 W
- Operating cycles/hour at $0 \leq 55^\circ\text{C} \leq 120$
- Mechanical durability at Uc: 1.2 million operating cycles
- With a.c. operation: good resistance to voltage drop on inrush, non susceptibility to micro-breaks, mains harmonics: level ≤ 7 .

(1) For supply voltages of less than 110 V, beware of voltage drops caused by the inrush current.

522634




WB1 KB***

5


Dimensions

TeSys contactors TeSys LC1 B contactors


Single, 2, 3 or 4-pole contactors LC1 B
Common side view

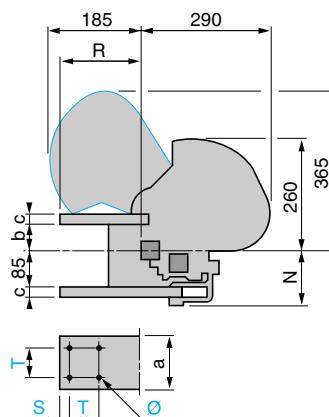

Single, 2 or 3-pole contactors
LC1 B•31, B•32 or B•33

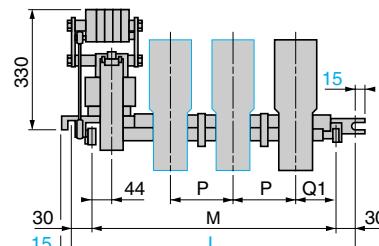


4-pole contactors LC1 B•34

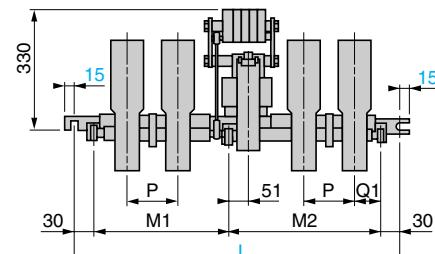

Number of poles	LC1 BL				LC1 BM				LC1 BP				LC1 BR			
	1	2	3	4	1	2	3	4	1	2	3	4	1	2	3	4
a	50	50	50	50	63	63	63	63	100	100	100	100	125	125	125	125
b	59	59	59	59	55	55	55	55	55	55	55	55	50	50	50	50
c	16	16	16	16	20	20	20	20	20	20	20	20	25	25	25	25
L	345	445	540	760	345	445	540	760	385	540	760	1065	445	635	885	1065
M	285	385	480	—	285	385	480	—	325	480	700	—	385	575	825	—
M1	—	—	—	308	—	—	—	308	—	—	—	455	—	—	—	455
M2	—	—	—	392	—	—	—	392	—	—	—	550	—	—	—	550
N	121	121	121	121	125	125	125	125	125	125	125	125	130	130	130	130
P	100	100	100	100	100	100	100	100	150	150	150	150	195	195	195	195
Q1	100	100	100	100	100	100	100	100	110	110	110	110	130	130	130	130
R	122	122	122	122	157	157	157	157	173	173	173	173	173	173	173	173
S	10	10	10	10	17	17	17	17	20	20	20	20	20	20	20	20
T	30	30	30	30	30	30	30	30	60	60	60	60	60	60	60	60
Ø	9	9	9	9	11	11	11	11	11	11	11	11	11	11	11	11

Electrical safety clearance


Values X1 and X2 are given for a breaking capacity of 10 In (\sim 3-phase supply).



\sim 3-phase voltage	LC1 BL		LC1 BM		LC1 BP		LC1 BR	
	X1	X2	X1	X2	X1	X2	X1	X2
380/440 V	100	150	100	150	150	200	200	250
500 V	100	150	100	150	150	200	200	250
660/690 V	150	200	150	200	200	250	200	250
1000 V	200	250	200	250	200	250	200	300

Mechanical interlock for assembling vertically mounted reversing contactors

EZ2 LB0601

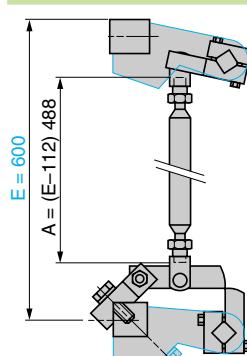

Selection :
pages 5/194 to 5/217

References :
pages 5/184 to 5/186

Schemes :
page 5/193


5/192

Schneider
Electric


Schemes

TeSys contactors TeSys LC1 B contactors

TeSys LC1 B contactors

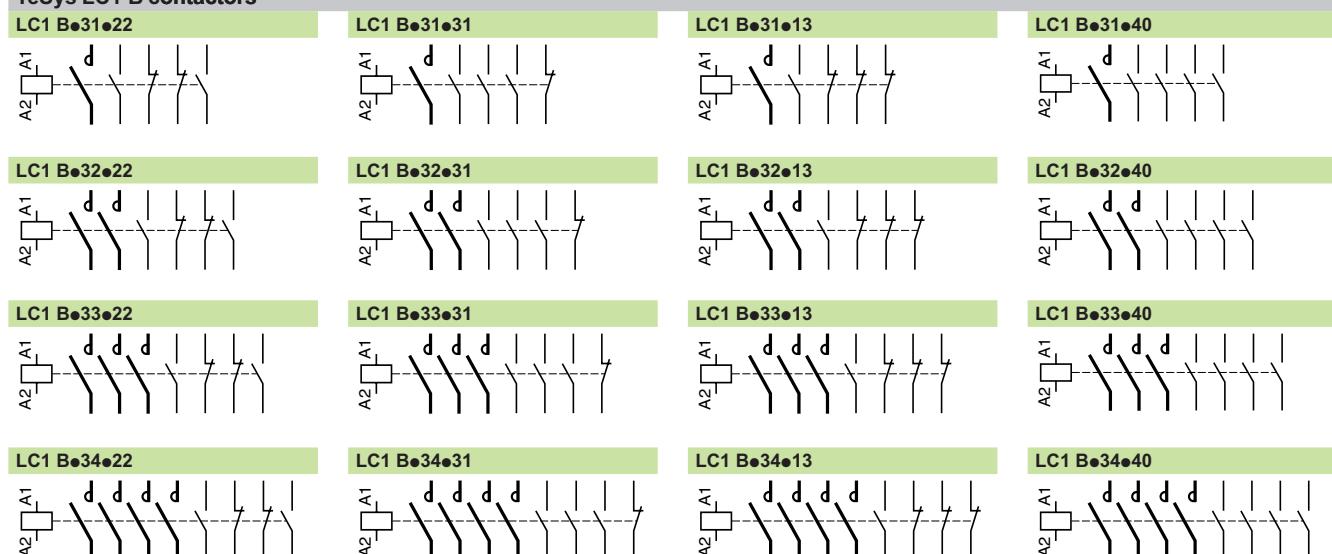


a.c. control circuit

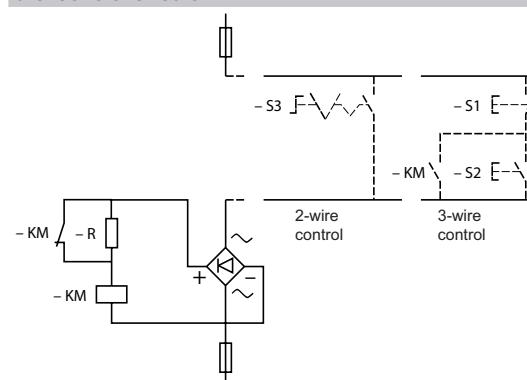

5

Dotted lines show optional wiring and external items required.

d.c. control circuit

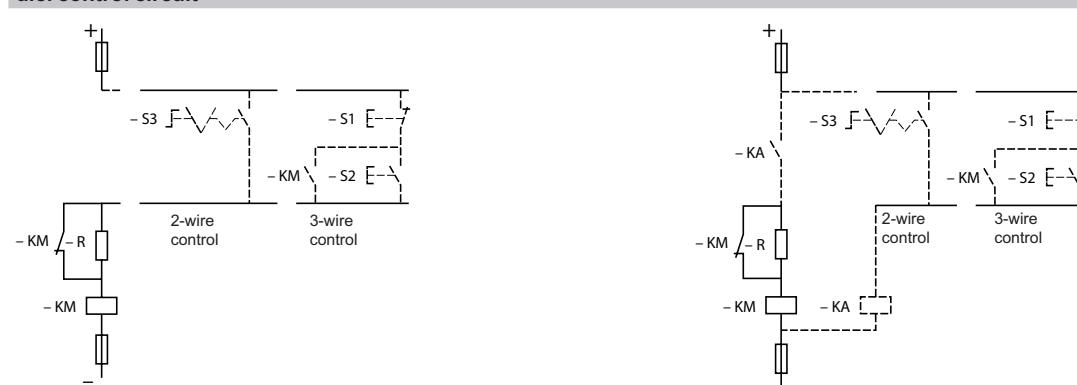

Note : It is essential to check that the control circuit contacts have ratings compatible with the voltage and power consumption of the operating coil of the contactor. If not, an intermediate "KA" relay must be fitted and wired as shown.

Dotted lines show optional wiring and external items required.

Selection :
pages 5/194 to 5/217

References :
pages 5/184 to 5/186

Dimensions :
page 5/192

Schneider
Electric

5/193

Selection

TeSys contactors For utilisation category AC-3

Operational current and power conforming to IEC ($\theta \leq 60^\circ\text{C}$)													
Contactor size			LC1/ LP1 K06	LC1/ LP1 K09	LC1 K12	LC1 K16	LC1 D09	LC1 D12	LC1 D18	LC1 D25	LC1 D32	LC1 D38	LC1 D40A
Maximum operational current in AC-3	$\leq 440\text{ V}$	A	6	9	12	16	9	12	18	25	32	38	40
Rated operational power P (standard motor power ratings)	220/240 V	kW	1.5	2.2	3	3	2.2	3	4	5.5	7.5	9	11
	380/400 V	kW	2.2	4	5.5	7.5	4	5.5	7.5	11	15	18.5	18.5
	415 V	kW	2.2	4	5.5	7.5	4	5.5	9	11	15	18.5	22
	440 V	kW	3	4	5.5	7.5	4	5.5	9	11	15	18.5	22
	500 V	kW	3	4	4	5.5	5.5	7.5	10	15	18.5	18.5	22
	660/690 V	kW	3	4	4	4	5.5	7.5	10	15	18.5	18.5	30
	1000 V	kW	—	—	—	—	—	—	—	—	—	—	—

Maximum operating rate in operating cycles/hour (1)												
On-load factor	Operational power					LC1 D09	LC1 D12	LC1 D18	LC1 D25	LC1 D32	LC1 D38	LC1 D40A
$\leq 85\%$	P	—	—	—	—	1200	1200	1200	1200	1000	1000	1000
	0.5 P	—	—	—	—	3000	3000	2500	2500	2500	2500	2500
$\leq 25\%$	P	—	—	—	—	1800	1800	1800	1800	1200	1200	1200

Operational current and power conforming to UL, CSA ($\theta \leq 60^\circ\text{C}$)												
Contactor size			LC1/ LP1 K06	LC1/ LP1 K09	LC1/ LP1 K12	LC1 D09	LC1 D12	LC1 D18	LC1 D25	LC1 D32	LC1 D38	LC1 D40A
Maximum operational current in AC-3	$\leq 440\text{ V}$	A	6	9	12	9	12	18	25	32	—	40
Rated operational power P (standard motor power ratings 60 Hz)	200/208 V	HP	1.5	2	3	2	3	5	7.5	10	—	10
	230/240 V	HP	1.5	3	3	2	3	5	7.5	10	—	10
	460/480 V	HP	3	5	7.5	5	7.5	10	15	20	—	30
	575/600 V	HP	3	5	10	7.5	10	15	20	25	—	30

(1) Depending on the operational power and the on-load factor ($\theta \leq 60^\circ\text{C}$).

LC1 D50A	LC1 D65A	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR
50	65	80	95	115	150	185	225	265	330	400	500	630	780	800	750	1000	1500	1800
15	18,5	22	25	30	40	55	63	75	100	110	147	200	220	250	220	280	425	500
22	30	37	45	55	75	90	110	132	160	200	250	335	400	450	400	500	750	900
25	37	45	45	59	80	100	110	140	180	220	280	375	425	450	425	530	800	900
30	37	45	45	59	80	100	110	140	200	250	295	400	425	450	450	560	800	900
30	37	55	55	75	90	110	129	160	200	257	355	400	450	450	500	600	750	900
33	37	45	45	80	100	110	129	160	220	280	335	450	475	475	560	670	750	900
-	-	45	45	65	75	100	100	147	160	185	335	450	450	450	530	530	670	750

LC1 D50A	LC1 D65A	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR
1000	1000	750	750	750	750	750	750	750	750	500	500	500	500	500	120	120	120	120
2500	2500	2000	2000	2000	1200	2000	2000	2000	2000	1200	1200	1200	1200	600	120	120	120	120
1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	600	120	120	120	120

LC1 D50A	LC1 D65A	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800
50	65	80	95	115	150	185	225	265	330	400	500	630	780	800
15	20	30	30	30	40	50	60	60	75	100	150	250	-	350
15	20	30	30	40	50	60	75	75	100	125	200	300	450	400
40	40	60	60	75	100	125	150	150	200	250	400	600	900	900
40	50	60	60	100	125	150	150	200	250	300	500	800	-	900

5

Selection (continued)


TeSys contactors

For utilisation category AC-3

Selection according to required electrical durability, in category AC-3 ($U_e \leq 440$ V)

Control of 3-phase asynchronous squirrel cage motors with breaking whilst running.

The current broken (I_c) in category AC-3 is equal to the rated operational current (I_e) of the motor.

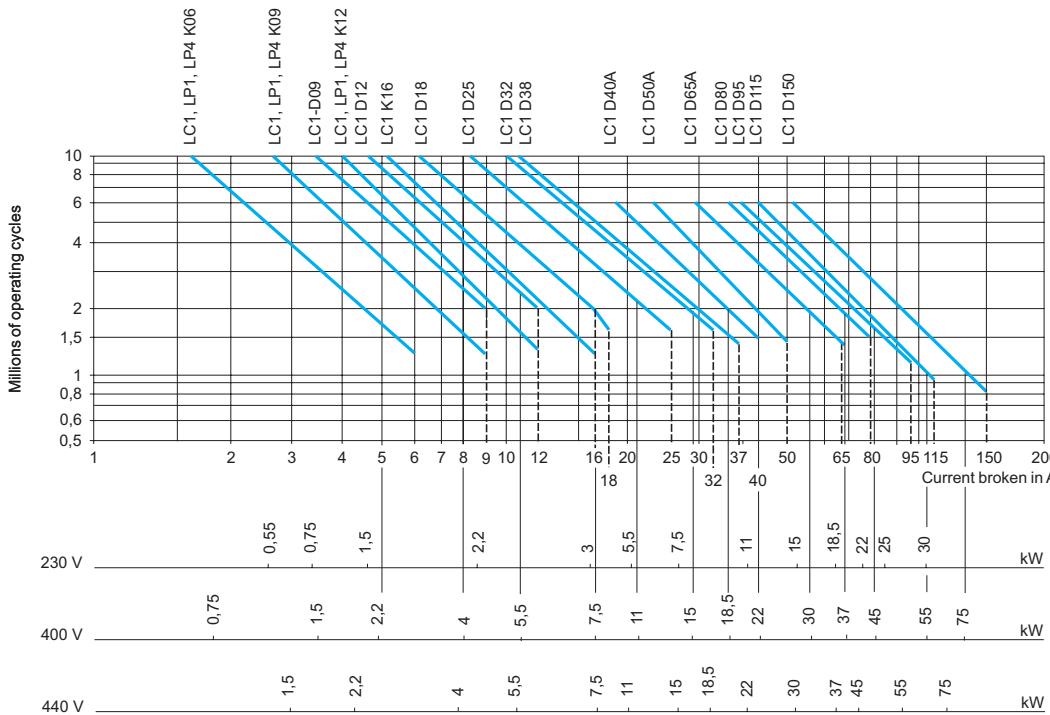

Operational power in kW-50 Hz.

Example:

Asynchronous motor with $P = 5.5$ kW - $U_e = 400$ V - $I_e = 11$ A - $I_c = I_e = 11$ A
or asynchronous motor with $P = 5.5$ kW - $U_e = 415$ V - $I_e = 11$ A - $I_c = I_e = 11$ A


3 million operating cycles required.

The above selection curves show the contactor rating needed: LC1 D18.

Selection according to required electrical durability, in category AC-3 ($U_e = 660/690$ V) (1)

Control of 3-phase asynchronous squirrel cage motors with breaking whilst running.

The current broken (I_c) in category AC-3 is equal to the rated operational current (I_e) of the motor.

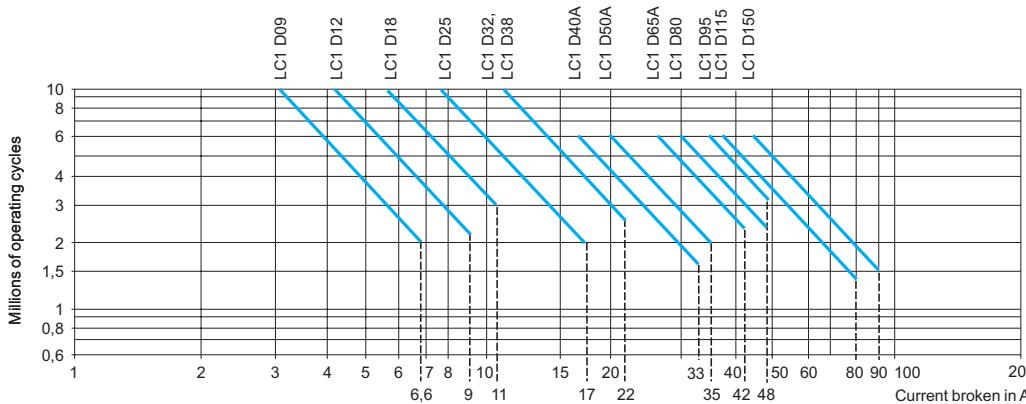

(1) For $U_e = 1000$ V, use the 660/690 V curves, but do not exceed the operational current at the operational power indicated for 1000 V.

Selection (continued)


TeSys contactors

For utilisation category AC-3

Selection according to required electrical durability, in category AC-3 ($U_e \leq 440$ V)

Control of 3-phase asynchronous squirrel cage motors with breaking whilst running.

The current broken (I_c) in category AC-3 is equal to the rated operational current (I_e) of the motor.

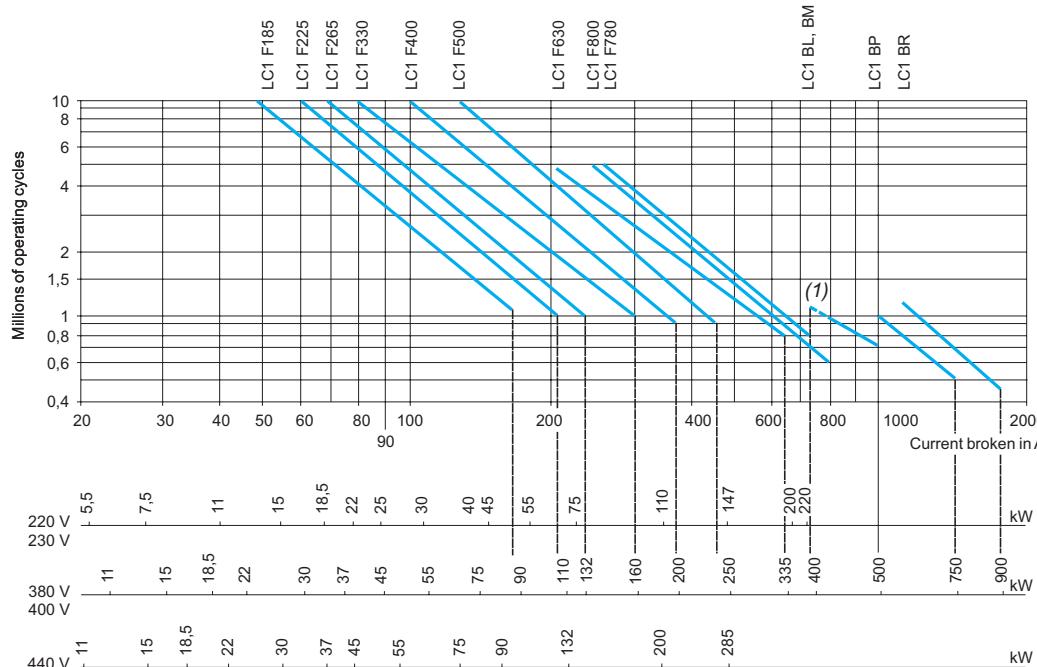

Operational power in kW-50 Hz.

Example:

Asynchronous motor with $P = 132$ kW - $U_e = 380$ V - $I_e = 245$ A - $I_c = I_e = 245$ A
or asynchronous motor with $P = 132$ kW - $U_e = 415$ V - $I_e = 240$ A - $I_c = I_e = 240$ A
1.5 million operating cycles required.


The above selection curves show the contactor rating needed: LC1 F330.

(1) The dotted lines are only applicable to LC1 BL contactors.

Selection according to required electrical durability, in category AC-3 ($U_e = 660/690$ V)

Control of 3-phase asynchronous squirrel cage motors with breaking whilst running.

The current broken (I_c) in category AC-3 is equal to the rated operational current (I_e) of the motor.

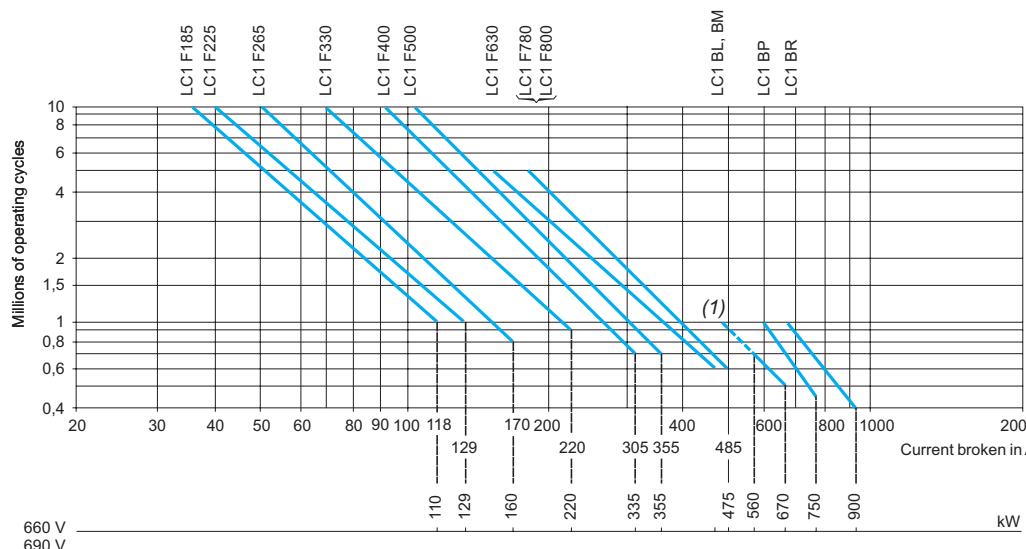

Example:

Asynchronous motor with $P = 132$ kW - $U_e = 660$ V - $I_e = 140$ A - $I_c = I_e = 140$ A
1.5 million operating cycles required.

The above selection curves show the contactor rating needed: LC1 F330.

(1) The dotted lines are only applicable to LC1 BL contactors.

Selection

TeSys contactors

For utilisation category AC-1

Maximum operational current (open-mounted device)


Contactor size		LC1/ LP1 K09	LC1/ LP1 K12	LC1/ D09	LC1/ DT20	LC1/ D12 DT25	LC1/ D18 DT32	LC1/ D25 DT40	LC1/ D32	LC1/ D38	LC1/ D40A DT60A
Maximum operating rate in operating cycles/hour		600	600	600	600	600	600	600	600	600	600
Connection conforming to IEC 60947-1	Cable c.s.a.	mm ²	4	4	4	4	6	6	10	10	35
	Bar c.s.a.	mm	—	—	—	—	—	—	—	—	—
Operational current in AC-1 in A, according to the ambient temperature conforming to IEC 60947-1	≤ 40 °C	A	20	20	25	20	25	32	40	50	50
	≤ 60 °C	A	20	20	25	20	25	32	40	50	50
	≤ 70 °C	A (at UC)	(1)	(1)	17	(1)	17	22	28	35	35
Maximum operational power ≤ 60 °C	220/230 V	kW	8	8	9	8	9	11	14	18	18
	240 V	kW	8	8	9	8	9	12	15	19	19
	380/400 V	kW	14	14	15	14	15	20	25	31	31
	415 V	kW	14	14	17	14	17	21	27	34	34
	440 V	kW	15	15	18	15	18	23	29	36	36
	500 V	kW	17	17	20	17	20	23	33	41	41
	660/690 V	kW	22	22	27	22	27	34	43	54	54
	1000 V	kW	—	—	—	—	—	—	—	—	—

(1) Please consult your Regional Sales Office.


Increase in operational current by parallel connection of poles

Apply the following coefficients to the currents or power values given above; these coefficients take into account an often unbalanced current distribution between the poles:

- 2 poles in parallel: K = 1.6
- 3 poles in parallel: K = 2.25
- 4 poles in parallel: K = 2.8



Selection according to required electrical durability, in category AC-1 (Ue ≤ 440 V)

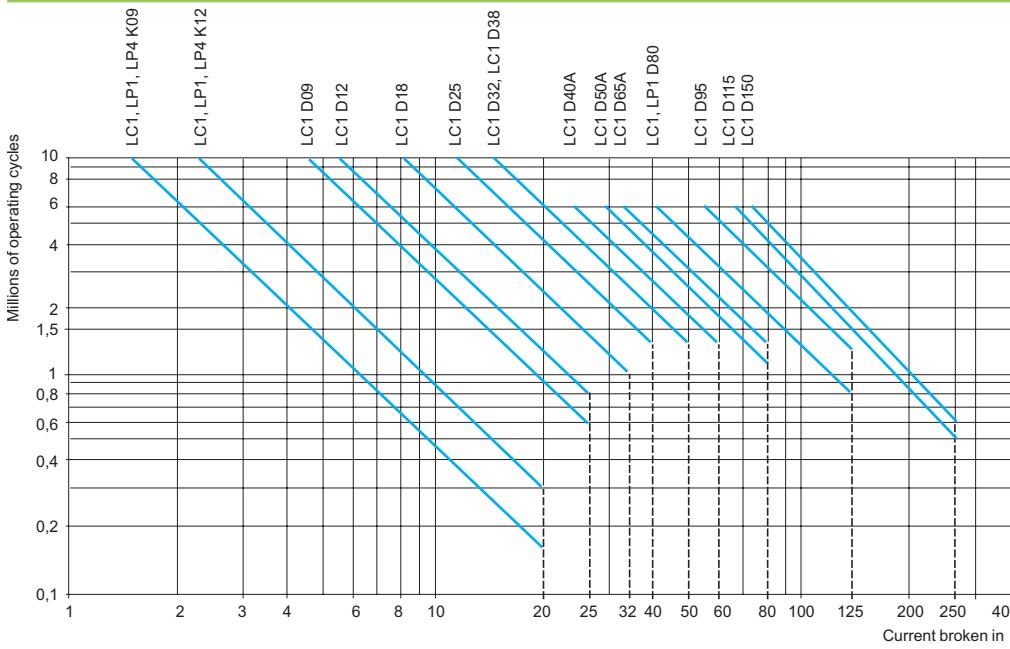

Control of resistive circuits ($\cos \varphi \geq 0.95$).


The current broken (Ic) in category AC-1 is equal to the current (Ie) normally drawn by the load.

Example:

- Ue = 220 V - Ie = 50 A θ ≤ 40 °C - Ic = Ie = 50 A.
- 2 million operating cycles required.
- The above selection curves show the contactor rating needed: either LC1 or LP1 D50.

LC1 D50A	LC1 D65A	LC1/ LP1 DT80A	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 F1700	LC1 F2100	LC1 BL	LC1 BM	LC1 BP	LC1 BR
600	600	600	600	600	600	600	600	600	600	600	600	600	600	600	200	200	120	120	120	120
35	35	50	50	120	120	150	185	185	240	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	2 30 x 5	2 40 x 5	2 60 x 5	2 100 x 5	2 60 x 5	3 100 x 5	4 100 x 5	2 50 x 5	2 80 x 5	2 100 x 5	100 x 10
80	80	125	125	250	250	275	315	350	400	500	700	1000	1600	1000	1700	2100	800	1250	2000	2750
(2)																				
80	80	125	125	200	200	275	280	300	360	430	580	850	1350	850	1450	1750	700	1100	1750	2400
56	56	80	80	160	160	180	200	250	290	340	500	700	1100	700	—	—	600	900	1500	2000
29	29	45	45	80	80	90	100	120	145	170	240	350	550	350	570	700	300	425	700	1000
31	31	49	49	83	83	100	110	125	160	180	255	370	570	370	600	780	330	450	800	1100
50	50	78	78	135	135	165	175	210	250	300	430	600	950	600	1000	1200	500	800	1200	1600
54	54	85	85	140	140	170	185	220	260	310	445	630	1000	630	1050	1300	525	825	1250	1700
58	58	90	90	150	150	180	200	230	290	330	470	670	1050	670	1100	1350	550	850	1400	2000
65	65	102	102	170	170	200	220	270	320	380	660	750	1200	750	1250	1550	600	900	1500	2100
80	80	135	135	235	235	280	300	370	400	530	740	1000	1650	1000	1700	2100	800	1100	1900	2700
—	—	120	120	345	345	410	450	540	640	760	950	1500	2400	1500	2500	3100	1100	1700	3000	4200

(2) With set of right-angled connectors LA9 F2100.

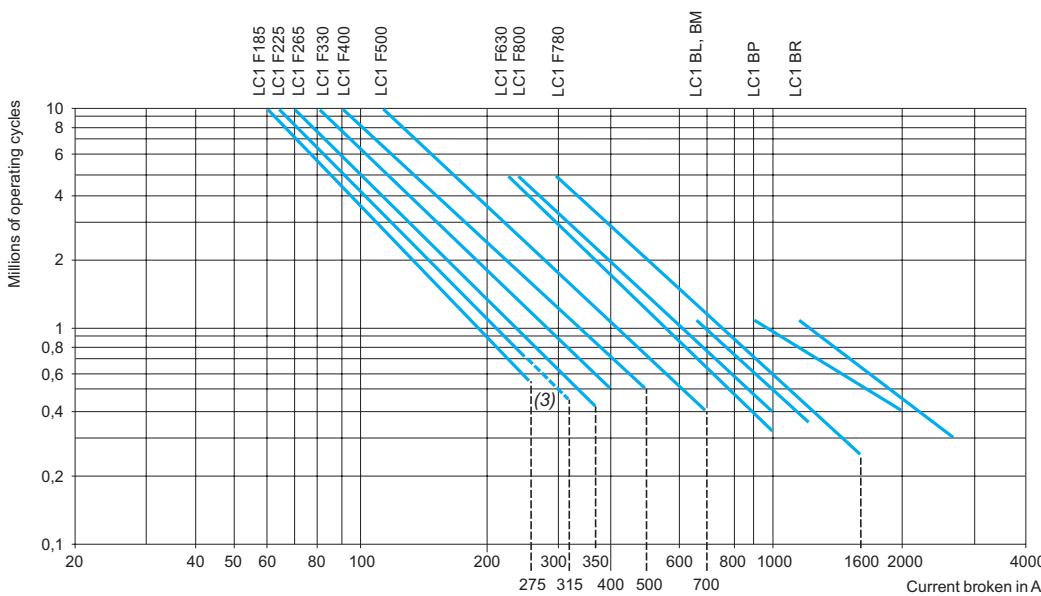

Example:

- $U_e = 220 \text{ V}$ - $I_e = 500 \text{ A}$ - $\theta \leq 40^\circ \text{ C}$ - $I_c = I_e = 500 \text{ A}$.
- 2 million operating cycles required.
- The above selection curves show the contactor rating needed: LC1 F780.

(3) The dotted lines are only applicable to LC1 F225.

Selection

TeSys contactors

For utilisation categories AC-2 or AC-4

Maximum breaking current

Category AC-2: slip ring motors - breaking the starting current.

Category AC-4: squirrel cage motors - breaking the starting current.

Contactor size		LC1/ LP1 K06	LC1/ LP1 K09	LC1/ LP1 K12	LC1 D09	LC1 D12	LC1 D18	LC1 D25	LC1 D32	LC1 D38	LC1 D40A
In category AC-4 (Ie max)	Ue ≤ 440 V Ie max broken = 6 x I motor	A	36	54	54	54	72	108	150	192	192
	440 V < Ue ≤ 690 V Ie max broken = 6 x I motor	A	26	40	40	40	50	70	90	105	105
Depending on the maximum operating rate (1) and the on-load factor, θ ≤ 60 °C (2)											
From 150 and 15 % to 300 and 10 %		A	20	30	30	30	40	45	75	80	80
From 150 and 20 % to 600 and 10 %		A	18	27	27	27	36	40	67	70	70
From 150 and 30 % to 1200 and 10 %		A	16	24	24	24	30	35	56	60	60
From 150 and 55 % to 2400 and 10 %		A	13	19	19	19	24	30	45	50	62
From 150 and 85 % to 3600 and 10 %		A	10	16	16	16	21	25	40	45	53

(1) Do not exceed the maximum number of operating cycles..

(2) For temperatures higher than 60 °C, use a maximum operating rate value equal to 80% of the actual value when selecting from the tables.

Counter current braking (plugging)

The current varies from the maximum plug-braking current to the rated motor current.

The making current must be compatible with the rated making and breaking capacities of the contactor.

5

As breaking normally takes place at a current value at or near the locked rotor current, the contactor can be selected using the criteria for categories AC-2 and AC-4.

Permissible AC-4 power rating for 200 000 operating cycles

Operational voltage		LC•/ LP• K06	LC•/ LP• K09	LC•/ LP• K12	LC• D09	LC• D12	LC• D18	LC• D25	LC• D32	LC• D38	LC• D40A
220/230 V	kW	0.75	1.1	1.1	1.5	1.5	2.2	3	4	4	4
380/400 V	kW	1.5	2.2	2.2	2.2	3.7	4	5.5	7.5	7.5	9
415 V	kW	1.5	2.2	2.2	2.2	3	3.7	5.5	7.5	7.5	9
440 V	kW	1.5	2.2	2.2	2.2	3	3.7	5.5	7.5	7.5	11
500 V	kW	2.2	3	3	3	4	5.5	7.5	9	9	11
660/690 V	kW	3	4	4	4	5.5	7.5	10	11	11	15

لیست قیمت محصولات

LC1 D50A	LC1 D65A	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F26	LC1 F330	LC1 F40	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR
300	390	480	570	630	830	1020	1230	1470	1800	2220	2760	3360	4260	3690	4320	5000	7500	9000
170	210	250	250	540	640	708	810	1020	1410	1830	2130	2760	2910	2910	4000	4800	5400	6600

140	160	200	200	280	310	380	420	560	670	780	1100	1400	1600	1600	2250	3000	4500	5400
120	148	170	170	250	280	350	400	500	600	700	950	1250	1400	1400	2000	2400	3750	5000
100	132	145	145	215	240	300	330	400	500	600	750	950	1100	1100	1500	2000	3000	3600
80	110	120	120	150	170	240	270	320	390	450	600	720	820	820	1000	1500	2000	2500
70	90	100	100	125	145	170	190	230	290	350	500	660	710	710	750	1000	1500	1800

LC• D50A	LC• D65A	LC• D80	LC• D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR
5.5	7.5	7.5	9	9	11	18.5	22	28	33	40	45	55	63	63	90	110	150	200
11	11	15	15	18.5	22	33	40	51	59	75	80	100	110	110	160	160	220	250
11	11	15	15	18.5	22	37	45	55	63	80	90	100	110	110	160	160	250	280
11	15	15	15	18.5	22	37	45	59	63	80	100	110	132	132	160	200	250	315
15	15	22	22	30	37	45	55	63	75	90	110	132	150	150	180	200	250	355
15	18.5	25	25	30	45	63	75	90	110	129	140	160	185	185	200	250	315	450

Selection (continued)

TeSys contactors


For utilisation categories AC-2 or AC-4

Selection according to required electrical durability, in categories AC-2 or AC-4 ($U_e \leq 440$ V)

Control of 3-phase asynchronous squirrel cage motors (AC-4) or slip ring motors (AC-2) with breaking whilst motor stalled.

The current broken (I_c) in AC-2 is equal to $2.5 \times I_e$.

The current broken (I_c) in AC-4 is equal to $6 \times I_e$. (I_e = rated operational current of the motor).

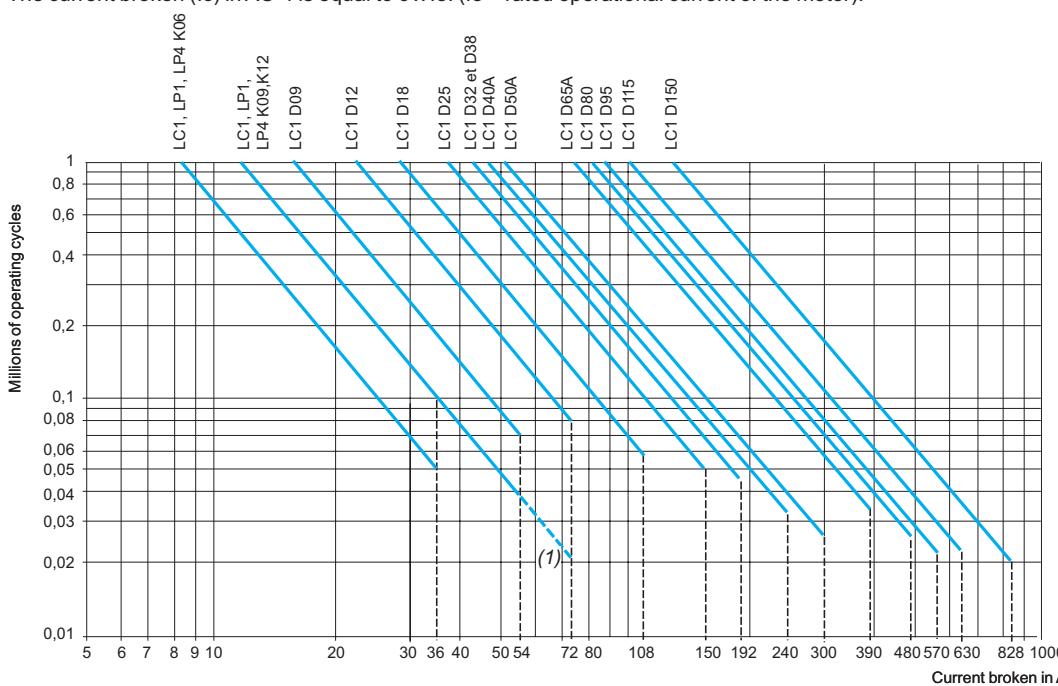

5

Example:

- Asynchronous motor with $P = 5.5$ kW - $U_e = 400$ V - $I_e = 11$ A. $I_c = 6 \times I_e = 66$ A
- or asynchronous motor with $P = 5.5$ kW - $U_e = 415$ V - $I_e = 11$ A. $I_c = 6 \times I_e = 66$ A.
- 200 000 operating cycles required.
- The above selection curves show the contactor rating needed: LC1 D25.


(1) The dotted lines are only applicable to LC1, LP1 K12 contactors.

Selection according to required electrical durability, use in category AC-4 (440 V < $U_e \leq 690$ V)

Control of 3-phase asynchronous squirrel cage motors with breaking whilst motor stalled

The current broken (I_c) in AC-2 is equal to $2.5 \times I_e$.

The current broken (I_c) in AC-4 is equal to $6 \times I_e$. (I_e = rated operational current of the motor).

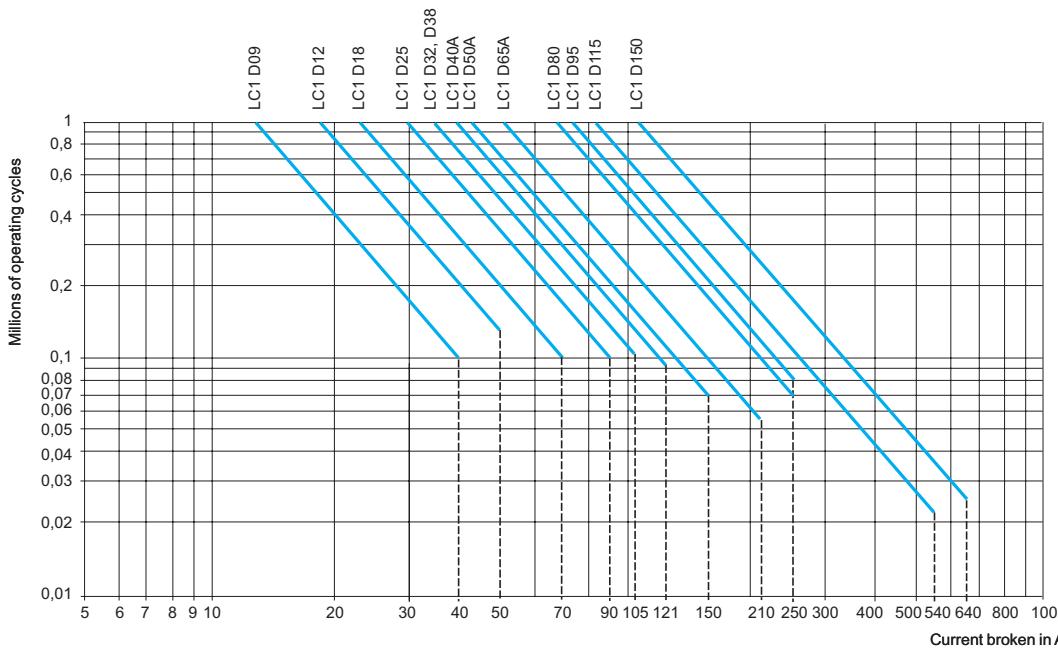


Selection (continued)

TeSys contactors

For utilisation categories AC-2 or AC-4

Selection according to required electrical durability, in categories AC-2 or AC-4 ($U_e \leq 440$ V)

Control of 3-phase asynchronous squirrel cage motors (AC-4) or slip ring motors (AC-2) with breaking whilst motor stalled.
 The current broken (I_c) in AC-4 is equal to $6 \times I_e$.
 (I_e = rated operational current of the motor).

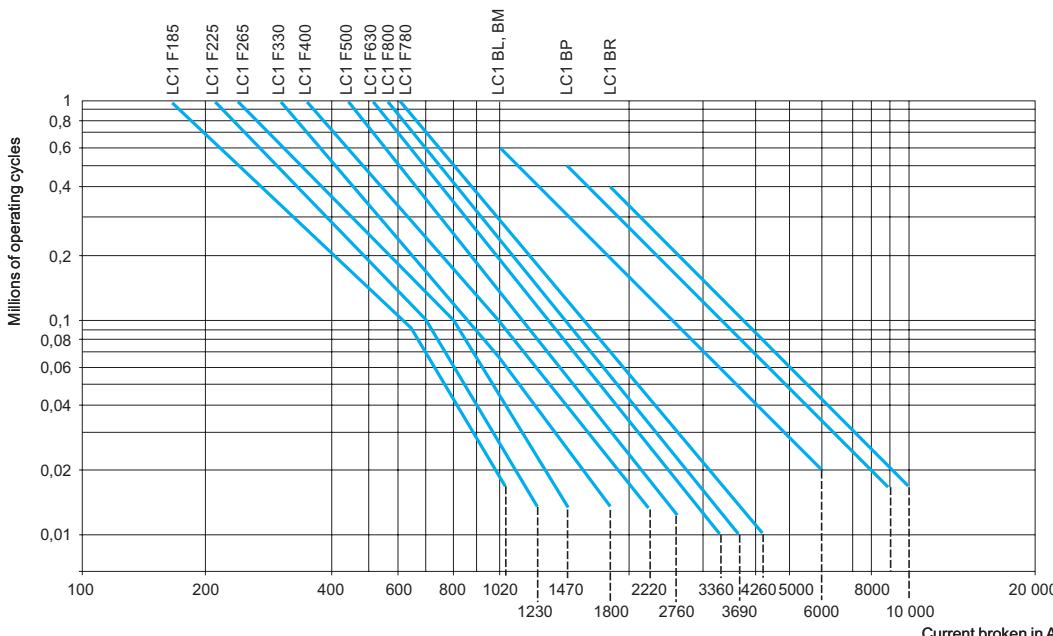


Example:

- Asynchronous motor with $P = 90$ kW - $U_e = 380$ V - $I_e = 170$ A. $I_c = 6 \times I_e = 1020$ A
 or asynchronous motor with $P = 90$ kW - $U_e = 415$ V - $I_e = 165$ A. $I_c = 6 \times I_e = 990$ A.
- 60 000 operating cycles required.
- The above selection curves show the contactor rating needed: LC1 F265.

5

Selection according to required electrical durability, use in category AC-4 ($440 \text{ V} < U_e \leq 690 \text{ V}$)



Control of 3-phase asynchronous squirrel cage motors with breaking whilst motor stalled.
 The current broken (I_c) in AC-4 is equal to $6 \times I_e$.
 (I_e = rated operational current of the motor).

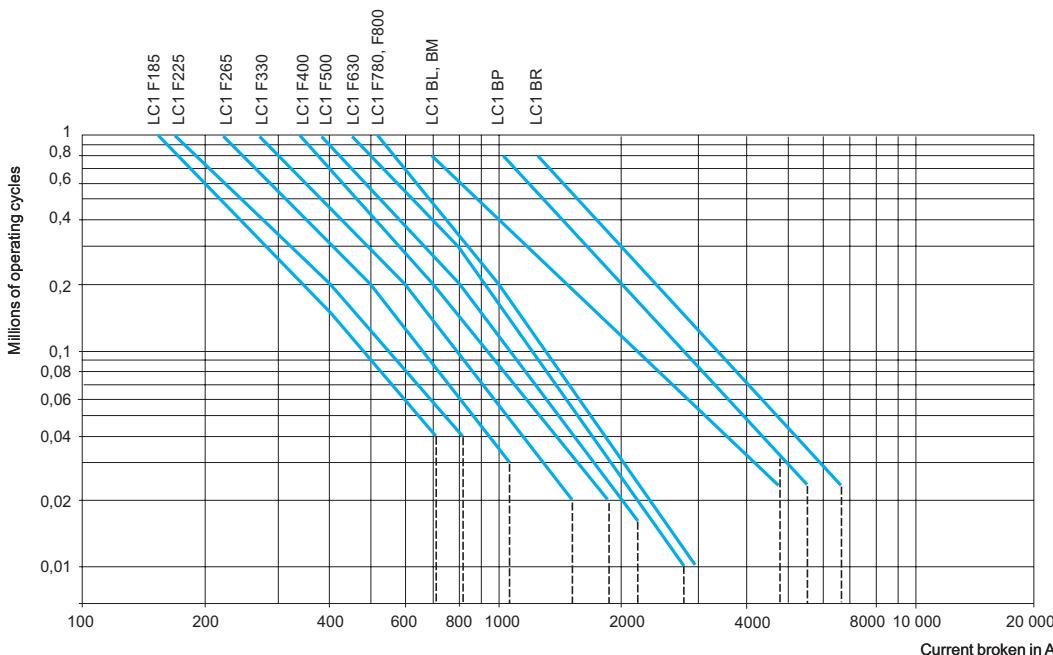



Selection

TeSys contactors

For utilisation categories DC-1 to DC-5



5



Rated operational current (Ie) in Amperes, in utilisation category DC-1, resistive loads: time constant $\frac{L}{R} \leq 1$ ms, ambient temperature $\leq 60^\circ\text{C}$

Rated operational voltage Ue	No. of poles connected in series	Contactor rating (1)									
	D09	LC1 DT20	LC1 D12	LC1 D18	LC1 DT25	LC1 DT32	LC1 D32	LC1 D38	LC1 D40A	LC1 DT60A	
V											
24	1	20	20	20	25	32	40	40	50	50	
	2	20	20	20	25	32	40	40	50	50	
	3	20	20	20	25	32	40	40	50	50	
	4	—	20	20	25	32	—	—	—	50	
48/75	1	20	20	20	25	32	40	40	50	50	
	2	20	20	20	25	32	40	40	50	50	
	3	20	20	20	25	32	40	40	50	50	
	4	—	20	20	25	32	—	—	—	50	
125	1	4	4	4	4	7	7	7	7	7	
	2	20	20	20	25	32	40	40	50	50	
	3	20	20	20	25	32	40	40	50	50	
	4	—	20	20	25	32	—	—	—	50	
250	1	1	1	1	1	1	1	1	1	1	
	2	4	4	4	4	7	7	7	7	7	
	3	20	20	20	25	32	40	40	50	50	
	4	—	20	20	25	32	—	—	—	50	
300	3	4	4	4	4	7	7	7	7	—	
	4	—	20	20	25	32	—	—	—	50	
460	1	—	—	—	—	—	—	—	—	—	
	4	—	—	—	—	—	—	—	—	—	
900	2	—	—	—	—	—	—	—	—	—	
1200	3	—	—	—	—	—	—	—	—	—	
1500	4	—	—	—	—	—	—	—	—	—	

Rated operational current (Ie) in Amperes, in utilisation category DC-2 to DC-5, inductive loads: time constant $\frac{L}{R} \leq 15$ ms, ambient temperature $\leq 60^\circ\text{C}$

Rated operational voltage Ue	No. of poles connected in series	Contactor rating (1)									
	D09	LC1 DT20	LC1 D12	LC1 D18	LC1 DT25	LC1 DT32	LC1 D32	LC1 D38	LC1 D40A	LC1 DT60A	
V											
24	1	20	20	20	25	32	40	40	50	50	
	2	20	20	20	25	32	40	40	50	50	
	3	20	20	20	25	32	40	40	50	50	
	4	—	20	20	25	32	—	—	—	50	
48/75	1	20	20	20	25	32	40	40	50	50	
	2	20	20	20	25	32	40	40	50	50	
	3	20	20	20	25	32	40	40	50	50	
	4	—	20	20	25	32	—	—	—	50	
125	1	2	2	2	2	3	3	3	4	4	
	2	20	20	20	25	32	40	40	50	50	
	3	20	20	20	25	32	40	40	50	50	
	4	—	20	20	25	32	—	—	—	50	
250	1	0,5	0,5	0,5	0,5	0,5	0,5	0,5	1	1	
	2	2	2	2	2	3	3	3	4	4	
	3	8	8	8	8	32	40	40	50	50	
	4	—	20	20	25	32	—	—	—	50	
300	3	2	2	2	2	3	3	3	3	3	
	4	—	8	8	8	32	—	—	—	50	
460	1	—	—	—	—	—	—	—	—	—	
	4	—	—	—	—	—	—	—	—	—	
900	2	—	—	—	—	—	—	—	—	—	
1200	3	—	—	—	—	—	—	—	—	—	
1500	4	—	—	—	—	—	—	—	—	—	

(1) For rated operational currents of contactors LC1 and LP1 K: please consult your Regional Sales Office.

LC1 D50A	LC1 D65A	LC1 DT80A	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
-	-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
-	-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
7	7	7	12	12	12	210	230	270	320	380	520	760	1180	760	700	1100	1750	2400		
65	65	65	100	100	200	200	210	230	270	320	380	520	760	1180	760	700	1100	1750	2400	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
-	-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
1	1,5	1,5	2	2	10	10	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400
7	7	7	12	12	200	200	190	200	250	280	350	450	700	1000	700	700	1100	1750	2400	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
-	-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
7	7	7	12	12	200	200	190	200	250	280	350	450	700	1000	700	700	1100	1750	2400	
-	-	65	100	-	200	-	240	260	300	360	430	580	850	1000	850	700	1100	1750	2400	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400	
-	-	-	-	-	200	-	190	200	250	280	350	450	700	1000	700	700	1100	1750	2400	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400	

5

LC1 D50A	LC1 D65A	LC1 DT80A	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
-	-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
-	-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
4	4	4	5	5	10	10	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400
65	65	65	100	100	200	200	160	180	250	300	350	500	700	1000	700	700	1100	1750	2400	
65	65	65	100	100	200	200	240	240	280	310	350	550	850	1000	850	700	1100	1750	2400	
-	-	65	100	-	200	-	240	240	280	310	350	550	850	1000	850	700	1100	1750	2400	
1	1.5	1.5	1	1	3	3	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400
4	4	4	5	5	200	200	140	160	220	280	310	480	680	900	680	700	1100	1750	2400	
65	65	65	100	100	200	200	160	180	250	300	350	500	700	1000	700	700	1100	1750	2400	
-	-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
3	3	3	5	5	200	200	140	160	220	280	310	480	680	900	680	700	1100	1750	2400	
-	-	65	100	-	200	-	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400	
-	-	-	-	-	200	-	140	160	220	280	310	480	680	800	680	700	1100	1750	2400	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	700	1100	1750	2400	

Selection

TeSys contactors

For utilisation categories DC-1 to DC-5

Selection according to required electrical durability, use in categories DC-1 to DC-5


The criteria for contactor selection are:

- the rated operational current I_e ,
- the rated operational voltage U_e ,
- the utilisation category and the time constant L/R ,
- the required electrical durability.

Maximum operating rate (operating cycles)

The following limits must not be exceeded: 120 operating cycles/hour at rated operational current I_e .

Electrical durability

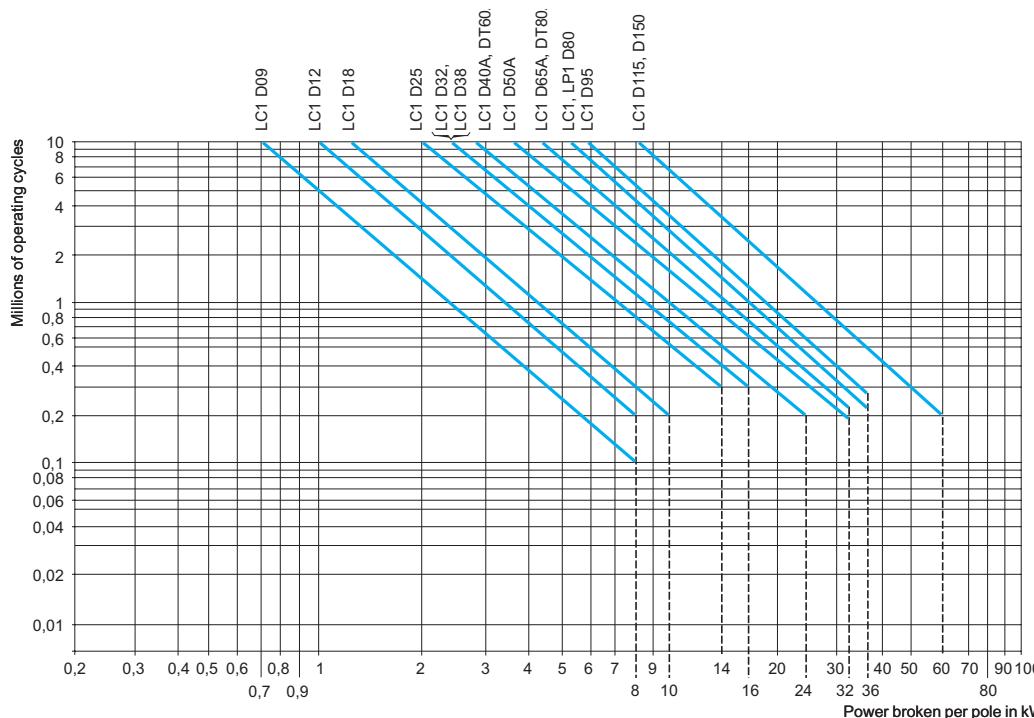

Example

Series wound motor - $P = 1.5 \text{ kW}$ - $U_e = 200 \text{ V}$ - $I_e = 7.5 \text{ A}$. Utilisation: reversing, inching.

- Utilisation category = DC-5.
- Select contactor LC1 D09 with 3 poles in series.
- The power broken is: $P_c = 2.5 \times 200 \times 7.5 = 3.75 \text{ kW}$.
- The power broken per pole is: 1.25 kW .
- The electrical durability read from the curve is ≥ 3 millions of operating cycles.

Use of poles in parallel



Electrical durability can be increased by using poles connected in parallel.

With N poles connected in parallel, the electrical durability becomes: electrical durability read from the curves $\times N \times 0.7$.

Note: 1

When the poles are connected in parallel, the maximum operational currents indicated on pages 5/204 and 5/205 must not be exceeded.

Note: 2

Ensure that the connections are made in such a way as to equalise the currents in each pole.

Selection (continued)

TeSys contactors

For utilisation categories DC-1 to DC-5


Selection according to required electrical durability, use in categories DC-1 to DC-5

Determining the electrical durability

The electrical durability can be read directly from the curves below, having previously calculated the power broken as follows:
 $P_{broken} = U_{broken} \times I_{broken}$.

The tables below give the values of U_{broken} and I_{broken} for the various utilisation categories.

Power broken	Utilisation categories	U_{broken}	I_{broken}	P_{broken}
DC-1 Non inductive or slightly inductive loads		U_e	I_e	$U_e \times I_e$
DC-2 Shunt wound motors, breaking whilst motor running		0.1 U_e	I_e	0.1 $U_e \times I_e$
DC-3 Shunt wound motors, reversing, inching		U_e	2.5 I_e	$U_e \times 2.5 I_e$
DC-4 Series wound motors, breaking whilst motor running		0.3 U_e	I_e	0.3 $U_e \times I_e$
DC-5 Series wound motors, reversing, inching		U_e	2.5 I_e	$U_e \times 2.5 I_e$

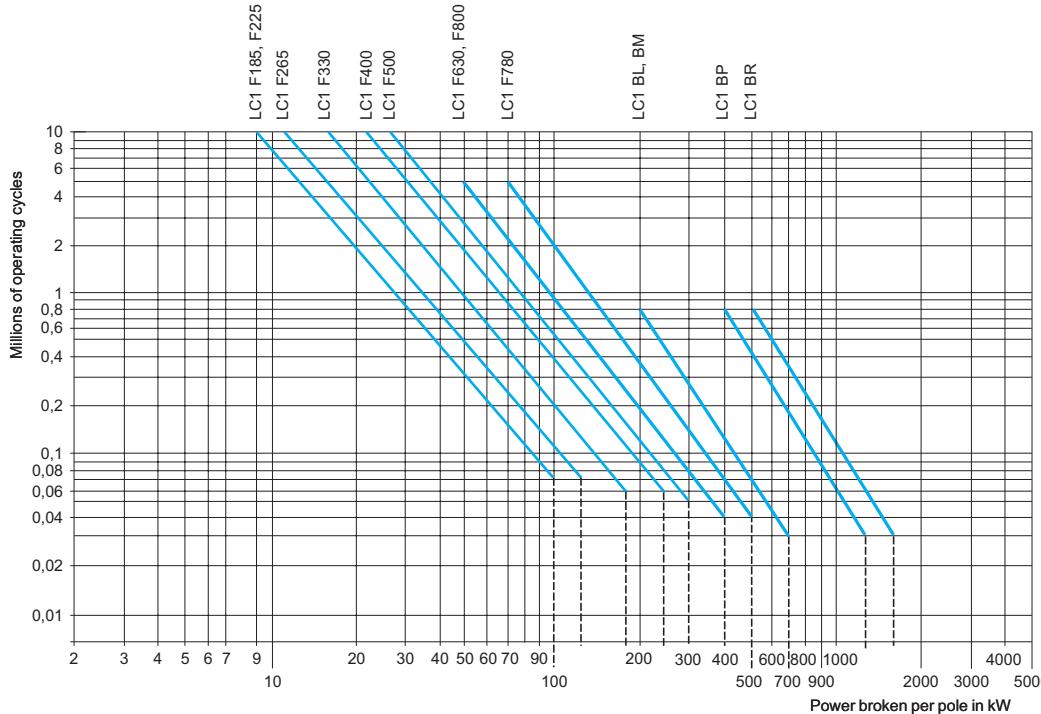

5

Example

Series wound motor: $P = 40 \text{ kW}$ - $U_e = 200 \text{ V}$ - $I_e = 200 \text{ A}$. Utilisation: reversing, inching.


Utilisation category = DC-5.

- Select contactor LC1 F265 with 2 poles in series.
- The power broken is: $P_c = 2.5 \times 200 \times 200 = 100 \text{ kW}$.
- The power broken per pole is 50 kW.
- The electrical durability read from the curve is 500 000 operating cycles.

Selection

TeSys contactors

For lighting circuits



General

The operating conditions of lighting circuits have the following characteristics:

- continuous duty: the switching device can remain closed for several days or even months,
- a dispersion factor of 1: all luminaires in the same group are switched on or off simultaneously,
- a relatively high temperature around the device due to the enclosure, the presence of fuses, or an unventilated control panel location.

This is why the operational current for lighting is lower than the value given for AC-1 duty.

Protection

The continuous duty current drawn by a lighting circuit is constant.

In fact:

- it is unlikely that the number of luminaires of an existing circuit will be modified,
- this type of circuit cannot create an overload of long duration.

It is therefore only necessary to provide short-circuit protection.

This can be provided by:

- gG type fuses, or
- modular circuit-breakers.

Nevertheless, it is always possible and sometimes more economical (smaller cable size) to protect the circuit by a thermal overload relay and associated aM type fuses.

Distribution system

Single-phase circuit, 220/240 V

The tables on pages 5/209 to 5/213 are based on a single-phase 220/240 V circuit and can therefore be applied directly in this case.

3-phase circuit, 380/415 V (with neutral)

The total number of lamps (N) to be switched simultaneously is divided into three equal groups, each connected between one phase and neutral. The contactor can then be selected from the 220/240 V single-phase tables for a number of lamps equal to $\frac{N}{3}$ lamps.

3-phase circuit, 220/240 V

The total number of lamps (N) to be switched simultaneously is divided into three equal groups, each connected between 2 phases (L1-L2), (L2-L3), (L3-L1). The contactor can then be selected from the 220/240 V single-phase table for a number of lamps equal to $\frac{N}{\sqrt{3}}$ lamps.

Contactor selection tables

For the different types of lamps, the tables on pages 5/209 to 5/213 give the maximum number of lamps of unit power P (in Watts), which can be switched simultaneously for each size of contactor.

They are based on:

- a 220/240 V single-phase circuit,
- an ambient temperature of 55 °C (1), taking into account the operating conditions (see General paragraph).
- an electrical life of more than 10 years (200 days' operation per year).

They take into account:

- the total current drawn (including ballast),
- transient phenomena which occur at switch-on,
- the starting currents and their duration,
- the circulation of any harmonics which may be present.

Lamps with compensating capacitor C (μF) connected in parallel

Parallel connected compensating capacitors C cause a current peak at the moment of switch-on. To ensure that the value of this current peak remains compatible with the making characteristics of the contactors, the unit value of the capacitance must not exceed the following:

Switching contactor rating	LC1	LP1	LC1	LC1	LC1	LC1						
	K09	K09	D09	D12	D18	D25	D32	D38	D40A	D50A	D65A	D80

Maximum unit value C (μF) of parallel connected compensating capacitor

Switching contactor rating	LC1	LC1	LC1	LC1	LC1	LC1	LC1	LC1	LC1	LC1	LC1	LC1
	D95	D115	D150	F185	F225	F265	F330	F400	F500	F630	F800	

Maximum unit value C (μF) of parallel connected compensating capacitor

This value is independent of the number of lamps switched by the contactor.

(1) For an ambient temperature of 40 °C, multiply the number by 1.2.

Selection (continued)

TeSys contactors
For lighting circuits



Usual values

The tables show the following values:

- IB: value of current drawn by each lamp at its rated voltage,
 - C: unit capacitance for each lamp,
- corresponding to the values normally quoted by lamp manufacturers.

These values are given for an ambient temperature of 55 °C (for 40 °C, multiply the number by 1.2).

Incandescent and halogen lamps

P (W)	60	75	100	150	200	300	500	750	1000	LC1
IB (A)	0.27	0.34	0.45	0.68	0.91	1.40	2.30	3.40	4.60	
Max. no. of lamps according to P (W)	35 59 77 92 129 163 207 296 430 466 710 770 888 1006 1274 1718 2328 2776	28 47 61 73 103 129 164 177 256 280 564 610 704 604 764 1030 1396 2204	21 35 46 55 77 97 124 117 170 184 426 462 532 304 504 682 924	14 23 30 36 51 64 82 117 126 138 282 210 352 262 400 378 508 690	10 17 23 27 38 48 62 88 126 138 210 136 262 170 298 378 508 448	6 11 31 15 25 48 40 57 82 90 136 82 170 104 194 244 330 448	4 7 9 9 11 19 24 34 50 54 82 60 70 118 148 200 272	2 4 4 6 7 13 16 23 34 36 56 60 52 70 80 100 136 184	2 3 4 4 5 7 12 17 26 28 42 46 52 60 76 102 140 136	K09 D09, D12 D18 D25 D32, D38 D40A D50A, D65A D80, D95 D115 D150 F185 F225 F265 F330 F400 F500 F630 F800


Mixed lighting lamps

P (W)	100	160	250	500	1000	LC1
IB (A)	0.45	0.72	1.10	2.30	4.50	
Max. no. of lamps according to P (W)	21 35 46 55 77 97 124 177 256 280 426 462 532 604 764 1030 1398 1666	13 22 29 36 48 61 49 111 160 174 266 288 332 378 478 644 874 1040	8 14 18 23 30 38 49 70 104 114 174 188 218 246 312 422 572 680	4 7 9 11 15 19 24 34 50 54 82 90 104 118 150 202 272	2 3 4 5 7 9 12 17 26 28 42 46 52 60 76 102 140 166	K09 D09, D12 D18 D25 D32, D38 D40A D50A, D65A D80, D95 D115 D150 F185 F225 F265 F330 F400 F500 F630 F800

Selection (continued)

TeSys contactors

For lighting circuits



Usual values

The tables show the following values:

- IB: value of current drawn by each lamp at its rated voltage,
- C: unit capacitance for each lamp,
corresponding to the values normally quoted by lamp manufacturers.

These values are given for an ambient temperature of 55 °C (for 40 °C, multiply the number by 1.2).

Fluorescent lamps with starter. Single fitting

P (W)	Non corrected				With parallel correction					
	20	40	65	80	110	20	40	65	80	110
	IB (A)	0.39	0.45	0.70	0.80	1.2	0.17	0.26	0.42	0.52
C (μ F)	-	-	-	-	-	5	5	7	7	16
Max. no. of lamps according to P (W)	24	21	13	12	8	56	36	22	18	-
	41	35	22	20	13	94	61	38	30	22
	53	46	30	26	17	123	80	50	40	29
	66	57	37	32	21	152	100	61	50	36
	89	77	50	43	29	205	134	83	67	48
	112	97	62	55	36	258	169	104	84	61
	143	124	80	70	46	329	215	133	107	77
	205	177	114	100	66	470	367	190	153	111
	410	354	228	200	132	940	614	380	306	222
	492	426	274	240	160	1128	738	456	368	266
	532	462	296	260	172	1224	800	490	400	288
	614	532	342	300	200	1412	922	570	462	332
	696	604	388	340	226	1600	1046	648	522	378
	882	764	490	430	286	2024	1322	818	662	478
	1190	1030	662	580	386	2728	1724	1104	892	644
	1612	1398	698	786	524	3700	2418	1498	1210	874

Fluorescent lamps with starter. Twin fitting

Max. no. of lamps according to P (W)	Non corrected					With series correction					
	P (W)	2x20	2x40	2x65	2x80	2x110	2x20	2x40	2x65	2x80	2x110
	IB (A)	2x0.22	2x0.41	2x0.67	2x0.82	2x1.1	2x0.13	2x0.24	2x0.39	2x0.48	2x0.65
2x21	2x11	2x7	2x5	2x4			2x36	2x20	2x12	2x10	2x7
2x36	2x18	2x10	2x8	2x6			2x60	2x32	2x20	2x16	2x12
2x46	2x24	2x14	2x12	2x8			2x80	2x42	2x26	2x20	2x16
2x58	2x30	2x18	2x14	2x10			2x100	2x54	2x32	2x26	2x20
2x78	2x42	2x26	2x20	2x14			2x134	2x72	2x44	2x36	2x26
2x100	2x52	2x32	2x26	2x18			2x168	2x90	2x56	2x44	2x32
2x126	2x68	2x40	2x34	2x24			2x214	2x116	2x70	2x58	2x42
2x180	2x96	2x58	2x48	2x36			2x306	2x166	2x102	2x82	2x60
2x360	2x194	2x118	2x96	2x72			2x614	2x332	2x204	2x166	2x122
2x436	2x234	2x142	2x116	2x86			2x738	2x400	2x246	2x200	2x148
2x472	2x254	2x154	2x126	2x94			2x800	2x432	2x266	2x216	2x160
2x544	2x292	2x178	2x146	2x108			2x922	2x500	2x308	2x250	2x184
2x618	2x332	2x202	2x166	2x124			2x1046	2x566	2x348	2x282	2x208
2x782	2x420	2x256	2x210	2x156			2x1322	2x716	2x440	2x358	2x264
2x1054	2x566	2x346	2x282	2x210			2x1784	2x966	2x594	2x482	2x356
2x1430	2x766	2x468	2x384	2x286			2x2418	2x1310	2x806	2x654	2x484

Selection (continued)

TeSys contactors

For lighting circuits



Usual values

The tables show the following values:

- IB: value of current drawn by each lamp at its rated voltage,
- C: unit capacitance for each lamp,
corresponding to the values normally quoted by lamp manufacturers.

These values are given for an ambient temperature of 55 °C (for 40 °C, multiply the number by 1.2).

Fluorescent lamps without starter. Single fitting

Max. no. of lamps according to P (W)	Non corrected					With parallel correction					LC1 K09 D09, D12 D18 D25 D32, D38 D40A D50A, D65A D80, D95 D115, D150 F185 F225 F265 F330 F400 F500 F630, F800
	P (W)	20	40	65	80	110	20	40	65	80	
	IB (A)	0.43	0.55	0.80	0.95	1.4	0.19	0.29	0.46	0.57	0.79
	C (μF)	—	—	—	—	—	5	5	7	7	16
22	22	17	12	10	6		50	33	20	16	—
37	37	29	20	16	11		84	55	34	28	20
48	48	38	26	22	15		110	72	45	36	26
60	60	47	32	27	18		136	89	56	45	32
97	97	63	43	36	25		184	101	76	61	44
102	102	80	55	46	31		231	151	95	77	55
130	130	101	70	58	40		294	193	121	98	70
186	186	145	100	84	57		421	275	173	140	101
372	372	290	200	168	114		842	550	346	280	202
446	446	348	240	202	136		1010	662	416	336	242
484	484	378	260	218	148		1094	716	452	364	262
558	558	436	300	252	170		1262	828	522	420	304
632	632	494	340	286	194		1432	938	590	476	344
800	800	624	430	362	246		1810	1186	748	604	434
1078	1078	844	580	488	330		2442	1600	1008	814	586
1462	1462	1144	786	662	448		3310	2168	1366	1104	796


Fluorescent lamps without starter. Twin fitting

Max. no. of lamps according to P (W)	Non corrected					With series correction					LC1 K09 D09, D12 D18 D25 D32, D38 D40A D50A, D65A D80, D95 D115, D150 F185 F225 F265 F330 F400 F500 F630, F800
	P (W)	2x20	2x40	2x65	2x80	2x110	2x20	2x40	2x65	2x80	
	IB (A)	2x0.25	2x0.47	2x0.76	2x0.93	2x1.3	2x0.14	2x0.26	2x0.43	2x0.53	2x0.72
2x19	2x19	2x10	2x6	2x5	2x3		2x34	2x18	2x11	2x9	2x6
2x32	2x32	2x16	2x10	2x8	2x6		2x56	2x30	2x18	2x14	2x10
2x42	2x42	2x22	2x12	2x10	2x8		2x74	2x40	2x24	2x18	2x14
2x52	2x52	2x26	2x16	2x12	2x10		2x92	2x50	2x30	2x24	2x18
2x70	2x70	2x36	2x22	2x18	2x12		2x124	2x66	2x40	2x32	2x24
2x88	2x88	2x46	2x28	2x22	2x16		2x156	2x84	2x50	2x40	2x30
2x112	2x112	2x58	2x36	2x30	2x20		2x200	2x106	2x64	2x52	2x38
2x160	2x160	2x84	2x52	2x42	2x30		2x234	2x152	2x92	2x74	2x54
2x320	2x320	2x170	2x104	2x86	2x60		2x570	2x306	2x186	2x150	2x110
2x384	2x384	2x204	2x126	2x102	2x74		2x686	2x368	2x222	2x180	2x132
2x416	2x416	2x220	2x136	2x112	2x80		2x742	2x400	2x242	2x196	2x144
2x480	2x480	2x254	2x158	2x128	2x92		2x856	2x462	2x278	2x226	2x166
2x544	2x544	2x288	2x178	2x146	2x104		2x970	2x522	2x316	2x256	2x188
2x688	2x688	2x366	2x226	2x184	2x132		2x1228	2x662	2x400	2x324	2x238
2x928	2x928	2x494	2x304	2x248	2x178		2x1656	2x892	2x540	2x438	2x322
2x1258	2x1258	2x668	2x414	2x338	2x242		2x2246	2x1210	2x730	2x592	2x436

Selection (continued)

TeSys contactors

For lighting circuits



Usual values

The tables show the following values:

- IB: value of current drawn by each lamp at its rated voltage,
 - C: unit capacitance for each lamp,
- corresponding to the values normally quoted by lamp manufacturers.

These values are given for an ambient temperature of 55 °C (for 40 °C, multiply the number by 1.2).

Low pressure sodium vapour lamps								
Non corrected								With parallel correction
P (W)	35	55	90	135	150	180	200	
IB (A)	1.2	1.6	2.4	3.1	3.2	3.3	3.4	0.3 0.4 0.6 0.9 1 1.2 1.3
C (μF)	-	-	-	-	-	-	-	17 17 25 36 36 36 36
Max. no. of lamps according to P (W)	6	5	3	2	2	2	2	LC1
10	7	5	3	3	3	3	3	K09
12	9	6	4	4	4	4	4	D09, D12
15	11	7	6	5	5	5	5	D18
21	16	10	8	8	7	7	7	D25
27	20	13	10	10	10	9	9	D32, D38
35	26	17	13	13	12	12	12	D40A
50	37	25	19	18	18	17	17	D50A, D65A
100	75	50	38	36	36	34	34	D80, D95
140	104	70	54	52	50	48	48	D115, D150
152	114	76	58	56	54	54	54	F185
174	130	88	68	66	64	62	62	F225
198	148	98	76	74	72	70	70	F265
250	188	124	96	94	90	88	88	F330
338	254	168	130	126	122	118	118	F400
496	372	248	192	186	180	174	174	F500
								F630, F800

High pressure sodium vapour lamps						
Non corrected					With parallel correction	
P (W)	150	250	400	700	1000	
IB (A)	1.9	3.2	5	8.8	12.4	0.84 1.4 2.2 3.9 5.5
C (μF)	-	-	-	-	-	20 32 48 96 120
Max. no. of lamps according to P (W)	4	2	1	-	-	LC1
6	3	2	1	-	-	K09
7	4	3	1	1	-	D09, D12
10	5	3	2	1	-	D18
13	8	5	2	2	-	D25
17	10	6	3	2	-	D32, D38
22	13	8	4	3	-	D40A
31	18	12	6	4	-	D50A, D65A
62	36	24	12	8	-	D80, D95
88	52	34	18	14	-	D115, D150
96	56	36	20	16	-	F185
110	66	42	24	18	-	F225
124	74	48	26	20	-	F265
158	94	60	34	24	-	F330
214	126	80	46	32	-	F400
312	186	118	68	48	-	F500
						F630, F800

Selection (continued)

TeSys contactors

For lighting circuits



Usual values

The tables show the following values:

- IB: value of current drawn by each lamp at its rated voltage,
- C: unit capacitance for each lamp,
corresponding to the values normally quoted by lamp manufacturers.

These values are given for an ambient temperature of 55 °C (for 40 °C, multiply the number by 1.2).

High pressure mercury vapour lamps

P (W)	Non corrected							With parallel correction						
	50	80	125	250	400	700	1000	50	80	125	250	400	700	1000
	IB (A)	0.54	0.81	1.20	2.30	4.10	6.80	9.90	10	10	10	18	25	40
C (μF)	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Max. no. of lamps according to P (W)	14	9	6	3	1	-	-	-	-	-	-	-	-	-
22	14	9	5	2	1	1	-	40	26	17	9	-	-	-
27	18	12	6	3	2	1	-	50	33	22	11	6	-	-
35	23	15	8	4	2	1	-	63	42	28	14	8	5	3
48	32	21	11	6	3	2	-	86	57	38	20	11	6	4
61	40	27	14	8	4	3	-	110	73	49	25	14	8	6
77	51	34	17	10	6	4	-	140	93	62	32	18	11	7
111	74	49	26	14	8	6	-	200	133	89	46	26	15	10
222	148	100	52	28	16	12	-	400	266	178	92	52	30	20
310	206	140	72	40	24	17	-	560	372	250	128	72	44	30
336	224	152	78	44	26	18	-	606	404	272	140	78	48	32
388	258	174	90	50	30	20	-	700	466	312	162	90	54	38
440	294	198	102	58	34	24	-	792	528	354	182	102	62	42
556	372	250	130	72	44	30	-	1002	668	448	232	130	78	54
752	500	338	176	98	60	40	-	1352	902	606	312	176	106	74
1102	734	496	258	144	88	60	-	1982	1322	888	458	258	156	108

LC1
K09
D09, D12
D18
D25
D32, D38
D40A
D50A, D65A
D80, D95
D115, D150
F185
F225
F265
F330
F400
F500
F630, F800

Metal iodine vapour lamps

P (W)	Non corrected				With parallel correction			
	250	400	1000	2000	250	400	1000	2000
	IB (A)	2.5	3.6	9.5	20	1.4	2	5.3
C (μF)	-	-	-	-	32	32	64	140
Max. no. of lamps according to P (W)	3	2	-	-	-	-	-	-
4	3	1	-	-	-	-	-	-
6	4	1	-	-	-	-	-	-
7	5	2	-	-	13	9	-	-
10	7	2	1	-	18	13	4	-
13	9	3	1	-	23	16	6	-
16	11	4	2	-	30	21	7	-
24	16	6	3	-	42	30	11	5
48	32	12	6	-	84	60	22	10
66	46	18	8	-	120	84	32	14
72	50	20	10	-	130	90	34	16
84	58	22	12	-	150	104	40	18
94	66	24	14	-	170	118	44	20
120	84	32	16	-	214	150	56	26
162	112	42	20	-	290	202	76	36
238	164	62	30	-	424	298	112	52


LC1
K09
D09, D12
D18
D25
D32, D38
D40A
D50A, D65A
D80, D95
D115, D150
F185
F225
F265
F330
F400
F500
F630, F800

5

Selection

TeSys contactors

For heating circuits



Selection

General

A heating circuit is a power switching circuit supplying one or more resistive heating elements switched by a contactor.

The same general rules apply as for motor circuits, except that heating circuits are not normally subjected to overload currents. It is therefore only necessary to provide short-circuit protection.

Characteristics of heating elements

The examples below are based on resistive heating elements used for industrial furnaces or for the heating of buildings (infra-red or resistive radiant type, convector heaters, closed loop heating circuits, etc.).

The variation in resistance values between hot and cold states causes a current peak at switch-on which never exceeds 2 to 3 times the rated operational current (I_n). This initial peak does not recur during normal operation where subsequent switching is thermostatically controlled.

The rated power and current of a heater are given for the normal operating temperature.

Protection

The steady state current drawn by a heating circuit is constant when the voltage is stable.

In fact:

- It is unlikely that the number of loads in an existing circuit will be modified;
- This type of circuit cannot create overloads. It is therefore only necessary to provide short-circuit protection.

This can be provided by:

- gG type fuses, or
- modular circuit-breakers.

Nevertheless, it is always possible and sometimes more economical (smaller cable size) to protect the circuit by a thermal overload relay and associated aM type fuses.

Switching, control, protection

A heating element or group of heating elements of a given power may be either single-phase or 3-phase and may be supplied from a 220/127 V or a 400/230 V distribution system.

Excluding a single-phase 127 V system (which is no longer commonly used), the following 3 types of circuit arrangement are possible:


- Single-phase, 2-pole switching
- Single-phase, 4-pole switching
- 3-phase switching

Component selection according to the power switched

The combinations suggested below are based on an ambient temperature of 55 °C and for powers at the nominal voltage, but they also ensure switching in the event of prolonged overloads up to 1.05 Ue.

Single-phase, 2-pole switching



Maximum power (kW)	220/240 V	380/415 V	660/690 V	1000 V	Contactor rating
3.5	6.5	11	—	—	LC1, LP1 K09
4.5	8	14	—	—	LC1 D12
6	10.5	18.5	—	—	LC1 D18
7	13	22.5	—	—	LC1 D25
10	18	30.5	—	—	LC1 D32, LC1 D38
13	22.5	39.5	48	—	LC1 D40A
16.5	28.5	43.5	68	—	LC1 D65A
24	42	73	82.5	—	LC1, LP1 D80
44	76	118	157	—	LC1 D115, LC1 D150
48	83	130	170	—	LC1 F185
52	90	145	185	—	LC1 F225
60	104	160	210	—	LC1 F265
75	130	200	250	—	LC1 F330
86	145	230	300	—	LC1 F4002
116	200	310	400	—	LC1 F5002
170	290	450	695	—	LC1 F6302, LC1 F800
270	460	715	945	—	LC1 F780
140	242	370	490	—	LC1 BL32
220	380	580	770	—	LC1 BM32
350	605	925	1225	—	LC1 BP32
480	830	1270	1680	—	LC1 BR32




Circuit controlled by 2 poles of the contactor.

Selection (continued)

TeSys contactors
For heating circuits



Circuit controlled by a 4-pole contactor with the poles parallel connected in pairs using appropriate connecting links. This solution enables the control of power values approximately equivalent to those controlled by the same contactor on 3-phase.



Circuit controlled by 3 poles of the contactor.

**Component selection according to the power switched
(continued)**

Single-phase, 4-pole switching

Maximum power (kW)				Contactor rating
220/240 V	380/415 V	660/690 V	1000 V	
4.5	8	13.5	—	LC1, LP1 K09004
7	13	22.5	—	LC1 DT25
12	21	36.5	—	LC1 DT40
26	45.5	79.5	109	LC1 DT80A
38	66	117.5	132	LC1, LP1 D80004
70	121	190	251	LC1 D115004
76	132	202	270	LC1 F1854
80	142	230	295	LC1 F2254
96	166	253	335	LC1 F2654
120	205	320	400	LC1 F3304
137	236	363	480	LC1 F4004
185	320	490	650	LC1 F5004
272	470	718	950	LC1 F6304
425	735	1140	1520	LC1 F7804
224	387	590	785	LC1 BL34
352	608	930	1230	LC1 BM34
560	968	1478	1960	LC1 BP34
768	1328	2025	2685	LC1 BR34

3-phase switching

Maximum power (kW)				Contactor rating
220/240 V	380/415 V	660/690 V	1000 V	
4.5	8	13.5	—	LC1, LP1 K09
7	13	22.5	—	LC1 D12
10	18	30.5	—	LC1 D18
13	22.5	39.5	—	LC1 D25
18	31	52.5	—	LC1 D32, LC1 D38
22.5	38	68	78	LC1 D40A
28.5	49	86	112.5	LC1 D65A
40.5	70.5	126	135.5	LC1, LP1 D80
76	131	206	275	LC1 D115, LC1 D150
82	143	220	295	LC1 F185
90	155	250	320	LC1 F225
103	179	275	370	LC1 F265
130	225	345	432	LC1 F330
149	256	395	525	LC1 F400
200	346	530	710	LC1 F500
294	509	780	1030	LC1 F630, LC1 F800
463	800	1235	1650	LC1 F780
242	419	640	850	LC1 BL33
380	658	1005	1350	LC1 BM33
606	1047	1600	2150	LC1 BP33
830	1437	2200	2950	LC1 BR33


Application example

For a 220 V, 50 Hz, single-phase circuit supplying a total heating load of 12.5 kW.
Select a 3-pole contactor **LC1 D65A**.

Selection

TeSys contactors

For switching the primaries
of 3-phase LV/LV transformers



Operating conditions

Maximum ambient temperature: 55 °C.

When a transformer is switched on, there is generally an initial current surge which reaches its peak value almost instantaneously and then decreases in a largely exponential manner to quickly reach its steady state value.

The value of this current depends on:

- the characteristics of the magnetic circuit and of the windings (cross sectional area of the core, rated inductance, number of turns, layout and size of the windings, ...)
- the performance of the magnetic laminations used,
- the magnetic state of the circuit and the instantaneous value of the a.c. mains voltage at the moment of switch-on.

The inrush current at the moment of switch-on can reach 20 to 40 times the rated current for the various kVA power ratings in the tables below. This value is independent of the "no-load" or "on-load" state of the transformer.

Contactor selection

The peak magnetising current of the transformer must be lower than the values given in the tables below.

Maximum operating rate: 120 operating cycles/hour.

Contactor rating		LC1/ LP1	LC1/ LP1	LC1/ D09	LC1/ D12	LC1/ D18	LC1/ D25	LC1/ D32	LC1/ D38	LC1/ D40A	LC1/ D50A	LC1/ D65A	LC1/ D80	LC1/ D95	LC1/ D115	LC1/ D150		
Maximum permissible current peak at switch-on	A	160	225	350	350	420	630	770	770	1100	1250	1400	1550	1650	1800	2000		
Maximum operational power (1)	220 V 240 V	kVA	2	2.5	4	4	5	7	8.5	8.5	14	16	18	19.5	19.5	25	25	
	380 V 400 V	kVA	3.5	5	7	7	8	12.5	15	15	24	27	31	34	34	50	50	
	415 V 440 V	kVA	4	5.5	8	8	9	14	17	17	28	32	36	39	39	55	55	
	500 V	kVA	5	7	9	9	11	16.5	20	20	32	36	40	45	45	65	65	
	660 V 690 V	kVA	6	8.5	12	12	14	21.5	26.5	26.5	42	48	53	59	59	80	80	
	1000 V	kVA	—	—	—	—	—	—	—	—	60	70	80	85	95	100	100	
Contactor rating		LC1/ F185	LC1/ F225	LC1/ F265	LC1/ F330	LP1/ F400	LC1/ F500	LC1/ F630	LC1/ F780	LC1/ F800	LC1/ BL	LC1/ BM	LC1/ BP	LC1/ BR	LC1/ BL	LC1/ BM	LC1/ BP	LC1/ BR
Maximum permissible current peak at switch-on	A	2900	3300	3800	5000	6300	7700	9000	12 000	11 000	18 000	18 000	18 000	24 000	30 000			
Maximum operational power (1)	220 V 240 V	kVA	40	45	50	65	75	100	120	175	145	230	230	300	380			
	380 V 400 V	kVA	75	80	90	120	130	170	200	280	245	400	400	530	660			
	415 V 440 V	kVA	80	90	100	130	140	190	220	310	270	450	450	560	700			
	500 V	kVA	95	100	110	140	170	225	260	350	315	480	480	600	750			
	660 V 690 V	kVA	120	130	140	170	200	270	350	400	425	600	600	800	950			
	1000 V	kVA	150	170	200	225	250	375	470	650	550	700	700	1000	1200			

(1) Maximum operational power corresponding to a current peak at switch-on of 30 In.

Characteristics :
pages 5/50 to 5/55

References :
pages 5/62 to 5/67

Dimensions, schemes :
pages 5/92 to 5/97

5/216

Schneider
Electric

Selection

TeSys contactors

For switching 3-phase capacitor banks used for power factor correction



Standard contactors

Capacitors, together with the circuits to which they are connected, form oscillatory circuits which can, at the moment of switch-on, give rise to high transient currents (> 180 In) at high frequencies (1 to 15 kHz).

As a general rule, the peak current on energisation is lower when:

- the mains inductances are high,
- the line transformer ratings are low,
- the transformer short-circuit voltage is high,
- the ratio between the sum of the ratings of the capacitors already switched into the circuit and that of the capacitor to be switched in is small (for multiple step capacitor banks).

In accordance with standards IEC 60070, NF C 54-100, VDE 0560, the switching contactor must be able to withstand a continuous current of 1.43 times the rated current of the capacitor bank step being switched.

The rated operational powers given in the tables below take this overload into account. Short-circuit protection is normally provided by g1 type HPC fuses rated at 1.7 to 2 In.

Contactor applications

Operating conditions

Capacitors are directly switched. **The values of peak current at switch-on must not exceed the values indicated opposite.**

An inductor may be inserted in each of the three phases supplying the capacitors to reduce the peak current, if necessary.

Inductance values are determined according to the selected operating temperature.

Power factor correction by a single-step capacitor bank

The use of a choke inductor is unnecessary: the inductance of the mains supply is adequate to limit the peak to a value compatible with the contactor characteristics.

Power factor correction by a multiple-step capacitor bank

Select a special contactor as defined on page 5/102.
If a standard contactor is used, it is essential to insert a choke inductor in each of the three phases of each step.

Maximum operational power of contactors

Standard contactors

Maximum operating rate: 120 operating cycles/hour.

Electrical durability at maximum load: 100 000 operating cycles.


With choke inductors connected, where necessary.

Operational power at 50/60 Hz						Max. peak current	Contactor rating
θ ≤ 40 °C (1)			θ ≤ 55 °C (1)				
kvAR	kvAR	kvAR	kvAR	kvAR	kvAR	A	
6	11	15	6	11	15	560	LC1 D09, D12
9	15	20	9	15	20	850	LC1 D18
11	20	25	11	20	25	1600	LC1 D25
14	25	30	14	25	30	1900	LC1 D32, D38
17	30	37	17	30	37	2160	LC1 D40
22	40	50	22	40	50	2160	LC1 D50
22	40	50	22	40	50	3040	LC1 D65
35	60	75	35	60	75	3040	LC1 D80, D95
50	90	125	38	75	80	3100	LC1 D115
60	110	135	40	85	90	3300	LC1 D150
70	125	160	50	100	100	3500	LC1 F185
80	140	190	60	110	110	4000	LC1 F225
90	160	225	75	125	125	5000	LC1 F265
100	190	275	85	140	165	6500	LC1 F330
125	220	300	100	160	200	8000	LC1 F400
180	300	400	125	220	300	10 000	LC1 F500
250	400	600	190	350	500	12 000	LC1 F630
250	400	600	190	350	500	14 200	LC1 F800
200	350	500	180	350	500	25 000	LC1 BL
300	550	650	250	500	600	25 000	LC1 BM
500	850	950	400	750	750	25 000	LC1 BP
600	1100	1300	500	1000	1000	25 000	LC1 BR

(1) Upper limit of temperature category conforming to IEC 60070.

Recommended wiring scheme, operation, curves

TeSys contactors For auto-transformer starting



Applications

Auto-transformer starting is suitable for starting all types of squirrel cage motors: with 3, 6 or even 9 terminals according to North American technology.



Starting is performed at reduced voltage and produces maximum torque at minimum line current.

It allows the starting torque ($C = f(U)^2$) to be adapted to the resistive torque of the driven machine by means of the 2 or 3 intermediate voltage take-off connections on the auto-transformer (0.65 and 0.8 Un or 0.5, 0.65 and 0.8 Un). In general, only one take-off connection is used.

This type of starting is used for high power and/or high inertia machines.

The motor is never disconnected from its power supply during starting (closed transition) and transient phenomena are eliminated.

Recommended wiring scheme

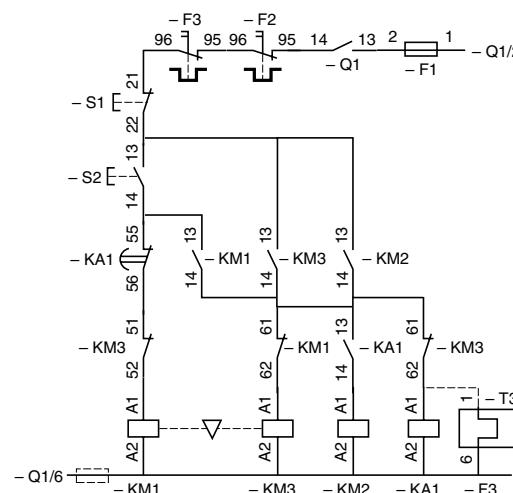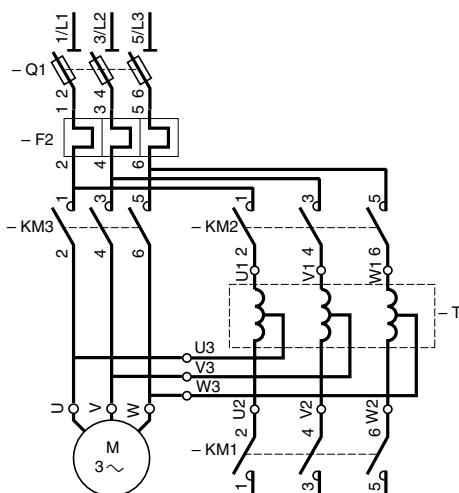

5


Operation

Starting is performed in 3 stages:


- star connection of the auto-transformer is made by KM1, then contactor KM2 closes and the motor starts under reduced voltage;
- the neutral point is opened by KM1; part of the auto-transformer winding is switched into each phase for a short moment, constituting a stator starting inductance;
- KM3 switches the motor to full mains voltage and causes the auto-transformer to be shunted out of circuit by KM2.

The auto-transformer used generally has an air gap (adjusted or not) in order to obtain, during the second phase of starting, a series inductance whose value is compatible with correct starting.

Operating curves

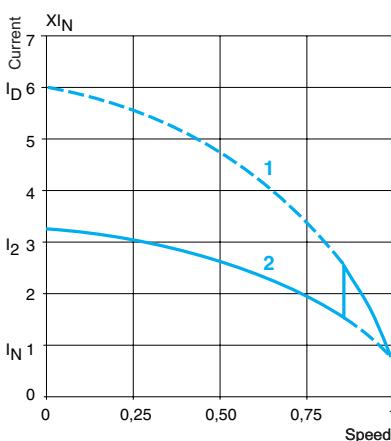

- 1 Direct switching current
- 2 Current with auto-transformer

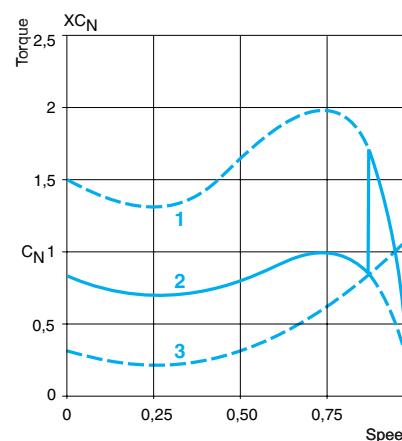

- 1 Direct motor torque
- 2 Torque with auto-transformer
- 3 Resistive torque of the machine

Combination starters for customer assembly

TeSys contactors For auto-transformer starting

Auto-transformer starters from 59 to 900 kW up to 440 V (type 1 coordination)

The components recommended in the table below have been determined according to the following characteristics:

- auto-transformer: on 0.65 Un connection with non adjusted air gap,
- 3 starts per hour, of which 2 consecutive,
- Motor starting current: $Id/In = 6$,
- $Iq = 70 \text{ kA}$,
- Transient current on closing of KM3 $\leq 7\sqrt{2}In$,
- Maximum starting time: 30 seconds,
- Ambient temperature $\theta \leq 40^\circ\text{C}$.

Switch-disconnector-fuses: operators and accessories, please consult your Regional Sales Office.
Contactors: 3-pole.

LC1 D: see pages 5/62 and 5/65,
LC1 F: please consult your Regional Sales Office,
LC1 B: please consult your Regional Sales Office.

Auxiliary contact blocks:

- for contactors LC1 D: one LAD N11 (1 N/O + 1 N/C) on KM1,
- for contactors LC1 F: one LAD N22 (2 N/O + 2 N/C) on KM1, KM2 and KM3.

Thermal overload relays:

- LRD: see pages 6/20 to 6/25,
- LR9 D: see page 6/23,
- LR9 F: please consult your Regional Sales Office.

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3		Switch- disconnector- fuse Reference		aM fuses	Contactors			Overload relays				
KW	kW	kW	kW	A		Size	Rating	KM3 LC1	KM2 LC1	KM1 LC1	Reference (1)	Setting range
220/ 380/ 415 V 440 V In 230 V 400 V max												
30	55	59	59	105	GS• K	22 x 58	125	D115	D115	D3210	LR9 D5369	90...150
											LRD 4367	95...120
40	75	80	80	138	GS• L	T0	160	D150	D115	D5011	LR9 D5369	90...150
											LRD 4369	110...140
51	90	90	100	170	GS• N	T1	200	F185	D115	D5011	LR9 F5371	132...220
63	110	110	110	205	GS• N	T1	250	F225	D150	D8011	LR9 F5371	132...220
75	132	132	150	245	GS• N	T1	250	F265	F185	D115	LR9 F5375	200...330
90	160	160	185	300	GS• QQ	T2	315	F330	F265	D115	LR9 F5375	200...330
110	200	200	220	370	GS• QQ	T2	400	F400	F330	D115	LR9 F5379	300...500
140	250	257	280	460	GS2 S	T3	500	F500	F400	D115	LR9 F5379	300...500
180	315	355	375	584	GS2 S	T3	630	F630	F400	D185	LR9 F5381	380...630
200	355	375	400	635	GS2 V	T4	800	F800	F500	F185	TC800/1 + LRD 05	505...800
220	400	425	450	710	GS2 V	T4	800	F800	F500	F265	TC800/1 + LRD 05	505...800
250	450	475	500	800	GS2 V	T4	800	F800	F500	F265	TC1000/1 + LRD 05	630...1000
280	500	530	560	900	GS2 V	T4	1000	BM33•22	F630	F330	TC1000/1 LRD 05	630...1000
315	560	600	630	1000	GS2 V	T4	1000	BM33•22	F630	F400	TC1250/1 LRD 05	790...1250
335	630	670	710	1100	GS2 V	T4	1250	BP33•22	F630	F400	TC1250/1 LRD 05	790...1250
400	710	750	800	1260	On base	T4	2 x 800 (2)	BP33•22	F780	F400	TC1500/1 LRD 05	945...1500
450	800	800	800	1450	On base	T4	2 x 800 (2)	BP33•22	F780	F400	TC1750/1 LRD 05	100...1750
500	900	900	900	1600	On base	T4	2 x 800 (2)	BR33•22	F780	F500	TC2000/1 LRD 05	260...2000

(1) For power ratings greater than or equal to 400 kW at 415 V, use one LRD-05 on the current transformer.

(2) Check with the motor manufacturer whether the fuses should be fitted in parallel.

Operation

TeSys contactors

For rotor circuits of slip-ring motors

Applications

These contactors are used to eliminate starting resistance in the rotor circuit of slip-ring motors.

The most common application is for starters without inching and without rotor speed adjustment: pumps, fans, conveyors, compressors, ...

In the case of control by means of a manually operated master controller, the use of contactors with magnetic blow-out is recommended. Please consult your Regional Sales Office.


For hoisting applications, contactor selection must take into account the type of motor duty, the operating rate, the rotor voltage and current, the type of connection, the ambient temperature, etc.

Please consult your Regional Sales Office

Operations

The rotor circuit contactors are interlocked with the stator contactor and therefore do not open until after the stator contactor has opened, when the rotor voltage has disappeared, or virtually disappeared.

They make the current corresponding to the normal starting peak (1.5 to 2.5 times the rated rotor current) and open the circuit under no-load. Making and breaking are easy.

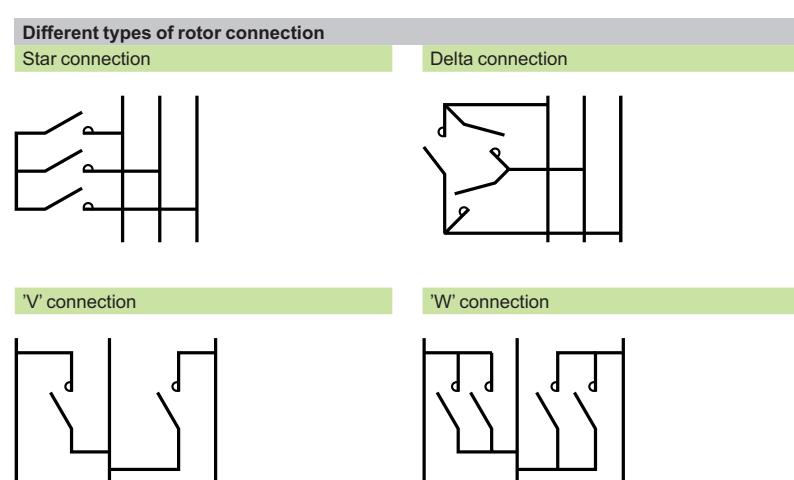

Selection

TeSys contactors

For rotor circuits of slip-ring motors

Contactor selection according to the type of connection

Rotor current and voltage coefficients

Coefficients to be applied to the operational current values shown in the table below.

Type of connection	Rotor I coefficient	3-phase rotor Ue (1)				With counter-current	
		Maximum		LC1 F	LC1 B		
Operational I						LC1 F	LC1 B
Star	1			2000 V	2000 V	1000 V	1000 V
Delta	1.4			1700 V	1700 V	850 V	850 V
In V	1			1700 V	1700 V	850 V	850 V
In W	1.6			1700 V	1700 V	850 V	850 V

Selection according to the operational current

The selection examples below take into account:

- a ratio of 2 between the maximum operational rotor voltage (Uer) and the rated stator operational voltage (Ues). This ratio is given in standard IEC 60947-4,
- a guarantee of occasional duty (making and breaking capacities) specified in the above standards.

Time current flowing	Contactor rating										
	LC1 D150	LC1 F185	LC1 F265	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 BL	LC1 BM	LC1 BP	LC1 BR
Intermediate contactor: with number of operating cycles ≤ 30/h											
10 s	450 A	550 A	800 A	1100 A	1500 A	2000 A	2500 A	2000 A	2400 A	3750 A	5000 A
30 s	280 A	400 A	550 A	730 A	1000 A	1500 A	2000 A	1200 A	1800 A	2600 A	3600 A
60 s	220 A	300 A	400 A	550 A	750 A	1200 A	1500 A	1000 A	1500 A	2200 A	3000 A
Intermediate contactor: with number of operating cycles ≤ 60/h											
5 s	450 A	550 A	800 A	1100 A	1500 A	2000 A	2500 A	2000 A	2400 A	3750 A	5000 A
10 s	330 A	450 A	620 A	860 A	1250 A	1800 A	2300 A	1600 A	2200 A	3400 A	4500 A
30 s	220 A	300 A	400 A	550 A	750 A	1200 A	1500 A	1000 A	1500 A	2200 A	3000 A
Intermediate contactor: with number of operating cycles ≤ 150/h for LC1 F and 120/h for LC1 B											
5 s	300 A	420 A	580 A	820 A	1150 A	1650 A	2200 A	1500 A	2100 A	3200 A	4200 A
10 s	250 A	350 A	430 A	600 A	850 A	1300 A	1600 A	1100 A	1600 A	2300 A	3200 A
Rotor short-circuit contactor and intermediate contactor: with number of operating cycles > 150/h for LC1 F and 120/h for LC1 B											
-	200 A	270 A	350 A	500 A	700 A	1000 A	1600 A	800 A	1250 A	2000 A	2750 A

5

Electrical durability

For automatic starting, the electrical durability is in the region of 1 million operating cycles.

(1) For use up to 3000 V, please consult your Regional Sales Office.

General

TeSys contactors

Long distance remote control

Voltage drop caused by the inrush current

When the operating coil of a contactor is energised, the inrush current produces a voltage drop in the control circuit cable caused by the resistance of the conductors, which can adversely affect closing of the contactor.

An excessive voltage drop in the control supply cables (both a.c. and d.c.) can lead to non closure of the contactor poles or even destruction of the coil due to overheating.

This phenomenon is aggravated by:

- a long line,
- a low control circuit voltage,
- a cable with a small c.s.a.,
- a high inrush power drawn by the coil.

The maximum length of cable, depending on the control voltage, the inrush power and the conductor c.s.a., is indicated in the graphs below.


Remedial action

To reduce the voltage drop at switch-on:


- increase the conductor c.s.a.,
- use a higher control circuit voltage,
- use an intermediate control relay.

Selection of conductor c.s.a.


These graphs are for a maximum line voltage drop of 5%. They give a direct indication of the copper conductor c.s.a. to be used for the control cable, depending on its length, the inrush power drawn by the contactor coil and the control circuit voltage (see example page 5/223).

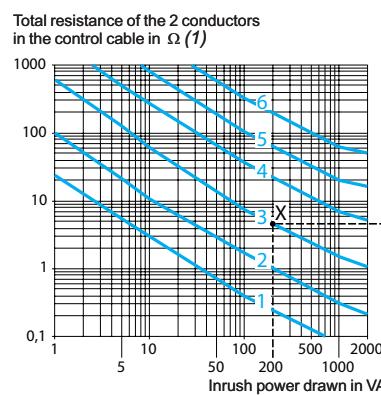


1 ~ 24 V	3 ~ 115 V	5 ~ 400 V
2 ~ 48 V	4 ~ 230 V	6 ~ 690 V

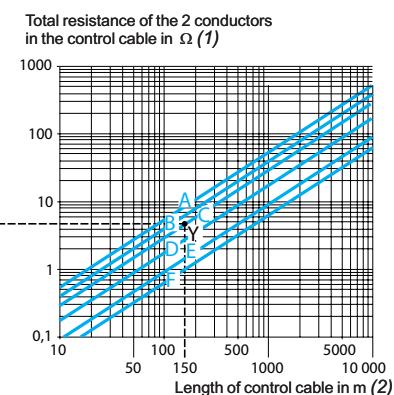

C.s.a. of copper cables					
A 0.75 mm ²	C 1.5 mm ²	E 4 mm ²			
B 1 mm ²	D 2.5 mm ²	F 6 mm ²			

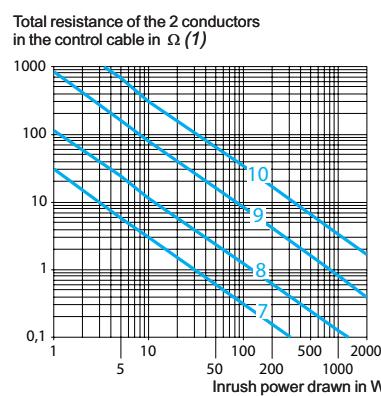

7 == 24 V	9 == 125 V
8 == 48 V	10 == 250 V

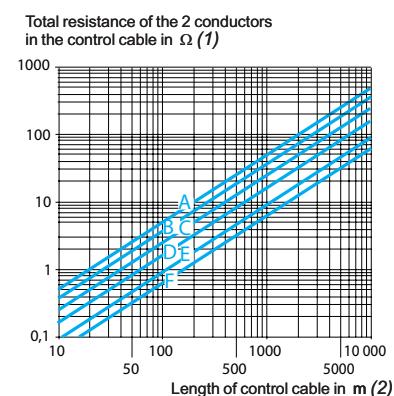

C.s.a. of copper cables					
A 0.75 mm ²	C 1.5 mm ²	E 4 mm ²			
B 1 mm ²	D 2.5 mm ²	F 6 mm ²			

(1) For 3-wire control, the current only flows in 2 of the conductors.

(2) This is the length of the cable comprising 2 or 3 conductors. (Distance between the contactor and the control device).

General (continued)

TeSys contactors

Long distance remote control

Voltage drop caused by the inrush current (continued)

What cable c.s.a. is required for the control circuit of an LC1 D40A, 115 V contactor, operated from a distance of 150 metres?

- Contactor LC1 D40A, voltage 115 V, 50 Hz: inrush power: 200 VA

On the left-hand graph on the page opposite, point X is at the intersection of the vertical line corresponding to 200 VA and the ~ 115 V voltage curve.

On the right-hand graph on the page opposite, point Y is at the intersection of the vertical line corresponding to 150 m and the horizontal line passing through point X.

Use the conductor c.s.a. indicated by the curve which passes through point Y, i.e.: 1.5 mm².

If point Y lies between two c.s.a. curves, choose the larger of the c.s.a. values.

Calculating the maximum cable length

The maximum permissible length for acceptable line voltage drop is calculated by the formula:

$$L = \frac{U^2}{SA} \cdot s \cdot K$$

where:

L : distance between the contactor and the control device in m (length of the cable),

U : supply voltage in V,

SA : apparent inrush power drawn by the coil in VA,

s : conductor c.s.a. in mm²,

K : factor given in the table below.

a.c. supply	SA in VA	20	40	100	150	200
	K	1.38	1.5	1.8	2	2.15

d.c. supply	Irrespective of the apparent inrush power SA, expressed in W
	K = 1.38

General (continued)

TeSys contactors

Long distance remote control

Residual current in the coil due to cable capacitance

When the control contact of a contactor is opened, the control cable capacitance is effectively in series with the coil of the electromagnet. This capacitance can cause a residual current to be maintained in the coil, with the risk that the contactor will remain closed.

This only applies to contactors operating on an a.c. supply.

This phenomenon is aggravated by:

- a long line length between the coil control contact and the contactor, or between the coil control contact and the power supply,
- a high control circuit voltage,
- a low coil consumption, sealed,
- a low value of contactor drop-out voltage.


The maximum control cable length, according to the contactor coil supply voltage, is indicated in the graph on the page opposite

Remedial action

Various solutions can be adopted to avoid the risk of the contactor remaining closed due to cable capacitance:

- use a d.c. control voltage, or,
- add a rectifier, connected as shown in the scheme below, but retaining an a.c. operating coil: in this way, rectified a.c. current flows in the control cable.

When calculating the maximum cable length, take the resistance of the conductors into account.

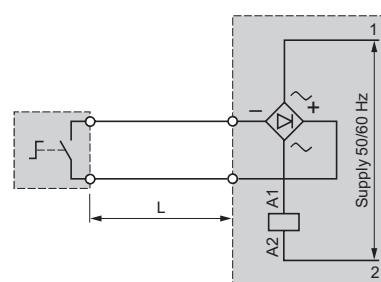

- Connect a resistor in parallel with the contactor coil (1).

Value of the resistance :

$$R \Omega = \frac{1}{10^3 C (\mu F)} \quad (C \text{ capacitance of the control cable})$$

Power to be dissipated :

$$PW = \frac{U^2}{R}$$

(1) To avoid increasing the voltage drop due to inrush current, this resistor must be brought into operation after the contactor has closed by using an N/O contact.


General (continued)

TeSys contactors

Long distance remote control

Residual current in the coil due to cable capacitance (continued)

These graphs are for a capacitance, between 2 conductors, of 0.2 µF/km. They make it possible to determine whether there is a risk of the contactor remaining closed due to the power drawn by the coil when sealed, as well as the control circuit voltage, according to the length of the control cable.

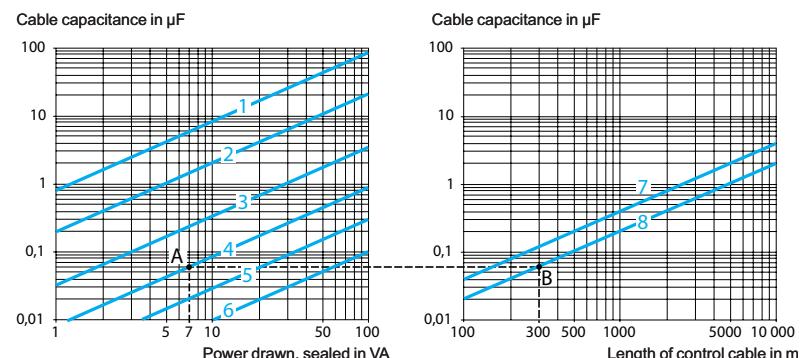

1	~ 24 V	3	~ 115 V	5	~ 400 V	7	3-wire control
2	~ 48 V	4	~ 230 V	6	~ 690 V	8	2-wire control

In the zones below the straight lines for 3-wire and 2-wire control respectively, there is a risk of the contactor remaining closed.

Examples

5

What is the maximum length for the control cable of an LC1 D12 contactor, operating on 230 V, with 2-wire control?

■ Contactor LC1 D12, voltage 230 V, 50 Hz: power sealed 7 VA.

On the left-hand graph, point A is at the intersection of the vertical line for 7 VA with the ~ 230 V voltage curve.

On the right-hand graph, point B is at the intersection of the horizontal line with the 2-wire control curve.

The maximum cable length is therefore 300 m.

In the same example, with a 600 m cable, the point lies in the risk zone. A resistor must therefore be connected in parallel with the contactor coil.

Value of this resistance :

$$R = \frac{1}{10^{-3} \cdot C} = \frac{1}{10^{-3} \cdot 0.12} = 8.3 \Omega$$

Power to be dissipated :

$$P = \frac{U^2}{R} = \frac{(220)^2}{8300} = 6 W$$

Alternative solution: use a d.c. control supply.

Calculating the cable length

The maximum permitted length of control cable to avoid the effects of capacitance is calculated using the formula:

$$L = 455 \cdot \frac{S}{U^2 \cdot C_o}$$

L : distance between the contactor and the control device in km (length of the cable),

S : apparent power, sealed, in VA,

U : control voltage in V,

C_o : line capacitance of the cable in µF/km.


Selection guide

TeSys contactors

Variable composition standard and high performance contactors

Applications

- Motor switching in categories AC-3
- Resistive load switching : heating, etc.
- Distribution circuit switching : line contactor
- Supply changeover switching : circuit coupling etc
- Transformer, capacitor, lighting switching

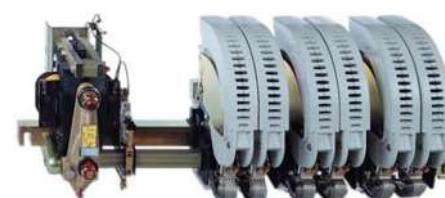

Type

Standard contactors

Rated operational current	AC-3	80 A	170 A	250 A	350 A	460 A	700 A
	AC-4/DC-5	72 A/–	145 A/–	205 A/–	290/470 A (1)	380/630 A (1)	584/1000 A (1)
	AC-1	80 A	200 A	300 A	470 A	630 A	1000 A

Rated operational voltage


690 V ~					
---------	---------	---------	---------	---------	---------

Control circuit

Standard applications

a.c. supply ~

d.c. supply ---



Contactors

Type

CV1

Rating


F	G	H	J	K	L
---	---	---	---	---	---

Pages

Please consult our catalogue "TeSys variable composition contactors".

(1) With PN3 poles.

- Motor switching in categories AC-4, DC-5
- Inductive circuit switching
- High voltage d.c. switching : crane electromagnets, railway locomotives
- Load switching at high operating rates

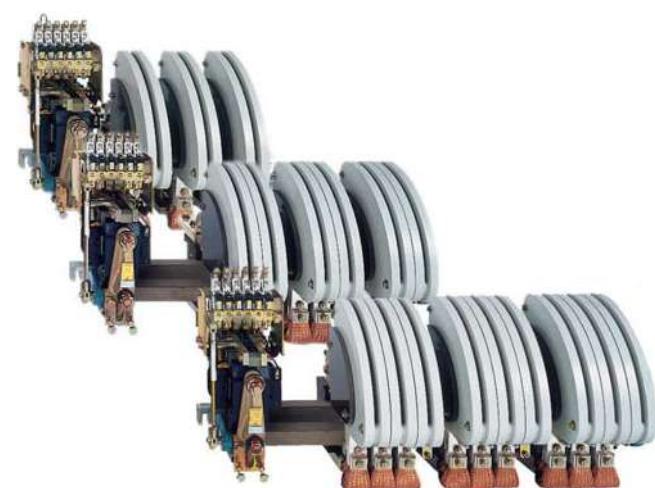


High performance contactors

80 A	200 A	250 A	320 A	460 A	800 A	1000 A	1500 A	1800 A
80/80 A	170/200 A	208/300 A	250/320 A	380/500 A	720/800 A	830/1000 A	1200/1800 A	1500/2500 A
80A	200 A	300 A	320 A	500 A	800 A	1250 A	2000 A	2750 A
1000 V ~	1000 V ~	1000 V ~	1000 V ~	1000 V ~	1000 V ~	1000 V ~	1000 V ~	1000 V ~


5

Low consumption applications

a.c. supply via economy resistor



d.c. supply via economy resistor



CV3

F	G	H	J	K
----------	----------	----------	----------	----------

CV3 and LC1 B

L	M	P	R
----------	----------	----------	----------

Selection

TeSys contactors

Variable composition contactors

CV1 B (80 to 1000 A) and CV3 B (80 to 500 A)

Selection

To define a contactor

The criteria required to define the composition of a contactor are:

- the number of N/O and N/C power poles,
- the current and power supply voltage,
(note: on a d.c. supply, the time constant $\frac{L}{R}$ of the load must be known in order to define the number of poles to be wired in series to break the arc),
- the control circuit voltage,
- the number of auxiliary contacts.

To order a contactor

Contactor selectable by code combinations

- Use the symbol combination table on page 5/229.
- Check the maximum number of poles in the selection table on page 5/230.
- Check the operational currents possible below (selection restrictions).

Contactor not selectable by code combinations

- For a composition that cannot be selected using these tables, use order form CF 452, page 5/231.

Selection restrictions

Contactor type		CV1 BF CV3 BF	CV1 BG CV3 BG	CV1 BH CV3 BH	CV1 BJ CV3 BJ	CV1 BK CV3 BK	CV1 BL
Rated operational current	11 A	E	-	-	-	-	-
	13 A	M	-	-	-	-	-
	20 A	N	-	-	-	-	-
	40 A	P	-	-	-	-	-
	50 A	Q	Q	-	-	-	-
	80 A	F	-	-	-	-	-
	125 A	-	R	R	-	-	-
	200 A	-	G	G	-	-	-
	250 A	-	-	-	S	-	-
	300 A	-	-	H	-	-	-
	320 A	-	-	-	T	-	-
	400 A	-	-	-	-	U	-
	470 A	-	-	-	J	-	-
	500 A	-	-	-	-	V	-
	630 A	-	-	-	-	K	K
	1000 A	-	-	-	-	-	L
0 Without arc chamber	Z	Z	Z	Z	Z	Z	Z

Symbol combination table

TeSys contactors

Variable composition contactors

CV1 B (80 to 1000 A) and CV3 B (80 to 500 A)

Reference to be constituted (see examples on page 5/230)							
Type of contactor related to application							
~ 690 V, ... 220 V/pole	CV1 B						
~ 1000 V, ... 440 V/pole	CV3 B						
Contactor size AC-1/AC-3							
CV1 : 80/80 A	CV3 : 80/80 A	F					
CV1 : 200/170 A	CV3 : 200/200 A	G					
CV1 : 300/250 A	CV3 : 300/285 A	H					
CV1 : 470/350 A	CV3 : 320/320 A	J					
CV1 : 630/460 A	CV3 : 500/460 A	K					
CV1 : 1000/700 A		L					
Number of poles							
N/O poles	1 N/O	1					
	2 N/O	2					
	3 N/O	3					
	4 N/O	4					
	5 N/O	5					
N/C poles	1 N/C		1				
	2 N/C		2				
	3 N/C		3				
No main poles		0	Z	0	Z		
Operational current (determines the blow-out coil size)							
11 A		E	E				
13 A		M	M				
20 A		N	N				
40 A		P	P				
50 A		Q	Q				
80 A		F	F				
125 A		R	R				
200 A		G	G				
250 A		S	S				
300 A		H	H				
320 A		T	T				
400 A		U	U				
470 A		J	J				
500 A		V	V				
630 A		K	K				
1000 A		L	L				
Without breaking		Z	Z				
Control circuit voltage		B					
24 V		E					
48 V		F					
110 V		K					
120 V		G					
127 V		L					
208 V		M					
220 V		P					
230 V		U					
240 V		Q					
380 V		V					
400 V		N					
415 V		R					
440 V		T					
480 V		S					
500 V		X					
600 V							
Operating frequency							
50 Hz		5					
60 Hz		6					
50/60 Hz (rectifier + economy resistor)		7					
...		D					
... + economy resistor		R					
Auxiliary contacts (type ZC4 GM)							
N/O instantaneous	1 N/O	1					
	2 N/O	2					
	3 N/O	3					
	4 N/O	4					
N/C instantaneous	1 N/C		1				
	2 N/C		2				
	3 N/C		3				
	4 N/C		4				
No instantaneous auxiliary contacts		0	0				
On-delay	1 C/O					J	
Off-delay	1 C/O					N	

To check whether the symbol combinations are possible, refer to the selection information and guide on pages 5/228 and 5/230.
If in doubt, fill out order form CF 452.

5

Selection

TeSys contactors

Variable composition contactors

CV1 B (80 to 1000 A) and CV3 B (80 to 500 A)

Guide to selection of code combinations

CV1 contactors: maximum number of power poles

Contactor type	CV1 BF		CV1 BG		CV1 BH		CV1 BJ		CV1 BK		CV1 BL	
Pole type	N/O	N/C										
Number of poles	5	0	4	0	4	0	4	0	4	0	4	2 (1)
	0	2	0	2	0	2	0	2	0	2	0	1 (2)
	2	1	2	1	2	1	2	1	2	1	—	—

CV3 contactors: maximum number of power poles

Contactor type	CV3 BF		CV3 BG		CV3 BH		CV3 BJ		CV3 BK	
Pole type	N/O	N/C								
Number of poles	5	0	4	0	4	0	2	0	2	0
	0	2	0	2	0	2	—	—	—	—
	1	2	1	2	—	—	—	—	—	—
	3	1	2	1	2	1	—	—	—	—

CV1 or CV3 contactors:

Maximum number of auxiliary contacts: 4 + 1 time delay if necessary

Selection restrictions, according to coil type:

(1) 4-pole with economy resistor.

(2) 2-pole with economy resistor.

Examples

■ Switching of single-phase capacitor: 400 V - 80 A - 1 N/O main pole. 220 V / 50 Hz control circuit voltage, 1 N/O and 1 N/C auxiliary contacts.

Reference: **CV1 BF1F0ZM511**.

■ Switching of d.c. heating circuits: 800 V - 150 A - 2 N/O main poles - 48 V --- control circuit, instantaneous auxiliary contact 1 N/O + 1 on-delay.

Reference: **CV3 BG2W0ZED10J**.

Other versions

To obtain a composition with more main poles or with more than 4 auxiliary contacts, please use **order form CF 452** (see page 5/231).

Reference constitution or order form CF 452

TeSys contactors

Variable composition contactors
CV1 and CV3

(1) Standard delivery time: 3 weeks, from receipt of order. For faster delivery, please consult your Regional Sales Office.



5/231

Selection, characteristics

TeSys contactors 3-pole vacuum contactors and reversing contactors

Selection

Contactor size	LC1 V160	LC1 V320	LC1 V610	
For utilisation category AC-3				
Maximum operational current in AC-3	A	160	320	610
Rated operational power P (standard power ratings of motors)	230 V kW	45	90	160
	400 V kW	75	160	300
	525 V kW	110	220	400
	690 V kW	150	280	560
	1000 V kW	200	400	800
	1500 V kW	280	600	930
For 3-phase motors conforming to CSA standards				
Rated operational power P (standard power ratings of 3-phase CSA motors)	200 V hp	50	100	150
	240 V hp	60	125	200
	380 V hp	100	200	300
	480 V hp	125	250	400
	600 V hp	150	300	500
	800 V hp	200	400	700
	1000 V hp	250	500	1000
	1500 V hp	400	800	1300
For switching 3-phase capacitors				
Rated operational power P	240 V kVAR	47	94	176
	480 V kVAR	95	190	356
	600 V kVAR	100	200	400
	1500 V kVAR	250	500	1000
For switching the primaries of 3-phase transformers (LV/LV)				
Rated operational power P	208 V kVA	20	41	81
	240 V kVA	23	47	94
	480 V kVA	47	94	188
	600 V kVA	59	117	234

5

Environment characteristics

Contactor type			LC1 V160	LC1 V320	LC1 V610
Shock resistance (1/2 sine wave = 11 ms)	Contacts closed		10 gn	10 gn	10 gn
	Contacts open		10 gn	10 gn	10 gn
Vibration resistance	10...500 Hz		2 gn	2 gn	2 gn
Operating altitude	Above sea level	Maximum	m	3600	3600
	Below sea level	Minimum	m	2500	4500
Ambient air temperature around the device	Storage	°C	-40...+80	-40...+80	-40...+80
	Operation 0.8...1.1 Uc	°C	-5...+55	-5...+55	-5...+55
	Permissible for operation at Uc	°C	-10...+75	-10...+75	-10...+75
Degree of protection	Conforming to IEC 60529		IP 00	IP 00	IP 00
Operating position			Any	Any	Any
Cabling	Cable c.s.a.	mm ²	70	185	2 x 185
	Key for hex. screws	mm	Allen 4	20	20
	Tightening torque	N.m	14	39	39

Control circuit characteristics

Rated insulation voltage (Ui)	To earth	V	2000	2000	2000
Consumption	Inrush	VA	300	600	1700
	Sealed	VA	30	20	28
Permissible control circuit voltage			0.8...1.1 Uc	0.8...1.1 Uc	0.8...1.1 Uc
Closing time (1)		ms	18...22	24...32	24...32
Opening time (1)		ms	95...115	95...115	95...115

(1) The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles. The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.

Characteristics (continued)

TeSys contactors

3-pole vacuum contactors
and reversing contactors

5

Contactor type		LC1 V160	LC1 V320	LC1 V610
Main pole characteristics				
Rated insulation voltage (Ui)	V	1500	1500	1500
Rated impulse withstand voltage (Uimp)	kV	8	8	8
Conforming to standards		EN 60947-4-1 - IEC 60947-4-1		
Approvals		CSA		
Conventional rated thermal current (Ith)	A	160	320	630
Rated operational current (le)	A	160	320	630
θ ≤ 40 °C AC-1	A	160	320	630
θ ≤ 55 °C AC-3	A	160	320	610
θ ≤ 55 °C AC-4	A	130	270	540
Electrical durability in millions of operating cycles (400 V at I max)	AC-1 AC-3 AC-4	1.2 1.6 0.18	1 1.5 0.15	1 1.5 0.12
Mechanical durability	In millions of operating cycles	5	2.5	2
Maximum operating rate in operating cycles per hour	Mechanical AC-1 AC-3 AC-4	1200 900 900 450	1200 900 900 450	1200 900 900 450
Maximum making capacity	Ue = 1500 V To IEC 60947 (Irms)	A 1900	3800	7300
Maximum breaking capacity	Ue = 1500 V To IEC 60947 (Irms)	A 1600	3200	6100
Maximum permissible current	For 1 s For 2 s For 10 s For 30 s	A 2400 A 2000 A 1600 A 960	4500 3750 3200 1920	9000 7580 6100 3600
Short-circuit protection at le in cat. AC-3 max.	aM fuse	A 160	400	630
Auxiliary contact characteristics				
Rated insulation voltage (Ui)	V	690		
Conventional rated thermal current (Ith)	A	10		
Rated operational current (le)	AC-15, 230 V AC-15, 400 V AC-15, 500 V DC-13, 24 V DC-13, 110 V DC-13, 220 V	A 0.78 A 0.45 A 0.35 A 1.1 A 0.24 A 0.12		
Cabling	Cable c.s.a.	mm ²	2.5	
Short-circuit protection	gG fuse	A	10	
Operating time (1) (at 100 % of Uc)	"C" "O"	ms	± 5 ± 5	

(1) Operating time in relation to the main contacts.

References

TeSys contactors

3-pole vacuum contactors

and reversing contactors


Power and control circuits

a.c. supply


105194



LC1 V320



LC2 V610



LA9 V974

5

Vacuum contactors

Standard power ratings 50/60 Hz in category AC-3							Rated operational current Ie	Instan- taneous auxiliary contacts	Control circuit voltage (50/60 Hz)	Basic reference (1)	Weight
230 V	400 V	525 V	690 V	1000 V	AC-3	AC-1					kg
45	75	110	150	200	160	160	2	1	(1)	LC1 V160●●	3.800
90	160	220	280	400	320	320	1	1	(1)	LC1 V320●●	10.500
160	300	400	560	800	610	630	1	1	(1)	LC1 V610●●	13.000

Reversing vacuum contactors

The reversing contactor range comprises :

- for 160 A rating, a kit with set of power connections allowing assembly of the starter,
- for 320 and 610 A ratings, a complete starter, ready for use.

Standard power ratings 50/60 Hz in category AC-3							Rated operational current Ie	Instan- taneous auxiliary contacts	Control circuit voltage (50/60 Hz)	Basic reference (1)	Weight
230 V	400 V	525 V	690 V	1000 V	AC-3	AC-1					kg
45	75	110	150	200	160	160	2	1	-	LA9 V974 (2)	1.200
90	160	220	280	400	320	320	1	1	110-120 V	LC2 V320FE7	30
									220-240 V	LC2 V320P7	30
									380-415 V	LC2 V320V7	30
160	300	400	560	800	610	630	1	1	110-120 V	LC2 V610FE7	36
									220-240 V	LC2 V610P7	36

(1) Basic reference; add code indicating control circuit voltage.

Standard control circuit voltages :

Volts 50/60 Hz	110...120	220...240	380...415	440...480	550...600
Item	FE7	P7	V7	R7	X7

(2) Kit containing a mechanical interlock, a set of power connections and a fixing plate. To build a complete reversing contactor, order contactors LC1 V160●● separately.

Selection :
page 5/232

Characteristics :
pages 5/232 and 5/233

Dimensions :
page 5/236

Schemes :
page 5/236

5/234

Schneider
Electric

References (continued)


TeSys contactors

3-pole vacuum contactors


and reversing contactors

Power and control circuits

a.c. supply



LA1 VN11



LX1 V320**

500310

500308

Instantaneous auxiliary contact blocks (1)

Number of contacts	Maximum number of blocks per contactor	Auxiliary contacts	Reference	Weight kg
2	4	1 1	LA1 VN11	0.030
—	2	— 2	LA1 VN02	0.030
2	—	2 —	LA1 VN20	0.030
1	1	1 1	LA1 VN11X (2)	0.030

50/60 Hz coils

Rated voltage V	Voltage code	Reference	Weight kg
For contactors LC1 V160			
110...120	FE7	LX1 V160FE7	0.400
220...240	P7	LX1 V160P7	0.400
380...415	V7	LX1 V160V7	0.400
440...480	R7	LX1 V160R7	0.400
550...600	X7	LX1 V160X7	0.400
For contactors LC1 V320			
110...120	FE7	LX1 V320FE7	0.800
220...240	P7	LX1 V320P7	0.800
380...415	V7	LX1 V320V7	0.800
440...480	R7	LX1 V320R7	0.800
550...600	X7	LX1 V320X7	0.800
For contactors LC1 V610			
110...120	FE7	LX1 V610FE7	0.800
220...240	P7	LX1 V610P7	0.800
380...415	V7	LX1 V610V7	0.800
440...480	R7	LX1 V610R7	0.800
550...600	X7	LX1 V610X7	0.800

(1) LC1 V160 : auxiliary contact blocks mounted at the top of the contactor, with no change to the overall dimensions.

LC1 V320 or LC1 V610 : 2 auxiliary contact blocks mounted on the RH and LH side of the contactor, with no change to the overall dimensions.

(2) For LC1 V160 : 1 N/C contact for the coil + 1 N/O contact.




5

*Dimensions,
mounting,
schemes*




TeSys contactors
3-pole vacuum contactors

Dimensions, mounting




LC1 V160



LC1 V320

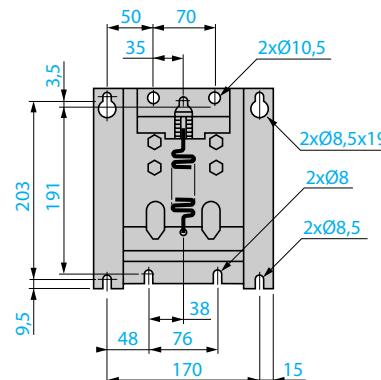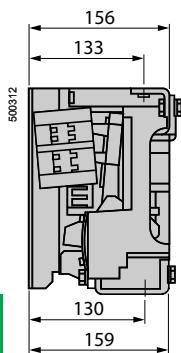


LC1 V610

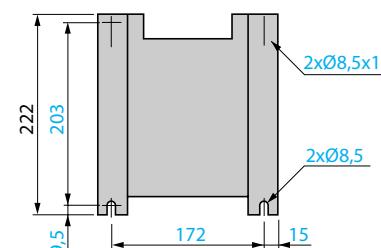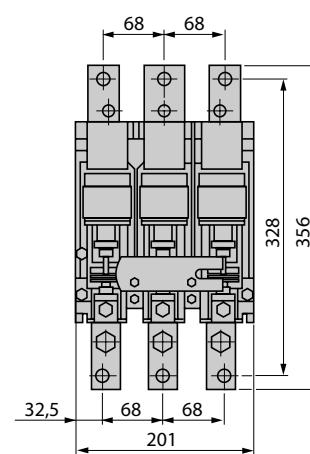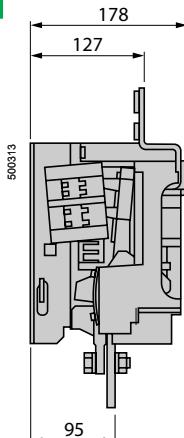


Schemes

LC1 V160




LC1 V320, V610




Auxiliary contact blocks


LA1 VN11 1 N/O & 1 N/C | LA1 VN02 2 N/C



LA1 VN20 2 N/O



LA1 VN11X 1 N/O




*Dimensions,
mounting*


TeSys reversing contactors
3-pole reversing vacuum contactors

Dimensions, mounting


LA9 V974 + 2 x LC1V160

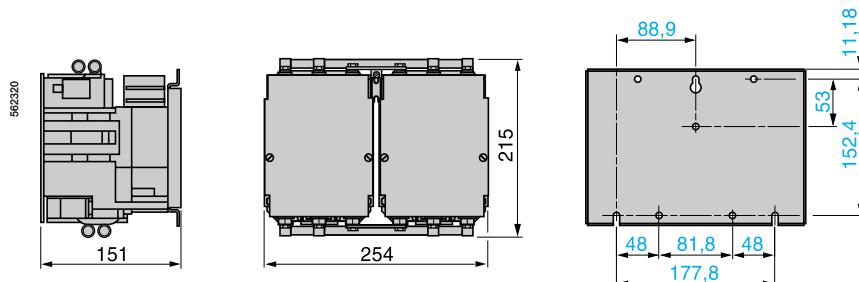

LC2 V320

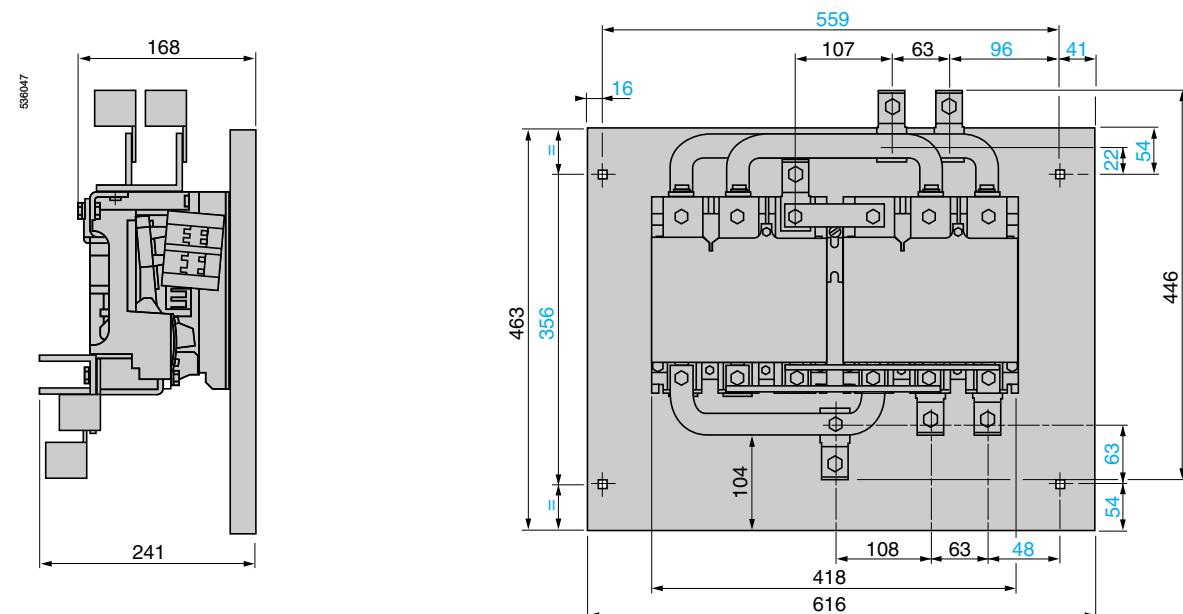

LC2 V610

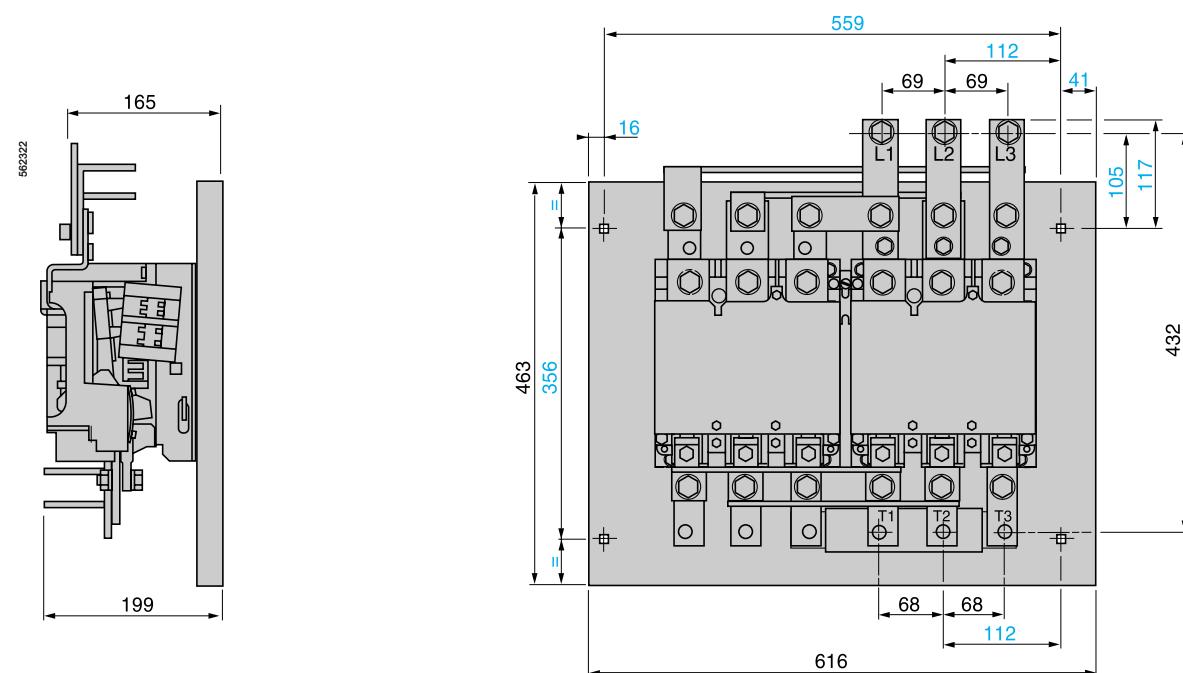


Schemes



TeSys reversing contactors
3-pole reversing vacuum contactors

Schemes

LA9 V974 + 2 x LC1V160

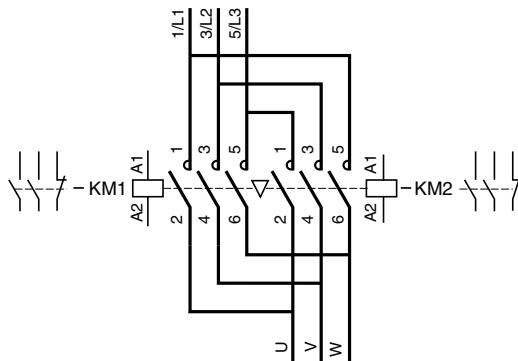

LC2 V320

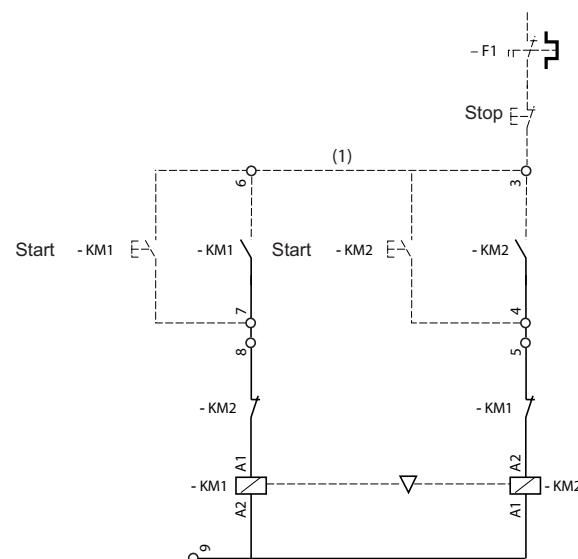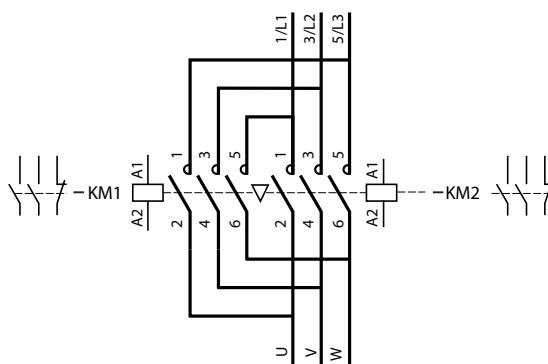



(1) Dotted line indicates wiring to be installed by the customer.

Schemes (continued)

TeSys reversing contactors
3-pole reversing vacuum contactors

Schemes (continued)

LC2 V610

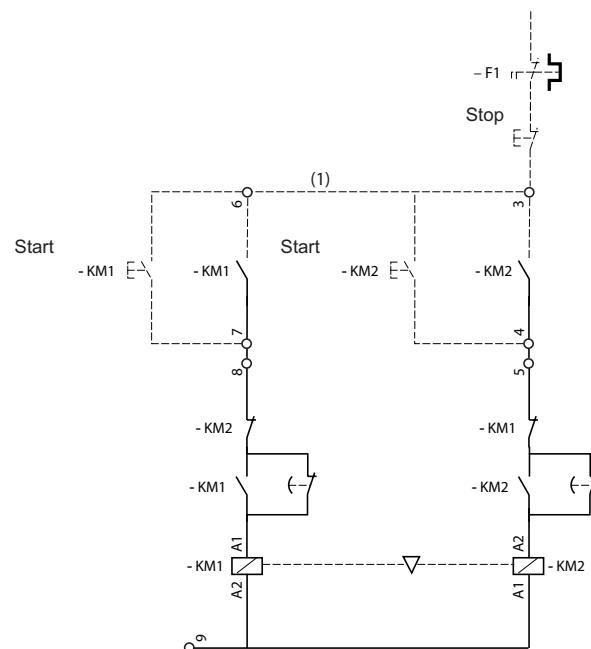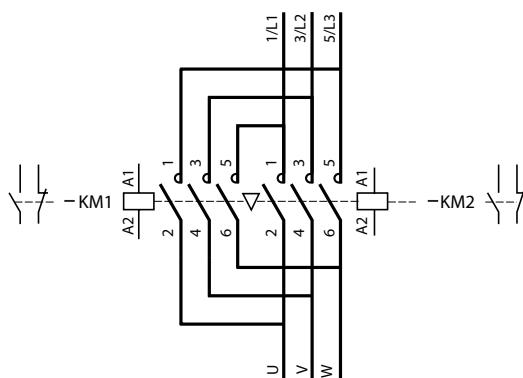

(1) Dotted line indicates wiring to be installed by the customer.

General

TeSys contactors

Magnetic latching contactors

Magnetic latching contactors

Magnetic latching contactors of both block and bar mounted types are fitted with a special electromagnet which enables them to remain in the "On" position when the coil is no longer energised.

Applications

The special properties of magnetic latching contactors make them suitable for a large number of applications.

Properties

- Retention of the sequence memory in automatic control equipment in the event of loss of control voltage.
- Energy saving, since the source of supply to the coil does not need to supply current when the contactor is latched in the closed state.
- Change of state from "Closed" to "Open" by current signal through the coil.
- Unaffected by mains interference.
- Utilisation of contactors beyond their breaking capacity, as operations are performed off-load.
- Contactors are silent in the latched position.

Applications

- Refineries, power stations, excitation circuits.
- Contactors remaining in the closed state for long periods.
Examples: refineries, power supplies, low voltage distribution
- Selective opening control.
- No unwanted opening and closing of the main power poles.
- Current carrying at voltages up to 1000 Volts.

Operation of the electromagnet

CR1 F block contactors

CR1 F magnetic latching contactors are fitted with a double coil with 3 terminals comprising a latching winding and an unlatching winding. The 2 windings have a common point which can necessitate special wiring precautions when the latching supply is separate from the unlatching supply.

The power supplies may be a.c. or d.c. For d.c. operation, the polarities indicated must be complied with.

Operating precautions:

- the 2 windings must not be supplied simultaneously,
- a winding must not be supplied continuously,
- supply to the coils must be via pulsed contacts.

Manual opening:

if the control voltage is not present, the contactor can be unlatched manually.

CR1 B bar mounted contactors

CR1 B magnetic latching contactors are fitted with a single coil, supplied with d.c. or with a.c. through a rectifier.

Latching is obtained by direct supply of the coil in one direction of current flow.

Unlatching is obtained by a reverse current, adjusted by resistors.

Mechanical latching contactors

LC1 D block contactors

For applications using smaller contactor sizes than those described on page 5/241, it is possible to obtain the same function by the addition of a mechanical latch block type LA6 DK, which can be mounted on LC1 D contactors (see page 5/80).

Selection

TeSys contactors

Magnetic latching contactors
Selection guide for direct on-line starting
of squirrel cage motors

Continuous or intermittent duty up to 30 operating cycles/hour

Motor (1)												3-pole contactor	3-pole differential thermal overload relay		3 fuses Type	
220 V			380 V			415 V			440 V			(2)	Reference	Setting range	aM	BS-88
P	In	P	In	P	In	P	In	P	In	P	In	Reference		A	A	A
kW	HP	A	kW	HP	A	kW	HP	A	kW	HP	A					
25	35	85	—	—	—	—	—	—	—	—	—	CR1 F150	LR9 F5367	60...100	100	125
30	40	103	51	70	98	55	75	100	59	80	97	CR1 F150	LR9 F5369	90...150	100	160
33	45	113	55	75	105	—	—	—	—	—	—	CR1 F150	LR9 F5369	90...150	125	160
—	—	—	59	80	112	59	80	105	63	85	109	CR1 F150	LR9 F5369	90...150	125	160
—	—	—	63	85	117	63	85	115	—	—	—	—	—	—	—	—
37	50	126	75	100	138	75	100	135	75	100	125	CR1 F150	LR9 F5369	90...150	160	200
40	54	134	—	—	—	—	—	—	80	110	131	—	—	—	—	—
45	60	150	80	110	147	80	110	138	90	125	146	CR1 F185	LR9 F5369	90...150	160	200
51	70	170	90	125	170	90	125	165	100	136	162	CR1 F185	LR9 F5371	132...220	200	250
55	75	182	—	—	—	100	136	182	—	—	—	—	—	—	—	—
59	80	195	100	138	188	110	150	200	110	150	178	CR1 F265	LR9 F5371	132...220	250	315
63	85	203	110	150	205	—	—	—	129	175	209	—	—	—	—	—
75	100	240	129	175	242	129	175	230	132	180	215	CR1 F265	LR9 F7375	200...330	250	315
—	—	—	132	180	245	132	180	240	—	—	—	—	—	—	—	—
—	—	—	—	—	—	140	190	250	140	190	227	CR1 F265	LR9 F7375	200...330	315	400
80	110	260	140	190	260	147	200	260	147	200	236	CR1 F400	LR9 F7375	200...330	315	400
—	—	—	147	200	273	150	205	270	150	205	246	—	—	—	—	—
—	—	—	150	205	280	160	220	280	160	220	256	—	—	—	—	—
90	125	295	160	220	300	—	—	—	180	245	289	CR1 F400	LR9 F7375	200...330	315	400
—	—	—	—	—	—	—	—	—	185	250	295	—	—	—	—	—
100	136	325	180	245	333	180	245	320	200	270	321	CR1 F400	LR9 F7379	300...500	400	500
110	150	356	185	250	342	185	250	325	220	300	353	—	—	—	—	—
—	—	—	200	270	370	200	270	340	250	340	401	CR1 F400	LR9 F7379	300...500	400	500
—	—	—	—	—	—	200	300	385	—	—	—	—	—	—	—	—
129	175	420	220	300	408	—	—	—	257	350	412	CR1 F500	LR9 F7379	300...500	500	630
132	180	425	250	340	460	250	340	425	280	380	450	CR1 F500	LR9 F7381	380...630	500	630
140	190	450	—	—	—	257	350	450	—	—	—	—	—	—	—	—
147	200	472	—	—	—	—	—	—	295	400	473	CR1 F500	LR9 F7381	380...630	500	630
—	—	—	257	350	475	280	380	475	300	410	481	CR1 F630	LR9 F7381	380...630	500	630
—	—	—	—	—	—	295	400	500	—	—	—	—	—	—	—	—
150	205	483	280	380	510	300	410	510	315	430	505	CR1 F630	LR9 F7381	380...630	630	800
160	220	520	295	400	546	315	430	535	335	450	518	—	—	—	—	—
180	245	578	300	410	565	335	450	550	355	480	549	CR1 F630	LR9 F7381	380...630	630	800
185	250	595	315	430	584	355	480	580	375	500	575	—	—	—	—	—
200	270	626	335	450	620	375	500	610	400	454	611	CR1 F630	LR9 F7381	380...630	800	1000
220	★	700	355	★	635	400	★	650	425	★	650	CR1 BL33	LR2 F8383	500...800	800	1000
—	—	—	375	★	670	425	★	690	445	★	680	—	—	—	—	—
—	—	—	400	★	710	445	★	730	450	★	690	—	—	—	—	—
—	—	—	—	—	—	450	★	740	475	★	730	—	—	—	—	—
250	★	800	425	★	760	475	★	780	500	★	780	CR1 BM33	LR2 F8383	500...800	800	1000
257	★	826	445	★	790	500	★	820	530	★	825	CR1 BM33	LR2 F8383	630...1000	1000	1250
280	★	900	450	★	800	530	★	870	560	★	870	—	—	—	—	—
295	★	948	475	★	850	560	★	920	600	★	920	—	—	—	—	—
300	★	980	500	★	900	600	★	978	630	★	965	—	—	—	—	—
315	★	990	530	★	950	—	—	—	—	—	—	—	—	—	—	—

5

(1) The ratings are for standard 220/230 V, 380/400 V, 415 or 440 V motors. The overload relays should preferably be set to the motor full-load current shown on the motor rating plate. For other power ratings, select the overload relay with the appropriate range; the associated contactor and fuses must have ratings equal to or immediately greater than In.

(2) Reference to be completed, see page 5/250.

* There are no standard power ratings for these motors.

Characteristics :
pages 5/246 to 5/249

References :
pages 5/250 to 5/259

Dimensions :
pages 5/260 to 5/264

Schemes :
pages 5/266 and 5/267

Schneider
Electric

5/241

Selection

TeSys contactors

Magnetic latching contactors

Selection guide for utilisation category AC-3

Contactor size		CR1 F150	CR1 F185	CR1 F265	CR1 F400	CR1 F500	CR1 F630	CR1 BL	CR1 BM	CR1 BP	CR1 BR
Rated operational current in AC-3 ($0 \leq 55^{\circ}\text{C}$)											
440 V	A	150	185	265	400	500	630	750	1000	1500	1800
500 V	A	135	175	245	385	500	540	750	900	1200	1500
660/690 V	A	130	140	230	365	435	470	700	800	900	1100
1000 V	A	47	73	95	135	270	330	400	400	500	600
Rated operational power (standard motor power ratings)											
220...240 V	kW	40	55	75	110	147	200	220	280	425	500
	HP	54	75	100	150	200	270	300	380	580	680
380...400 V	kW	75	90	132	200	250	335	400	500	750	900
	HP	100	185	180	270	340	450	545	680	1000	1220
415 V	kW	80	100	140	220	280	375	425	530	800	900
	HP	110	136	180	300	380	500	580	720	1100	1220
440 V	kW	80	100	140	250	295	400	450	560	800	900
	HP	110	136	190	340	400	545	610	760	1100	1220
500 V	kW	90	110	160	257	355	400	500	600	750	900
	HP	125	150	220	350	480	545	680	810	1000	1220
660/690 V	kW	100	110	160	280	335	450	560	670	750	900
	HP	—	—	—	—	—	610	760	910	1000	1220
1000 V	kW	65	100	147	185	335	450	530	530	670	750
	HP	—	136	200	250	—	610	720	720	910	1000

Maximum operating rate in operating cycles/hour, at rated operational power with an on-load factor = 85%: 750 for CR1 F150 to F265, 500 for CR1 F400 to F630 and 120 for CR1 B.

Selection



TeSys contactors

Magnetic latching contactors

Selection according to required electrical durability

Use in category AC-3 (Ue ≤ 440 V) (1) (θ ≤ 55 °C)

The current (Ic) in AC-3 is equal to the rated operational current (Ie) drawn by the motor.

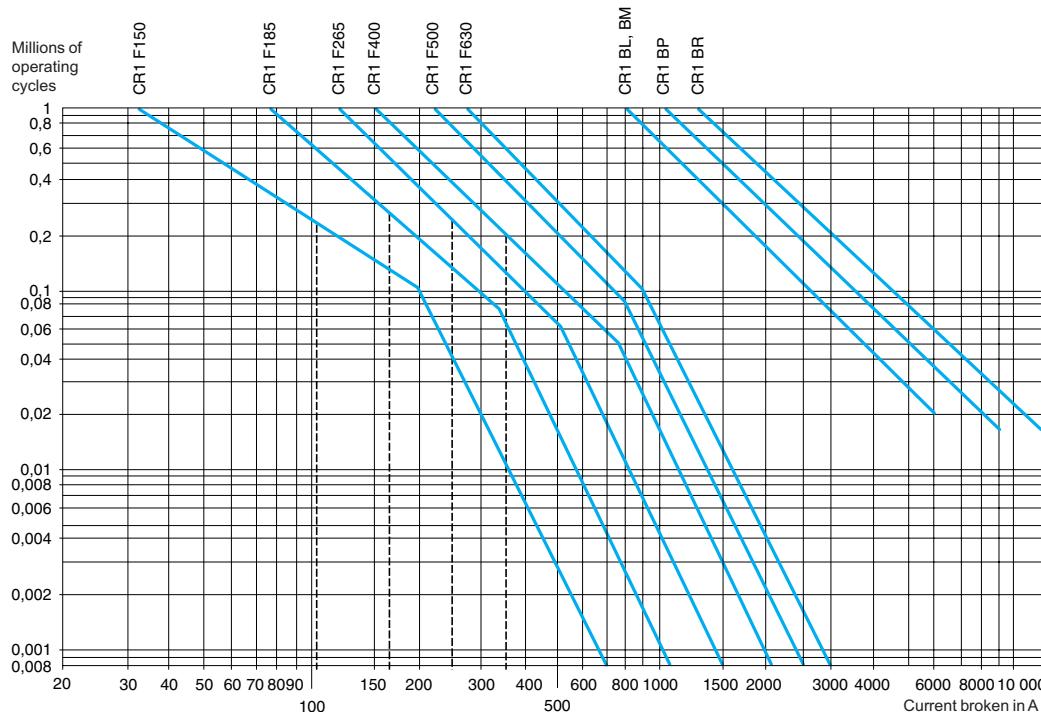

5

Example:

Asynchronous motor with P = 50 kW, Ue = 380 V, Ie = 100 A, Ic = Ie = 100 A, or asynchronous motor with P = 55 kW, Ue = 415 V, Ie = 100 A, Ic = Ie = 100 A

600 000 operating cycles required.

The above selection curves show the contactor rating needed, CR1 F185.

(1) For 660 V, multiply the number of operating cycles by 0.8.

Characteristics :
pages 5/246 to 5/249

References :
pages 5/250 to 5/259

Dimensions :
pages 5/260 to 5/264

Schemes :
pages 5/266 and 5/267

Schneider
Electric

5/243

Selection

TeSys contactors

Magnetic latching contactors

Selection guide for utilisation category AC-1
and according to required electrical durability

Maximum operational current (on-load factor ≥ 0.95)

Maximum operating rate: 120 operating cycles/hour


Contactor size		CR1 F150	CR1 F185	CR1 F265	CR1 F400	CR1 F500	CR1 F630	CR1 BL	CR1 BM	CR1 BP	CR1 BR	
Cable c.s.a.	mm ²	120	150	185	—	—	—	—	—	—	—	
Number of bars		—	—	—	2	2	2	2	2	3	4	
Bar c.s.a.	mm	—	—	—	30 x 5	40 x 5	60 x 5	50 x 5	80 x 5	100 x 5	100 x 5	
Operational current in category AC-1 at ambient temperature	≤ 40 °C	A	250	275	350	500	700	1000	800	1250	2000	2750
	≤ 55 °C	A	250	275	300	430	580	850	700	1100	1750	2400
	≤ 70 °C	A	170	180	250	340	500	700	600	900	1500	2000

Increase in operational current by parallel connection of poles

Apply the following coefficients to the above currents; these coefficients take into account an often unbalanced distribution of current between the poles:

- 2 poles in parallel: K = 1.6
- 3 poles in parallel: K = 2.25
- 4 poles in parallel: K = 2.8

Electrical durability (Ue ≤ 440 V) (1)

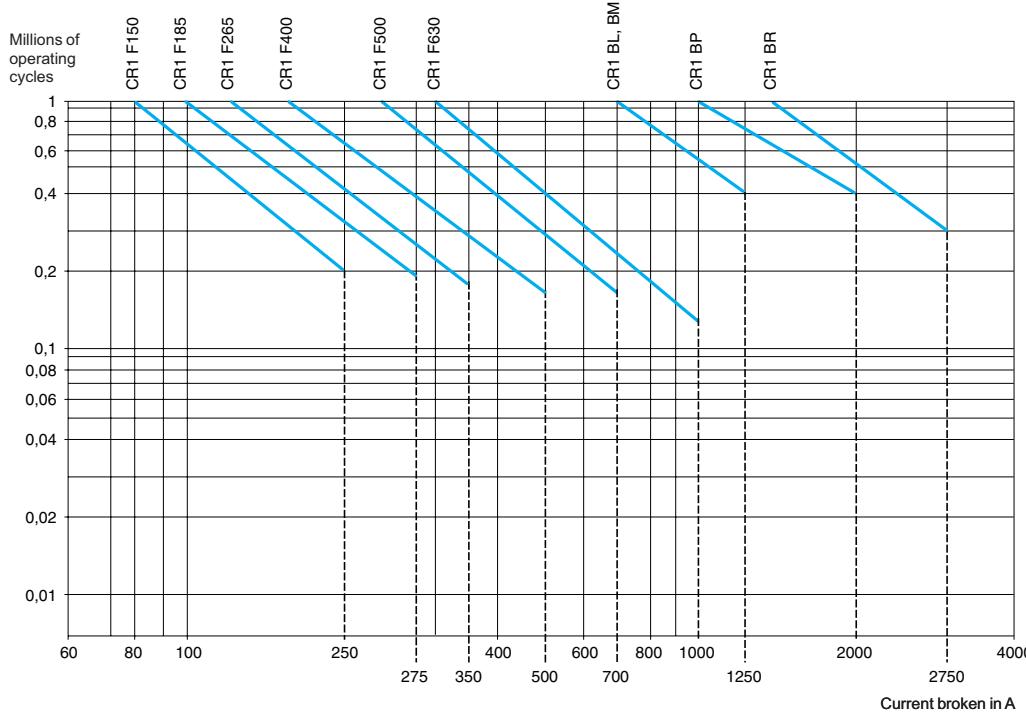

Example:

Ue = 220 V - Ie = 200 A - q = 40 °C - Ic = Ie = 200 A

600 000 operating cycles required.

The above selection curves show the contactor rating needed, CR1 F400.

(1) For 660 V, multiply the number of operating cycles by 0.8.

Characteristics :
pages 5/246 to 5/249

References :
pages 5/250 to 5/259

Dimensions :
pages 5/260 to 5/264

Schemes :
pages 5/266 and 5/267

Selection

TeSys contactors

Magnetic latching contactors

Selection guide for switching the primaries
of 3-phase transformers

Operating conditions

Maximum ambient temperature: 55 °C

Maximum operational voltage: 1000 V, 50...60 Hz

When a transformer is switched on, there is generally an initial current surge which reaches its peak value almost instantaneously and then decreases in a largely exponential manner to quickly reach its steady state value.

The value of this current depends on:

- the characteristics of the magnetic circuit and of the windings (cross sectional area of the core, rated inductance, number of turns, size of the windings, ...)
- the performance of the magnetic laminations used (residual induction and saturation inductance),
- the magnetic state of the circuit and the instantaneous value of the a.c. mains voltage at the moment of switch-on.

The peak current at the moment of switch-on can reach 20 to 40 times the rated current for the various kVA power ratings in the tables below. This value is independent of the "no-load" or "on-load" state of the transformer.

The peak magnetising current of the transformer must be lower than the values given in the tables below.

Contactor selection

Maximum operating rate: 120 operating cycles/hour

Contactor size		CR1 F150	CR1 F185	CR1 F265	CR1 F400	CR1 F500	CR1 F630	CR1 BL	CR1 BM	CR1 BP	CR1 BR
Maximum permissible current peak at switch-on	A	1700	2800	3500	5500	6800	9000	18 000	18 000	24 000	30 000
Maximum operational power (1)	220...230 V	kVA	25	40	50	75	100	140	230	230	300
	380...400 V	kVA	50	75	90	130	170	225	400	400	530
	415...440 V	kVA	55	80	100	140	190	250	450	450	560
	500 V	kVA	65	95	110	170	225	280	480	480	600
	660 V	kVA	80	120	140	200	270	315	600	600	800
	1000 V	kVA	100	150	200	250	375	470	700	700	1000

(1) Maximum operational power corresponding to a current peak at switch-on of 30 In.

5

Characteristics :
pages 5/246 to 5/249

References :
pages 5/250 to 5/259

Dimensions :
pages 5/260 to 5/264

Schemes :
pages 5/266 and 5/267

Schneider
Electric

5/245

Characteristics

TeSys contactors

Magnetic latching contactors

Contactor type		CR1 F150	CR1 F185	CR1 F265
Environment				
Rated insulation voltage (Ui)	Conforming to IEC 60158-1, BS 775, 60947-4	V	1000	1000
	Conforming to VDE 0110 grC	V	1500	1500
Protective treatment	Standard version		"TH"	
	Special version		-	
Ambient air temperature around the device	Storage	°C	- 60...+ 80	
	For operation at Uc	°C	- 15...+ 70	
Maximum operating altitude	Without derating	m	3000	
Operating positions	Without derating		± 5 °	
Pole characteristics				
Number of poles			3 or 4	3 or 4
Rated operational current (Ie) (Ue ≤ 440 V)	In AC-3, θ ≤ 40 °C In AC-1, θ ≤ 40 °C In AC-4, θ ≤ 40 °C	A	150 250 138	185 275 170
Rated operational voltage (Ue)	Up to	V	1000	1000
Frequency limits (sine wave)	Of the operational current	Hz	25...200	25...200
Rated making capacity	I rms	A	1700	2100
Rated breaking capacity	I rms	A	1500	1800
	500 V	A	1200	1600
	660/690 V	A	1100	1200
	1000 V	A	450	600
Permissible short time rating from cold state, with no current flowing for previous 60 minutes at θ ≤ 40 °C	For 1 s For 5 s For 10 s For 30 s For 1 min For 3 min For 10 min	A	1200 1200 1200 700 600 450 350	1500 1500 1500 920 740 500 400
Short-circuit protection by fuses θ ≤ 440 V	Motor circuit AC-3 (type aM) AC-1 circuit (type gG, BS 88)	A	160 250	200 315 315 400
Average impedance per pole	At Ith and 50 Hz	mΩ	0.45	0.36
Power dissipated per pole for the above operational currents	AC-3 AC-1	W	6 18	12 26
Connection				
	Number of conductors		1	1
	Cable with lugs	mm²	120	150
	Cable with connector	mm²	120	150
	Number of bars		2	2
	Bar c.s.a.	mm	25 x 3	25 x 3
	Bolt diameter		Ø 8	Ø 8
	Tightening torque	N.m	18	18
				35

5

Selection :
pages 5/241 to 5/245

References :
pages 5/250 to 5/259

Dimensions :
pages 5/260 to 5/264

Schemes :
pages 5/266 and 5/267

CR1 F400	CR1 F500	CR1 F630	CR1 BL	CR1 BM	CR1 BP	CR1 BR
1000	1000	1000	1000	1000	1000	1000
1500	1500	1500	1500	1500	1500	1500
"TH"			"TC"			
-			"TH"			
- 60...+ 80			- 60...+ 80			
- 15...+ 70			- 15...+ 60			
3000			3000			
± 5 ° in relation to normal vertical mounting plane			± 5 ° in relation to normal vertical mounting plane			
3 or 4	3 or 4	3 or 4	1, 2, 3 or 4	1, 2, 3 or 4	1, 2, 3 or 4	1, 2, 3 or 4
400	500	630	750	1000	1500	1800
500	700	1000	800	1250	2000	2750
370	460	560	700	800	1250	1500
1000	1000	1000	1000	1000	1000	1000
25...200	25...200	25...200	50...60	50...60	50...60	50...60
4500	5000	6740	10 000	10 000	15 000	18 000
4000	5000	6300	10 000	10 000	15 000	18 000
3500	4500	5400	9000	9000	12 000	15 000
3000	3560	4600	8000	8000	9000	11 000
1200	2500	3200	4000	4000	5000	6000
3600	4200	5050	9600	9600	12 000	15 000
3600	4200	5050	9600	9600	12 000	15 000
3600	4200	5050	7000	8000	9600	12 000
2400	3200	4400	4800	5200	6400	8000
1700	2400	3400	3500	3800	5200	6300
1200	1500	2200	2100	2400	3600	4400
1000	1200	1600	1200	1800	2800	3600
400	500	630	800	1200	800 x 2 (1)	1000 x 2 (1)
500	800	1000	800	1200	1000 x 2 (1)	1200 x 2 (1)
0.28	0.18	0.12	0.18	0.18	0.13	0.09
45	45	48	88	180	290	360
70	88	120	115	280	520	680
2	2	-	-	-	-	-
150	240	-	-	-	-	-
-	-	-	-	-	-	-
2	2	2	2	2	3	4
30 x 5	40 x 5	60 x 5	50 x 5	80 x 5	100 x 5	100 x 10
Ø 10	Ø 10	Ø 12	4 x Ø 8	4 x Ø 10	4 x Ø 10	4 x Ø 10
35	35	58	21	35	35	35

(1) Paralleling of poles must be carried out only in accordance with the fuse manufacturer's recommendations.

Selection :
 pages 5/241 to 5/245

References :
 pages 5/250 to 5/259

Dimensions :
 pages 5/260 to 5/264

Schemes :
 pages 5/266 and 5/267

Schneider
 Electric

5/247

Characteristics

TeSys contactors

Magnetic latching contactors

Contactor type		CR1 F150	CR1 F185	CR1 F265
Control circuit characteristics				
Rated control circuit voltage (Uc)	~ 50 or 60 Hz	V	48...415	
	~ 400 Hz	V	48...220	
	---	V	48...220	
	--- low consumption	V	48...220	
Control voltage limits	Latching		0.85...1.1 Uc	
~ and ---	Unlatching		0.85...1.1 Uc	
Maximum operating rate at ambient temperature ≤ 40 °C	In operating cycles per hour		120	
Mechanical durability	In millions of operating cycles		1	
Average consumption	Latching	1-pole	VA	—
50/60 Hz		2-pole	VA	—
		3-pole	VA	1100
		4-pole	VA	100
	Unlatching	1-pole	VA	—
		2-pole	VA	—
		3-pole	VA	7.3
		4-pole	VA	7.3
400 Hz and ---	Latching	1-pole	VA	—
		2-pole	VA	—
		3-pole	VA	1260
		4-pole	VA	1260
	Unlatching	1-pole	VA	—
		2-pole	VA	—
		3-pole	VA	10
		4-pole	VA	10
--- low consumption	Latching	3/4-pole	W	500
	Unlatching	3/4-pole	W	15
Average operating time at Uc (1)	Latching		ms	35...40
	Unlatching		ms	50...100
				35...40
				45...50
				50...100

(1) The closing time is measured from the moment the closing coil is energised to initial contact of the main poles. The opening time is measured from the moment the opening coil is energised to the moment the main poles separate.

Note : the arcing time depends on the circuit switched by the main poles. For 3-phase applications the arcing time is usually less than 10 ms. The load is isolated from the supply after a time equal to the sum of the opening time and the arcing time.

Auxiliary contact characteristics

Type of contacts		LAD N for contactors CR1 F					
Conventional thermal current	A	10					
Rated insulation voltage (Ui)	Conforming to IEC 60947-5-1	V	690				
Connection	Flexible or solid conductor with or without cable end	mm ²	1 x 1 min; 2 x 2.5 max				
Operational power of contacts LAD N for contactors CR1 F		a.c. supply Electrical durability (valid for up to 3600 operating cycles/hour) on an inductive load such as the coil of an electromagnet: making current ($\cos \phi 0.7$) = 10 times the power broken ($\cos \phi 0.4$).					
		V	48	115	230	400	600
1 million operating cycles		VA	120	280	560	960	1440
Occasional making capacity		VA	2600	7000	13 000	15 000	9000
			d.c. supply Electrical durability (valid for up to 1200 operating cycles/hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the load.				
		V	48	125	250	440	
		W	90	75	68	61	
		W	700	400	260	220	

CR1 F400	CR1 F500	CR1 F630	CR1 BL	CR1 BM	CR1 BP	CR1 BR
48...415			110...500			
48...220			110...500			
48...220			110...500			
48...220			—			
0.85...1.1 Uc			0.85...1.1 Uc			
0.85...1.1 Uc			0.85...1.1 Uc			
120			120			
1			1			
—	—	—	650	650	650	650
—	—	—	1100	1100	1100	1100
1450	1650	2100	1650	1650	1650	1650
1450	1650	2100	1850	1850	1850	1850
—	—	—	110	110	110	110
—	—	—	125	125	125	125
12	9.5	8	165	165	165	165
12	9.5	8	175	175	175	175
—	—	—	600	600	600	600
—	—	—	1000	1000	1000	1000
1600	1800	2300	1500	1500	1500	1500
1600	1800	2300	1700	1700	1700	1700
—	—	—	100	100	100	100
—	—	—	115	115	115	115
16	13	11	150	150	150	150
16	13	11	160	160	160	160
500	550	620	—	—	—	—
70	60	45	—	—	—	—
40...75	40...80	40...80	100...150	100...150	100...150	100...150
50...100	50...100	50...100	20...40	20...40	20...40	20...40

(1) The closing time is measured from the moment the closing coil is energised to initial contact of the main poles. The opening time is measured from the moment the opening coil is energised to the moment the main poles separate.

Nota : the arcing time depends on the circuit switched by the main poles. For 3-phase applications the arcing time is usually less than 10 ms. The load is isolated from the supply after a time equal to the sum of the opening time and the arcing time.

LAD N for contactors CR1 F	ZC4 GM for contactors CR1 B																																	
10	20																																	
690	660																																	
1 x 1 min; 2 x 2.5 max	2 min; 4 max																																	
Operational power of contacts ZC4 GM for contactors CR1 B	a.c. supply Electrical durability (valid for up to 2400 operating cycles/hour) on an inductive load such as the coil of an electromagnet: making current ($\cos \phi 0.7$) = 10 times the power broken ($\cos \phi 0.4$). <table border="1"> <thead> <tr> <th>V</th> <th>110 127</th> <th>220</th> <th>380</th> <th>415 440</th> <th>500</th> </tr> </thead> <tbody> <tr> <td>VA</td> <td>2000</td> <td>4000</td> <td>4000</td> <td>4000</td> <td>3500</td> </tr> <tr> <td>VA</td> <td>14 000</td> <td>23 000</td> <td>35 000</td> <td>45 000</td> <td>35 000</td> </tr> </tbody> </table> d.c. supply Electrical durability (valid for up to 1200 operating cycles/hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the load. <table border="1"> <thead> <tr> <th>V</th> <th>110</th> <th>120</th> <th>440</th> <th>500</th> </tr> </thead> <tbody> <tr> <td>W</td> <td>250</td> <td>250</td> <td>230</td> <td>200</td> </tr> <tr> <td>W</td> <td>1600</td> <td>800</td> <td>400</td> <td>360</td> </tr> </tbody> </table>	V	110 127	220	380	415 440	500	VA	2000	4000	4000	4000	3500	VA	14 000	23 000	35 000	45 000	35 000	V	110	120	440	500	W	250	250	230	200	W	1600	800	400	360
V	110 127	220	380	415 440	500																													
VA	2000	4000	4000	4000	3500																													
VA	14 000	23 000	35 000	45 000	35 000																													
V	110	120	440	500																														
W	250	250	230	200																														
W	1600	800	400	360																														
1 million operating cycles																																		
Occasional making capacity																																		

References

TeSys contactors

Magnetic latching contactors

Control circuit: a.c. or d.c. supply

Maximum thermal current in category AC-1 40 °C	Rated operational current in category AC-3 (440 V max)	Number of poles	Instantaneous auxiliary contacts	Basic reference, to be completed by adding the voltage code (1)	Weight
250	150	3	—	CR1 F150••	3.500
		4	—	CR1 F1504••	3.800
275	185	3	—	CR1 F185••	4.600
		4	—	CR1 F1854••	5.400
350	265	3	—	CR1 F265••	7.400
		4	—	CR1 F2654••	8.500
500	400	3	—	CR1 F400••	9.100
		4	—	CR1 F4004••	10.200
700	500	3	—	CR1 F500••	11.300
		4	—	CR1 F5004••	12.900
1000	630	3	—	CR1 F630••	18.600
		4	—	CR1 F6304••	21.500
800	750	1	1 2	CR1 BL31•12	32.000
		2	1	CR1 BL31•21	32.000
		3	—	CR1 BL31•30	32.000
		2	1 2	CR1 BL32•12	45.000
		2	1	CR1 BL32•21	45.000
		3	—	CR1 BL32•30	45.000
		3	1 2	CR1 BL33•12	58.000
		2	1	CR1 BL33•21	58.000
		3	—	CR1 BL33•30	58.000
		4	1 2	CR1 BL34•12	72.000
		2	1	CR1 BL34•21	72.000
		3	—	CR1 BL34•30	72.000
1250	1000	1	1 2	CR1 BM31•12	31.000
		2	1	CR1 BM31•21	31.000
		3	—	CR1 BM31•30	31.000
		2	1 2	CR1 BM32•12	44.000
		2	1	CR1 BM32•21	44.000
		3	—	CR1 BM32•30	44.000
		3	1 2	CR1 BM33•12	57.000
		2	1	CR1 BM33•21	57.000
		3	—	CR1 BM33•30	57.000
		4	1 2	CR1 BM34•12	71.000
		2	1	CR1 BM34•21	71.000
		3	—	CR1 BM34•30	71.000
2000	1500	1	1 2	CR1 BP31•12	41.000
		2	1	CR1 BP31•21	41.000
		3	—	CR1 BP31•30	41.000
		2	1 2	CR1 BP32•12	65.000
		2	1	CR1 BP32•21	65.000
		3	—	CR1 BP32•30	65.000
		3	1 2	CR1 BP33•12	94.000
		2	1	CR1 BP33•21	94.000
		3	—	CR1 BP33•30	94.000
		4	1 2	CR1 BP34•12	120.000
		2	1	CR1 BP34•21	120.000
		3	—	CR1 BP34•30	120.000
2750	1800	1	1 2	CR1 BR31•12	52.000
		2	1	CR1 BR31•21	52.000
		3	—	CR1 BR31•30	52.000
		2	1 2	CR1 BR32•12	85.000
		2	1	CR1 BR32•21	85.000
		3	—	CR1 BR32•30	85.000
		3	1 2	CR1 BR33•12	129.000
		2	1	CR1 BR33•21	129.000
		3	—	CR1 BR33•30	129.000
		4	1 2	CR1 BR34•12	160.000
		2	1	CR1 BR34•21	160.000
		3	—	CR1 BR34•30	160.000

(1) Standard control circuit voltages: see page opposite.

Selection :
pages 5/241 to 5/245

Characteristics :
pages 5/254 to 5/249

Dimensions :
Pages 5/260 to 5/264

Schemes :
pages 5/266 and 5/267

5/250


Schneider
Electric

References

TeSys contactors

Magnetic latching contactors

Accessories

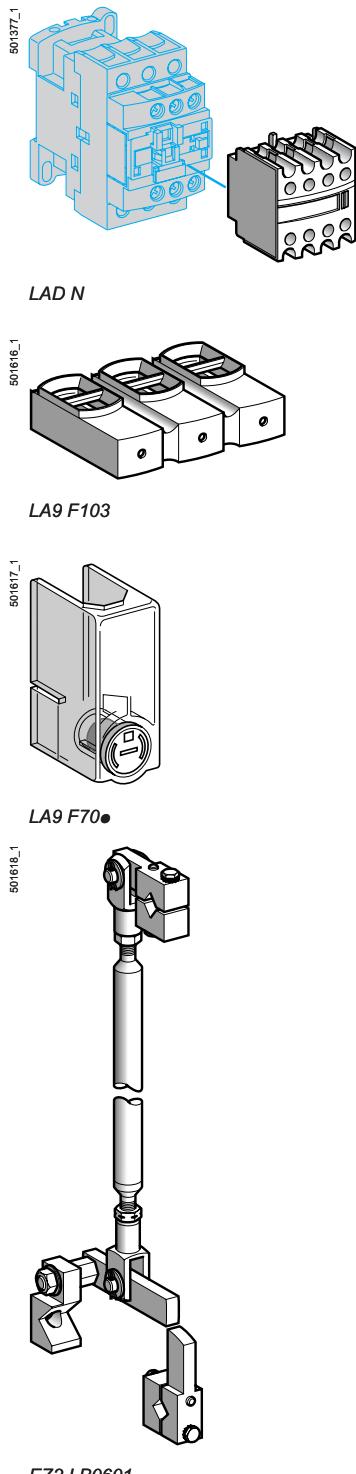

EZ2 LB0601

Accessories for contactors CR1 F

Description	Number of contacts or shrouds	For use on	Reference	Weight kg
Instantaneous auxiliary contacts	(1)	CR1 F	LAD N (1)	0.050
Time delay auxiliary contacts	(1)	CR1 F	LAD • (1)	0.060
Contact blocks with protected terminals for 3-pole contactors (for mounting on contactors with closed arc chamber)	Set of 2 blocks	CR1 F150 and CR1 F185	LA9 F103	0.300
Power terminal protection shrouds	Set of 6 shrouds for 3-pole contactors	CR1 F150 and CR1 F185	LA9 F702	0.250
		CR1 F265 to CR1 F500	LA9 F703	0.250
		CR1 F630	LA9 F704	0.250
	Set of 8 shrouds for 4-pole contactors	CR1 F1504 and CR1 F1854	LA9 F707	0.300
		CR1 F2654 to CR1 F5004	LA9 F708	0.300
		CR1 F6304	LA9 F709	0.300

Accessories for contactors CR1 B

Description	Application	Reference	Weight kg
Mechanical interlock and power connections	For assembly of reversing contactors and changeover contactor pairs	See pages 5/252 and 5/253	
Mechanical interlock with mounting accessories (3)	For vertical assembly of reversing contactors and changeover contactor pairs	EZ2 LB0601	1.560
Kit containing 2 bar mounting brackets	For mounting on 120 or 150 mm centres	LA9 B103	1.620

(1) For maximum number per contactor and complete reference, see page 5/123.

(2) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

Volts	48	110	125	127	220	230	240	250	380	400	415	440	500
For contactors CR1 F													
~ 50/60 Hz	E7	F7	—	G7	M7	M7	U7	—	Q7	Q7	N7	—	—
~ 400 Hz	E7	F7	—	G7	M7	M7	—	—	—	—	—	—	—
...	E7	F7	—	G7	M7	M7	—	—	—	—	—	—	—
... low consumption	EZ7	FZ7	—	GZ7	MZ7	—	—	—	—	—	—	—	—

For contactors CR1 B

~ 50...400 Hz	F	—	G	M	M	U	—	Q	V	N	R	S
—	—	FD	GD	—	MD	—	UD	UCD	—	—	RD	SD

(3) Positive mechanical interlocking between 2 vertically mounted contactors of identical or different ratings. Connecting rods and cranks assembled on right-hand sides, crank pins on the pole side.
Vertical fixing centre distance between the two contactors: 600 mm.

Mounting

TeSys contactors

Magnetic latching contactors

Components for assembling reversing contactors

and changeover contactor pairs CR1 F

Horizontally or vertically mounted


Horizontally mounted

Mechanical interlocks

Reversers assembled using 2 contactors of identical rating, type:


CR1 F150
CR1 F185
CR1 F265
CR1 F400
CR1 F500
CR1 F630

LA9 F•970




Sets of power connections

Reversing contactors LA9 F•976

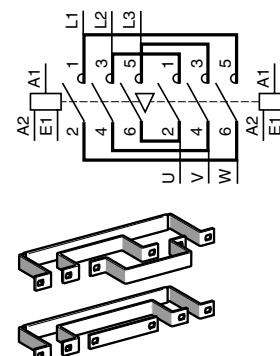

3 or 4-pole changeover contactor pairs LA9 F•977 or LA9 F•982

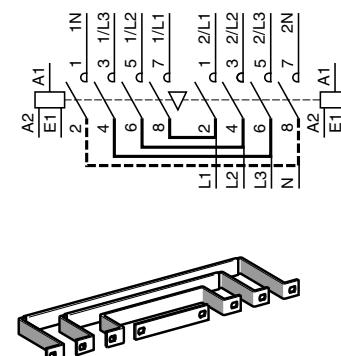


Vertically mounted

Mechanical interlocks


Reversers assembled using 2 contactors of identical rating, type:

CR1 F150
CR1 F185
CR1 F265
CR1 F400
CR1 F500
CR1 F630

LA9 FF4F Assembly A
LA9 FG4G




LA9 FH4H Assembly C
LA9 FJ4J
LA9 FK4K
LA9 FL4L




Reversers assembled using 2 contactors of different ratings, type:

CR1 F150
CR1 F185
CR1 F265
CR1 F400
CR1 F500
CR1 F630


LA9 FG4F Assembly A



LA9 FH4F Assembly B
LA9 FJ4F
LA9 FK4F
LA9 FL4F




LA9 FJ4H Assembly C
LA9 FK4H
LA9 FL4H
LA9 FK4J
LA9 FL4J
LA9 FK4K



Reversers assembled using 3 contactors of identical or different ratings

LA9 F•4•4•

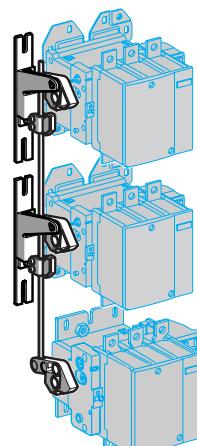

A → CR1 F500	F150			
	F185			
	F265			
	F400			
	F500			
	F630			
B → CR1 F265		F150 F185 F265 F400 F500 F630		
		F150		
		F185		
		F265		
		F400		
		F500		
		F630		
C → CR1 F185				X

Warning: the contactor ratings must be in decreasing size from top to bottom.

References

TeSys contactors

Magnetic latching contactors

Components for assembling reversing contactors
and changeover contactor pairs CR1 F

For assembly of 3-pole reversing contactors
for motor control (1)

Contactor type	Set of power connections		Mechanical interlock		
	3-pole Reference	4-pole Reference	Weight kg	Kit reference	Weight kg
Horizontally mounted					
CR1 F150	LA9 FF976	—	0.600	LA9 FF970	0.060
CR1 F185	LA9 FG976	—	0.780	LA9 FG970	0.060
CR1 F265	LA9 FH976	—	1.500	LA9 FJ970	0.140
CR1 F400	LA9 FJ976	—	2.100	LA9 FJ970	0.140
CR1 F500	LA9 FK976	—	2.350	LA9 FJ970	0.140
CR1 F630	LA9 FL976	—	3.800	LA9 FL970	0.150
Vertically mounted					
CR1 F150	(2)	—	—	LA9 FF4F	0.345
CR1 F185	(2)	—	—	LA9 FG4G	0.350
CR1 F265	(2)	—	—	LA9 FH4H	1.060
CR1 F400	(2)	—	—	LA9 FJ4J	1.200
CR1 F500	(2)	—	—	LA9 FK4K	1.200
CR1 F630	(2)	—	—	LA9 FL4L	1.220

For assembly of 4-pole changeover contactor pairs

Contactor type	Set of power connections			Mechanical interlock	
	3-pole Reference	4-pole Reference	Weight kg	Kit reference	Weight kg
Horizontally mounted					
CR1 F1504	LA9 FF982	LA9 FF977	0.460	LA9 FF970	0.060
CR1 F1854	LA9 FG982	LA9 FG977	0.610	LA9 FG970	0.060
CR1 F2654	LA9 FH982	LA9 FH977	1.200	LA9 FJ970	0.140
CR1 F4004	LA9 FJ982	LA9 FJ977	1.800	LA9 FJ970	0.140
CR1 F5004	LA9 FK982	LA9 FK977	2.300	LA9 FJ970	0.140
CR1 F6304	LA9 FL982	LA9 FL977	3.400	LA9 FL970	0.150
Vertically mounted					
CR1 F1504	(2)	—	—	LA9 FF4F	0.345
CR1 F1854	(2)	—	—	LA9 FG4G	0.350
CR1 F2654	(2)	—	—	LA9 FH4H	1.060
CR1 F4004	(2)	—	—	LA9 FJ4J	1.200
CR1 F5004	(2)	—	—	LA9 FK4K	1.200
CR1 F6304	(2)	—	—	LA9 FL4L	1.220

For assembly of 3 or 4-pole changeover contactor pairs

Contactor type	Set of power connections			Mechanical interlock	
	3-pole Reference	4-pole Reference	Weight kg	Kit reference	Weight kg
Vertically mounted (3)					
CR1 F150 or F1504	CR1 F185 or F1854	LA9 FG4F	0.350		
	CR1 F265 or F2654	LA9 FH4F	0.870		
	CR1 F400 or F4004	LA9 FJ4F	0.930		
	CR1 F500 or F5004	LA9 FK4F	0.940		
	CR1 F630 or F6304	LA9 FL4F	0.940		
CR1 F185 or F1854	CR1 F265 or F2654	LA9 FH4G	0.860		
	CR1 F400 or F4004	LA9 FJ4G	0.940		
	CR1 F500 or F5004	LA9 FK4G	0.940		
	CR1 F630 or F6304	LA9 FL4G	0.950		
CR1 F265 or F2654	CR1 F400 or F4004	LA9 FJ4H	1.130		
	CR1 F500 or F5004	LA9 FK4H	1.130		
	CR1 F630 or F6304	LA9 FL4H	1.140		
CR1 F400 or F4004	CR1 F500 or F5004	LA9 FK4J	1.200		
	CR1 F630 or F6304	LA9 FL4J	1.210		
CR1 F500 or F5004	CR1 F630 or F6304	LA9 FL4K	1.210		
Using 3 contactors (vertically mounted) of identical or different ratings					
Mechanical interlock					
Kit reference (4)					

For assembly of 3 or 4-pole reversing contactors

The contactor ratings must be in decreasing size from top to bottom.

- (1) A 3-pole reversing contactor for motor control can be converted into a 3-pole changeover contactor pair by removing the upper connecting links.
- (2) All power connections are to be made by the customer.
- (3) With identical or different number of poles. Power connections to be made by the customer.
- (4) Complete the reference by replacing the first dot with the code for the upper contactor, the second dot with the code for the middle contactor and the third dot with the code for the bottom contactor.

Contactors	CR1 F150	CR1 F185	CR1 F265	CR1 F400	CR1 F500	CR1 F630
Code	F	G	H	J	K	L

Example: mechanical interlock for reversing contactor made up of 3 different contactors:
CR1 F500 top, CR1 F26 middle and CR1 F185 bottom: **LA9 FK4H4G**.

Illustrations :
page 5/252

Dimensions :
page 5/260

Schemes :
pages 5/266 and 5/267


Schneider
Electric

5/253


References

TeSys contactors

Magnetic latching contactors
Coils for contactors CR1 F



LX0 FF009



LX0 FH009


5

Standard coils

Usual voltages		Resistance of winding at $\theta = 20^\circ\text{C}$		Reference	Voltage code	Weight
50...400 Hz	50 Hz, 60 Hz or \equiv	Latching	Unlatching			kg
For contactors CR1 F150						
48	—	1.98	230.8	LX0 FF005	E7	0.440
110	—	9.35	1453	LX0 FF006	F7	0.440
127	—	11.61	1788	LX0 FF007	G7	0.440
208	—	23.50	4098	LX0 FF020	L7	0.440
220/230	—	37.55	5139	LX0 FF008	M7	0.440
—	240	45.16	6544	LX0 FF009	U7	0.440
—	380/400	114.10	12 447	LX0 FF010	Q7	0.440
—	415	139.50	16 717	LX0 FF011	N7	0.440
For contactors CR1 F185						
48	—	1.42	220	LX0 FG005	E7	0.560
110	—	6.92	1339	LX0 FG006	F7	0.560
127	—	8.45	1676	LX0 FG007	G7	0.560
208	—	21.30	3169	LX0 FG020	L7	0.560
220/230	—	26.27	4729	LX0 FG008	M7	0.560
—	240	32.95	4729	LX0 FG009	U7	0.560
—	380/400	82.29	11 885	LX0 FG010	Q7	0.560
—	415	102.30	14 305	LX0 FG011	N7	0.560
For contactors CR1 F265						
48	—	1.34	183.4	LX0 FH005	E7	0.780
110	—	6.90	1031	LX0 FH006	F7	0.780
127	—	8.56	1325	LX0 FH007	G7	0.780
208	—	20.20	2654	LX0 FH020	L7	0.780
220/230	—	25.77	4090	LX0 FH008	M7	0.780
—	240	33.03	5002	LX0 FH009	U7	0.780
—	380/400	78.39	11 803	LX0 FH010	Q7	0.780
—	415	102.9	15 006	LX0 FH011	N7	0.780
For contactors CR1 F400						
48	—	1.32	90.5	LX0 FJ005	E7	1.120
110	—	8.09	813	LX0 FJ006	F7	1.120
127	—	9.79	1027	LX0-FJ007	G7	1.120
208	—	24.40	2643	LX0 FJ020	L7	1.120
220/230	—	30.14	3309	LX0 FJ008	M7	1.120
—	240	37.02	4074	LX0 FJ009	U7	1.120
—	380/400	94.80	9380	LX0 FJ010	Q7	1.120
—	415	121.10	11 763	LX0 FJ011	N7	1.120
For contactors CR1 F500						
48	—	1.57	166	LX0 FK005	E7	1.220
110	—	7.53	916	LX0 FK006	F7	1.220
127	—	9.56	1159	LX0 FK007	G7	1.220
208	—	23.60	2981	LX0 FK020	L7	1.220
220/230	—	28.81	3733	LX0 FK008	M7	1.220
—	240	35.67	4595	LX0 FK009	U7	1.220
—	380/400	89.56	10 570	LX0 FK010	Q7	1.220
—	415	112.06	13 256	LX0 FK011	N7	1.220
For contactors CR1 F630						
48	—	0.87	204	LX0 FL005	E7	1.460
110	—	5.20	1423	LX0 FL006	F7	1.460
127	—	6.45	1830	LX0 FL007	G7	1.460
208	—	20.20	2961	LX0 FL020	L7	1.460
220/230	—	25.36	4603	LX0 FL008	M7	1.460
—	240	25.36	5658	LX0 FL009	U7	1.460
—	380/400	60.95	10 676	LX0 FL010	Q7	1.460
—	415	77.97	13 003	LX0 FL011	N7	1.460

References (continued)

TeSys contactors
Magnetic latching contactors
Coils for contactors CR1 F

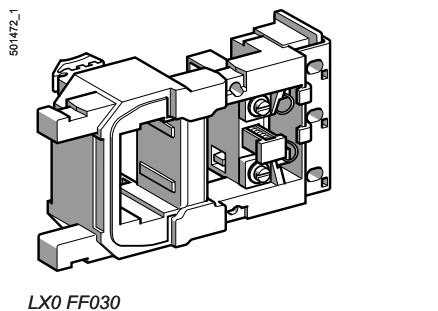

LX0 FF030

501472.1

5

Special coils

Coils with two windings with common point, allowing the use of two separate power sources for latching and unlatching.

Coil voltages at 50 Hz, 60 Hz, 400 Hz or ...		Resistance of winding at $\theta = 20^\circ\text{C}$		Reference	Voltage code	Weight
Latching V	Unlatching V	Latching Ω	Unlatching Ω			kg
For contactors CR1 F150						
220	24	29.5	39.5	LX0 FF224	MB7	0.440
For contactors CR1 F185						
220	24	26.5	19	LX0 FG224	MB7	0.560
For contactors CR1 F265						
220	24	26	29.5	LX0 FH224	MB7	0.780
For contactors CR1 F400						
220	24	30	23	LX0 FJ224	MB7	1.120
For contactors CR1 F500						
220	24	29	26	LX0 FK224	MB7	1.220
For contactors CR1 F630						
220	24	26	41	LX0 FL224	MB7	1.460


Coils with low inrush consumption

Usual voltages ---		Resistance of winding at $\theta = 20^\circ\text{C}$		Reference	Voltage code	Weight
Latching V	Unlatching Ω	Latching Ω	Unlatching Ω			kg
For contactors CR1 F150						
48	4.56	140.56	140.56	LX0 FF055	EZ7	0.440
110	22.37	706.44	706.44	LX0 FF056	FZ7	0.440
127	35.54	1086.36	1086.36	LX0 FF057	GZ7	0.440
220	89.85	3342.51	3342.51	LX0 FF058	MZ7	0.440
For contactors CR1 F185						
48	5.19	106.54	106.54	LX0 FG055	EZ7	0.570
110	25.50	536.26	536.26	LX0 FG056	FZ7	0.570
127	32.75	732.64	732.64	LX0 FG057	GZ7	0.570
220	102.44	2378.62	2378.62	LX0 FG058	MZ7	0.570
For contactors CR1 F265						
48	5.19	74.26	74.26	LX0 FH055	EZ7	0.800
110	25	364.61	364.61	LX0 FH056	FZ7	0.800
127	30.98	458.45	458.45	LX0 FH057	GZ7	0.800
220	97.89	1344.46	1344.46	LX0 FH058	MZ7	0.800
For contactors CR1 F400						
48	5.05	36.36	36.36	LX0 FJ055	EZ7	1.150
110	25.39	171.49	171.49	LX0 FJ056	FZ7	1.150
127	31.86	221.20	221.20	LX0 FJ057	GZ7	1.150
220	98.19	648.79	648.79	LX0 FJ058	MZ7	1.150
For contactors CR1 F500						
48	4.42	41	41	LX0 FK055	EZ7	1.270
110	22.74	193.36	193.36	LX0 FK056	FZ7	1.270
127	28.25	313.60	313.60	LX0 FK057	GZ7	1.270
220	85.12	918.68	918.68	LX0 FK058	MZ7	1.270
For contactors CR1 F630						
48	3.94	59.17	59.17	LX0 FL055	EZ7	1.500
110	19.36	365.33	365.33	LX0 FL056	FZ7	1.500
127	25.39	452.27	452.27	LX0 FL057	GZ7	1.500
220	74.44	1071.43	1071.43	LX0 FL058	MZ7	1.500

References

TeSys contactors

Magnetic latching contactors
Coils for contactors CR1 B



WB1 KB***

5

Coils with "TC" treatment (associated accessories, see page opposite)				
Usual voltages		Resistance at $\theta = 20^\circ\text{C}$	Reference	Weight
...	\sim 50...400 Hz	Ω		kg
For contactors CR1 B•31				
–	110...120	19.7	WB1 KB140	1.120
110...125	–	25.2	WB1 KB134	1.120
–	220...240	77.2	WB1 KB136	1.120
220	–	94	WB1 KB139	1.120
250	–	128	WB1 KB125	1.120
–	380...400	197	WB1 KB126	1.120
–	415...440	257	WB1 KB138	1.120
For contactors CR1 B•32				
–	110	9.6	WB1 KB133	1.120
110	120...127	11.4	WB1 KB121	1.120
125	–	19.7	WB1 KB140	1.120
–	220/230	32.5	WB1 KB124	1.120
220	240	49.7	WB1 KB122	1.120
250	–	77.2	WB1 KB136	1.120
–	380...400	128	WB1 KB125	1.120
–	415...440	160	WB1 KB137	1.120
For contactors CR1 B•33				
–	110	7.2	WB1 KB123	1.120
110	120...127	9.6	WB1 KB133	1.120
125	–	11.4	WB1 KB121	1.120
220	240	32.5	WB1 KB124	1.120
250	–	61	WB1 KB135	1.120
–	380...415	94	WB1 KB139	1.120
–	440	128	WB1 KB125	1.120
For contactors CR1 B•34				
–	110	5.8	WB1 KB132	1.120
110	120...127	7.2	WB1 KB123	1.120
125	–	11.4	WB1 KB121	1.120
–	220/230	25.2	WB1 KB134	1.120
–	240	32.5	WB1 KB124	1.120
250	–	49.7	WB1 KB122	1.120
–	380	77.2	WB1 KB136	1.120
–	400...440	94	WB1 KB139	1.120

Coils with "TH" treatment (associated accessories, see page opposite)

Add suffix TH to the references selected above. Example: WB1 KB140TH.

References (continued)

TeSys contactors

Magnetic latching contactors
Coils for contactors CR1 B


Accessories for use with coils (1)						
Coils ("TC" or "TH")	Additional resistors (2)				Automatic coil cut-out contact (3)	Rectifier (4)
	R1	Reference	R2	Reference	Nb	Reference
For contactors CR1 B•31						
WB1 KB140	68	DR2 SC0068	47	DR2 SC0047	2	ZC4 GM2 or ZC4 GM8
WB1 KB134	68	DR2 SC0068	68	DR2 SC0068	2	ZC4 GM2 or ZC4 GM8
WB1 KB136	220	DR2 SC0220	180	DR2 SC0180	2	ZC4 GM2 or ZC4 GM8
WB1 KB139	270	DR2 SC0270	220	DR2 SC0220	2	ZC4 GM2 or ZC4 GM8
WB1 KB125	330	DR2 SC0330	270	DR2 SC0270	3	ZC4 GM2 or ZC4 GM8
WB1 KB126	470	DR2 SC0470	470	DR2 SC0470	3	ZC4 GM2 or ZC4 GM8
WB1 KB138	1000	DR2 SC1000	470	DR2 SC0470	3	ZC4 GM2 or ZC4 GM8
For contactors CR1 B•32						
WB1 KB133	10	DR2 SC0010	33	DR2 SC0033	1	PR4 FB0011
WB1 KB121	47	DR2 SC0047	39	DR2 SC0039	1	PR4 FB0010
WB1 KB140	100	DR2 SC0100	47	DR2 SC0047	1	PR4 FB0009
WB1 KB124	120	DR2 SC0120	120	DR2 SC0120	1	PR4 FB0007
WB1 KB122	220	DR2 SC0220	150	DR2 SC0150	1	PR4 FB0007
WB1 KB136	330	DR2 SC0330	220	DR2 SC0220	1	PR4 FB0006
WB1 KB125	470	DR2 SC0470	470	DR2 SC0470	1	PR4 FB0005
WB1 KB137	680	DR2 SC0680	560	DR2 SC0560	1	PR4 FB0004
For contactors CR1 B•33						
WB1 KB123	39	DR2 SC0039	27	DR2 SC0027	1	PR4 FB0012
WB1 KB133	47	DR2 SC0047	39	DR2 SC0039	1	PR4 FB0011
WB1 KB121	56	DR2 SC0056	47	DR2 SC0047	1	PR4 FB0010
WB1 KB124	180	DR2 SC0180	120	DR2 SC0120	1	PR4 FB0008
WB1 KB135	270	DR2 SC0270	270	DR2 SC0270	1	PR4 FB0006
WB1 KB139	470	DR2 SC0470	390	DR2 SC0390	1	PR4 FB0005
WB1 KB125	680	DR2 SC0680	470	DR2 SC0470	1	PR4 FB0004
For contactors CR1 B•34						
WB1 KB132	33	DR2 SC0033	27	DR2 SC0027	1	PR4 FB0014
WB1 KB123	47	DR2 SC0047	33	DR2 SC0033	1	PR4 FB0012
WB1 KB121	56	DR2 SC0056	56	DR2 SC0056	1	PR4 FB0010
WB1 KB134	150	DR2 SC0150	120	DR2 SC0120	1	PR4 FB0008
WB1 KB124	180	DR2 SC0180	150	DR2 SC0150	1	PR4 FB0007
WB1 KB122	270	DR2 SC0270	220	DR2 SC0220	1	PR4 FB0007
WB1 KB136	390	DR2 SC0390	390	DR2 SC0390	1	PR4 FB0006
WB1 KB139	560	DR2 SC0560	470	DR2 SC0470	1	PR4 FB0005

(1) For connections, see page 5/267.


(2) Weight of resistors DR2 SC•••• : 0.030 kg.

(3) Weight of automatic coil cut-out contacts: ZC4 GM• : 0.030 kg and PR4 FB00•• : 0.600 kg.


(4) Weight of rectifier DR5 TE1• : 0.100 kg. The rectifier is for use on a.c. only.




DR2 SC0220



ZC4 GM2

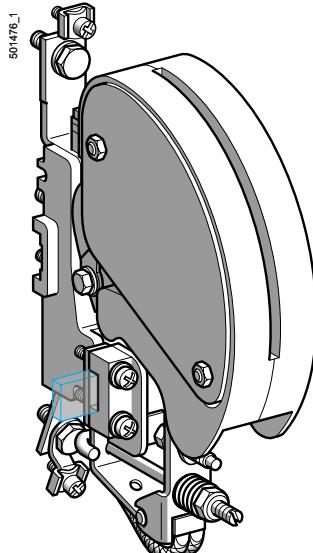

PR4 FB0014




DR5 TE1U

References


TeSys contactors

Magnetic latching contactors

Accessories and replacement parts for contactors CR1 F



LA5 FG431

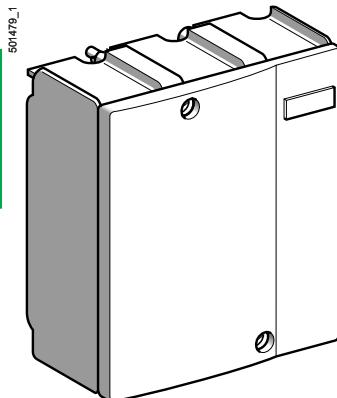

LA5 F40050

References			
Description	For contactor	Reference	Weight kg
Complete sets of contacts for 3 or 4 poles (1)	3-pole	CR1 F150	LA5 FF431
		CR1 F185	LA5 FG431
		CR1 F265	LA5 FH431
		CR1 F400	LA5 F400803
		CR1 F500	LA5 F500803
		CR1 F630	LA5 F630803
Arc chambers	4-pole	CR1 F1504	LA5 FF441
		CR1 F1854	LA5 FG441
		CR1 F2654	LA5 FH441
		CR1 F4004	LA5 F400804
		CR1 F5004	LA5 F500804
		CR1 F6304	LA5 F630804
Arc chambers	3-pole	CR1 F150	LA5 F15050
		CR1 F185	LA5 F18550
		CR1 F265	LA5 F26550
		CR1 F400	LA5 F40050
		CR1 F500	LA5 F50050
		CR1 F630	LA5 F63050
	4-pole	CR1 F1504	LA5 F150450
		CR1 F1854	LA5 F185450
		CR1 F2654	LA5 F265450
		CR1 F4004	LA5 F400450
		CR1 F5004	LA5 F500450
		CR1 F6304	LA5 F630450


(1) Set containing the following (per pole): 2 fixed contacts, 1 moving contact, 2 deflectors, 1 back-plate, clamping screws and washers.

References (continued)


TeSys contactors

Magnetic latching contactors


Accessories and replacement parts for contactors CR1 B




PA1 LB80
(PA1 LB76 + PA1 LB75)




ZC4 GM1



PA1 LB89

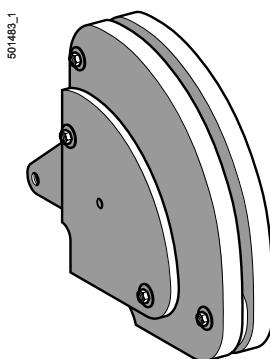

PA1 LB50

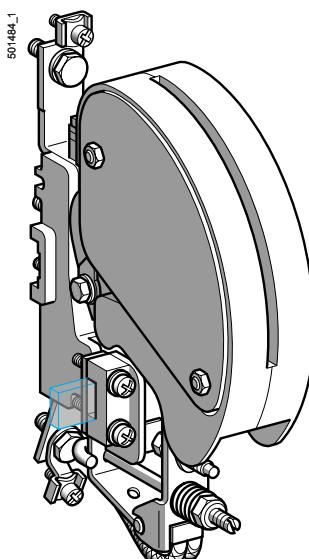

PR4 FB004••

References (continued)

Description	For contactors	Number of sets required per pole	Unit reference of set	Weight kg
Sets of contacts (1 moving contact, 1 fixed contact)	CR1 BL	1	PA1 LB80	0.420
	CR1 BM	1	PA1 LB80	0.420
	CR1 BP	2	PA1 LB80	0.420
	CR1 BR	3	PA1 LB80	0.420
Description	For contactors	Composition	Reference	Weight kg
Moving contact only (for one finger)	All ratings	—	PA1 LB75	0.220
Fixed contact only (for one finger)	All ratings	—	PA1 LB76	0.200
Blow-out horn only (for 1 finger)	All ratings	—	PA1 LB89	0.120
Arc chambers (for a single pole)	CR1 BL	—	PA1 LB50	3.700
	CR1 BM	—	PA1 LB50	3.700
	CR1 BP	—	PA1 PB50	6.200
	CR1 BR	—	PA1 RB50	8.500
Auxiliary contact blocks	All ratings	1 N/O contact - normal	ZC4 GM1	0.030
	All ratings	1 N/C contact - normal	ZC4 GM2	0.030
	All ratings	1 N/O contact - gold flashed	ZC4 GM9	0.030
	All ratings	1 N/C contact - gold flashed	ZC4 GM8	0.030
N/C pole for automatic cut-out coil	All ratings	—	PR4 FB00•• (1)	0.600
Set of moving and fixed contacts for N/C pole	All ratings	—	PV1 FA80	0.035
Arc chamber for N/C pole	All ratings	—	PN1 FB50	0.220
Electromagnet	All ratings	—	ET1 KB50	10.600
Description	For contactors	No. of parts required	Reference	Weight kg
Return springs for moving part of electromagnet	CR1 B (1 pole)	1	DV1 RT292	0.050
	CR1 B (2, 3 or 4 poles)	2	DV1 RT292	0.050
N/O pole springs	CR1 BL, BM or BP	1 per pole	DV1 RC201	0.020
	CR1 BR	1 per pole	DV1 RC155	0.020

(1) Reference to be completed, see page 5/257.


Dimensions

TeSys contactors

Magnetic latching contactors CR1 F

CR1 F150 to F500

Common side view

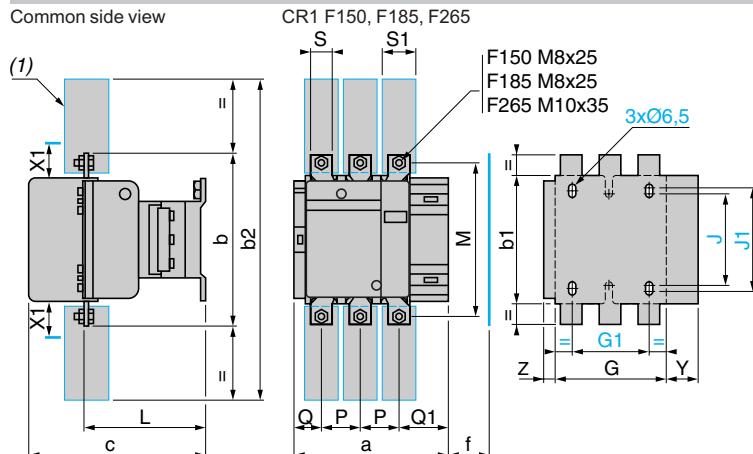

CR1	F150 3P	4P	F185 3P	4P	F265 3P	4P
a	163,5	201,5	168,5	208,5	201,5	244,5
b	170	170	174	174	203	203
b1	137	137	137	137	145	145
b2	301	301	305	305	370	370
c	171	171	181	181	213	213
f	131	131	130	130	147	147
G	106	143	111	151	142	190
G1	80	80	80	80	96	96
J	106	106	106	106	106	106
J1	120	120	120	120	120	120
L	107	107	113,5	113,5	141	141
M	150	150	154	154	178	178
P	40	40	40	40	48	48
Q	26	26	29	29	39	34
Q1	57,5	55,5	59,5	59,5	66,5	66,5
S	20	20	20	20	25	25
S1	27	27	34	34	38	38
Y	44	44	38,5	30,5	30,5	21,5
Z	13,5	13,5	13,5	13,5	15,5	15,5


f = minimum distance required for coil removal.

X1: Minimum electrical clearance according to operational voltage and breaking capacity.

Voltage in V	200...500	660...1000
CR1 F150	10	15
CR1 F185	10	15
CR1 F265	10	15

(1) Power terminal protection shroud.

CR1 F630

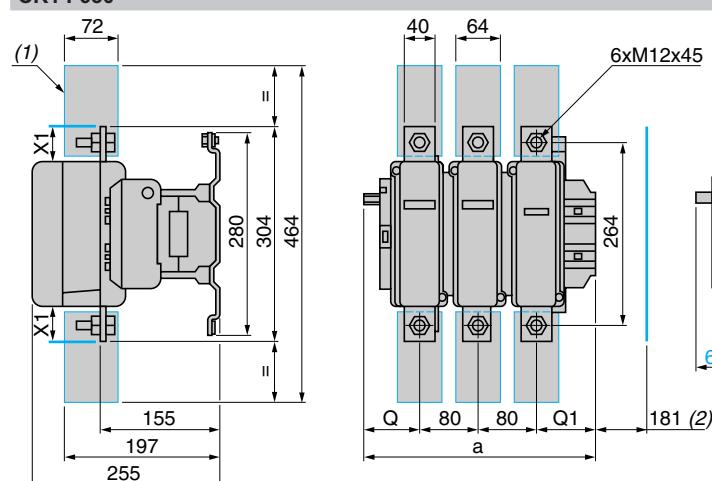

Selection :
pages 5/241 to 5/245

Characteristics :
pages 5/246 to 5/249

References :
pages 5/250 to 5/259

Schemes :
pages 5/266 and 5/267

5/260

Schneider
Electric


Mounting

TeSys contactors


Magnetic latching contactors CR1 F

CR1 F150...F265


Panel mounted

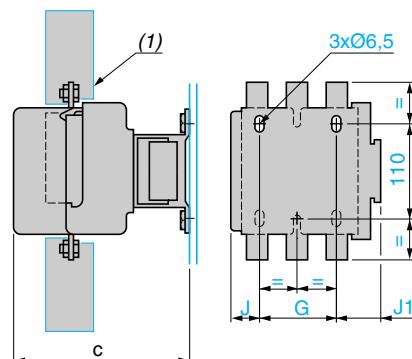

On pre-slotted mounting plate AM1 PA, PB, PC

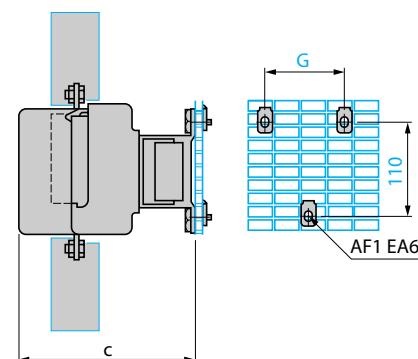

On rails DZ5 MB on 120 mm centres

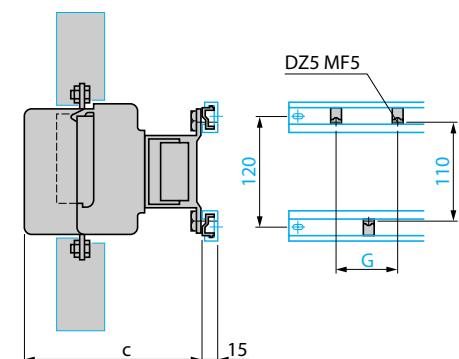

CR1	F150	F185	F265
c	3P 171	181	213
	4P 171	181	213
G	3P 80	80	96
	4P 80	80	96
J	3P 26.5	29	44.5
	4P 45	49	68.5
J1	3P 57	59.5	61.5
	4P 75.5	79.5	85.5



CR1	F150	F185	F265
c	3P 171	181	213
	4P 171	181	213
G	3P 80	80	96
	4P 80	80	96

CR1	F150	F185	F265
c	3P 171	181	213
	4P 171	181	213
G	3P 80	80	96
	4P 80	80	96

(1) Power terminal protection shroud.

CR1 F150...F650

On 2 notched uprights AM1 EC●●●

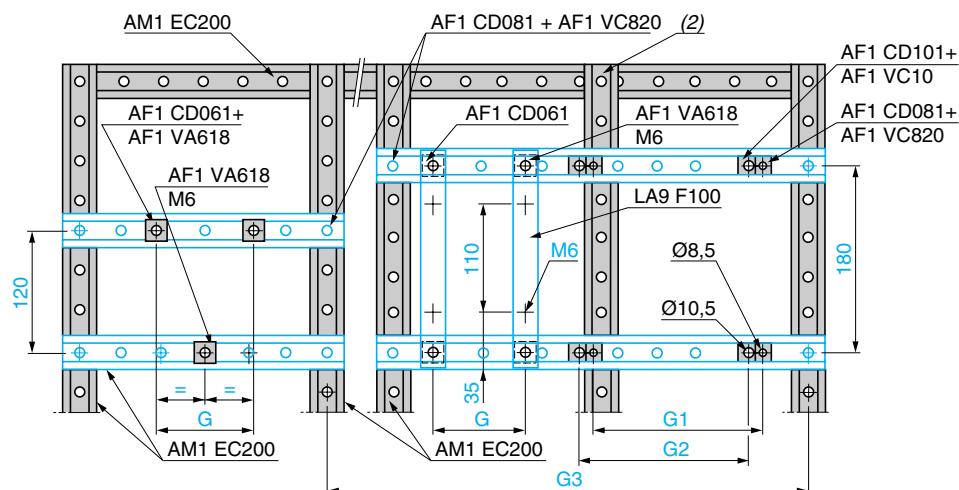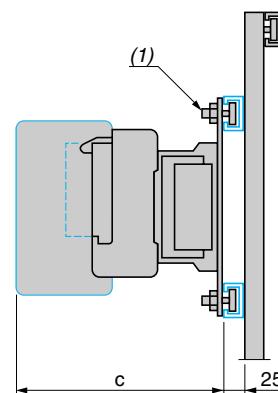

CR1	F150	F185	F265	F400	F500	F630
c	3P 171	181	213	213	226	250
	4P 171	181	213	213	226	250
G (M6)	3P 80	80	96	—	—	—
	4P 80	80	96	—	—	—
G1 (Ø 8.5)	3P —	—	—	80	80	—
	4P —	—	—	80	140	—
G2 (Ø 10.5)	3P —	—	—	—	—	180
	4P —	—	—	—	—	240

(1) AF1 CD●●● or AF1 VA●●●.


(2) This AM1 EC200 upright is required when G2 or G3 is greater than 700 mm (please consult your Regional Sales Office).

Mounting (continued)


TeSys contactors
Magnetic latching contactors CR1 F

Reversing contactors 2 x CR1 F150...F265

Horizontally mounted

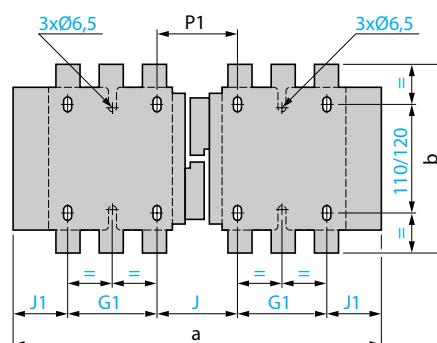

Reversing contactors 2 x CR1 F400...F630

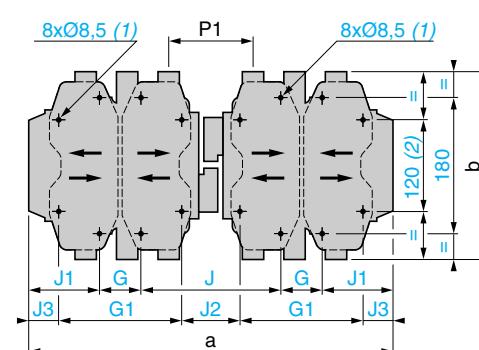

2 x CR1	F150	F185	F265
a	3P 4P	345 422	357 437
b	3P 4P	170 170	174 203
G1	3P 4P	80 80	96 96
J	3P 4P	71 111	78 118
J1	3P 4P	57 75.5	59.5 79.5
P1	3P 4P	71 71	78 100

2 x CR1	F400	F500	F630
a	3P 4P	446 542	485 595
b	3P 4P	206 206	238 304
G	3P 4P	80 80	180 240
G1	3P 4P	170 170	— —
J	3P 4P	157 157	156 139
J1	3P 4P	64.5 112.5	84.5 79.5
J2	3P 4P	67 67	66 —
J3	3P 4P	19.5 67.5	39.5 34.5
P1	3P 4P	107 107	112 112

(1) Except F630: 4 x Ø 10.5.

(2) Except F630: 180.

Mounting (continued)

TeSys contactors


Magnetic latching contactors CR1 F

Reversing contactors


Vertically mounted with mechanical interlock **LA9 F*****.

2 contactors CR1 F of identical or different ratings (CR1 F150...F630), see pages 5/252 and 5/253.


Assembly A

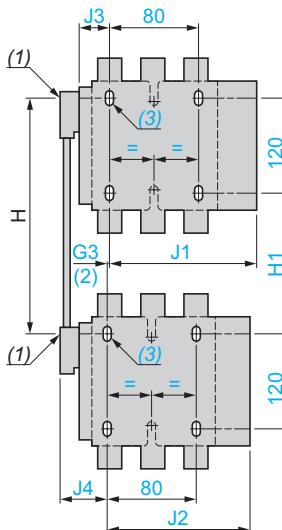

Assembly B

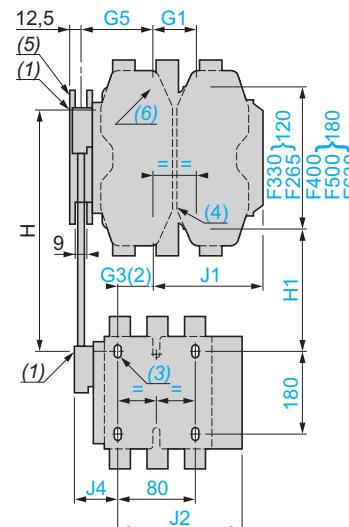

Assembly C

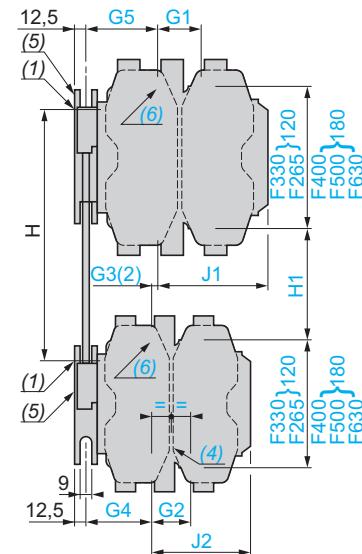

(1) Mechanical interlock shaft.

(2) For assembly of contactors of different ratings only.

(3) 3 x Ø 6.5 mm for CR1 F150...F265.

(4) 3 x Ø 6.5 mm for CR1 F265.

(5) Mechanical interlock guide bracket.

(6) 4 x Ø 8.5 mm for CR1 F400, F500 or 4 x Ø 10.5 mm.


Assembly type LA9 F	A			B								C										
	F4F	G4F	G4G	H4F	J4F	K4F	L4F	H4G	J4G	K4G	L4G	H4H	J4H	K4H	L4H	J4J	K4J	L4J	K4K	L4K	L4L	
G1	3P	—	—	96	80	80	180	96	80	80	180	96	80	80	180	80	80	180	80	180	180	
	4P	—	—	96	80	140	240	96	80	140	240	96	96	96	96	80	80	80	80	140	140	
G2	3P	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
	4P	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
G3	3P	0	3	0	21	45	45	35	19	42	42	33	0	23	23	14	0	0	9(7)	0	9(7)	0
	4P	0	4	0	27	26	26	17	23	22	22	13	0	0	0	9(7)	0	0	9(7)	0	9(7)	0
G4	3P	—	—	—	—	—	—	—	—	—	—	—	60	83	83	74	60	83	83	74	74	74
	4P	—	—	—	—	—	—	—	—	—	—	—	83	83	83	74	83	83	83	83	83	83
G5	3P	—	—	—	60	83	83	74	60	83	83	74	83	83	83	83	83	83	83	83	83	83
	4P	—	—	—	83	83	83	74	83	83	83	74	83	83	83	83	83	83	83	83	83	83
H	min.	200	210	220	240	250	270	310	250	250	270	310	380	380	380	380	380	380	380	380	380	380
	max.	310	300	310	380	380	380	380	380	380	380	380	130	110	130	170	60	100	140	120	160	200
H1	min.	80	90	100	110	80	100	140	120	90	110	150	250	210	210	210	250	220	220	220	195	200
	max.	190	180	190	250	210	210	210	250	220	220	220	60	60	60	60	83	83	83	83	83	83
J1	3P	133	134	134	149.5	137	157	241	149.5	137	157	241	133	134	134	134	134	134	134	134	134	134
	4P	145	146	146	164.5	185	212	321	164.5	185	212	321	145	146	146	146	146	146	146	146	146	146
J2	3P	133	133	134	183	133	183	133	134	134	134	134	145	145	145	145	146	146	146	146	146	146
	4P	145	145	146	145	145	145	145	146	146	146	146	145	145	145	145	146	146	146	146	146	146
J3	3P	48.5	53	53	—	—	—	—	—	—	—	—	67	73	73	—	—	—	—	—	—	—
	4P	67	73	73	—	—	—	—	—	—	—	—	67	69	73	73	73	73	73	73	73	73
J4	3P	48.5	54	53	48.5	48.5	48.5	48.5	53	53	53	53	48.5	48.5	48.5	48.5	53	53	53	53	53	53
	4P	67	69	73	67	67	67	67	73	73	73	73	67	67	67	67	73	73	73	73	73	73

(7) In this case, G4 is greater than G5.

Dimensions


TeSys contactors

Magnetic latching contactors CR1 B

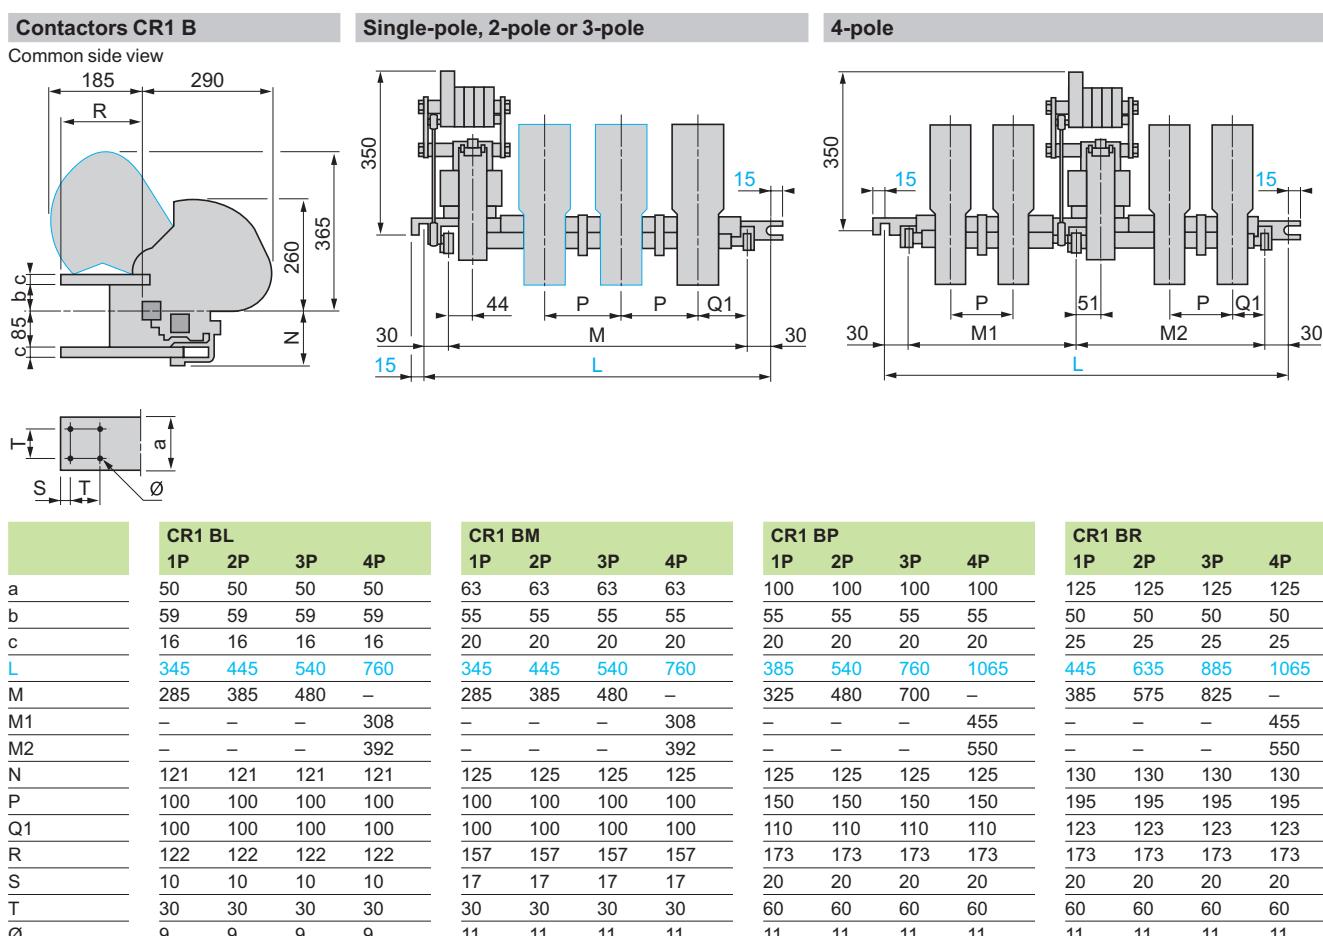


Minimum electrical clearance

Values X1 and X2 are given for a breaking capacity of 10 kA (3-phase Δ -current).



3-phase ~ voltage	CR1 BL	CR1 BM	CR1 BP	CR1 BR
380-415-440 V	X1	100	100	150
	X2	150	150	200
500 V	X1	100	100	150
	X2	150	150	220
600 V	X1	150	150	200
	X2	200	200	250
1000 V	X1	200	200	250
	X2	250	250	300

Mechanical interlock for assembly of vertically mounted reversing contactors
EZ2-LB0601

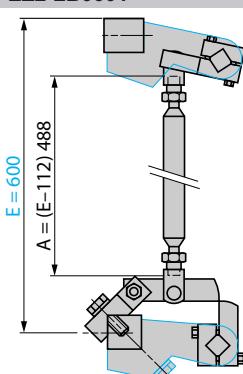

Selection :
pages 5/241 to 5/245

Characteristics :
pages 5/246 to 5/249

References :
pages 5/250 to 5/259

Schemes :
pages 5/266 and 5/267

5/264


Schneider
Electric

Adjustment characteristics

TeSys contactors


Magnetic latching contactors CR1 B

501391_1

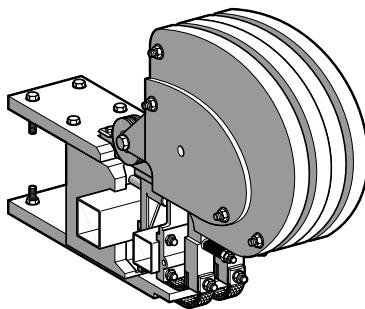


Complete pole

Adjustment of pick-up travel and pull-in travel



- 1 Moving circuit
- 2 Coil
- 3 Moving circuit
- 4 Return spring


N/O pole adjustment



- 1 Fixed contact
- 2 Moving contact
- 3 Pull-in gap adjustment
- 4 Adjustment of application force
- 5 Pole spring

5

N/C automatic coil cut-out pole adjustment

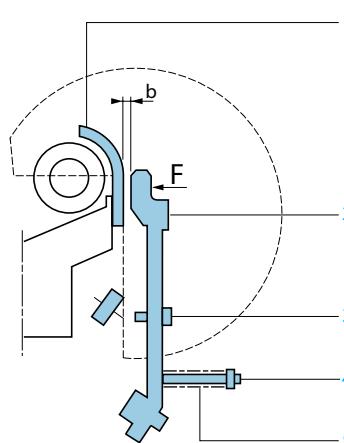

- 1 Fixed contact
- 2 Moving contact
- 3 Opening gap adjustment
- 4 Adjustment of application force
- 5 Pole spring

a.c. or d.c. supply with economy resistor (and rectifier on ~)

Contactor type		CR1 BL	CR1 BM	CR1 BP	CR1 BR
Electromagnet (EB5 KB50)	Pick-up travel (E) mm	30	30	30	30
	Pull-in travel (e) mm	10	10	10	10
Coil (WB1 KB)	Pull-in voltage V	0.75 Uc	0.75 Uc	0.75 Uc	-
	Drop-out voltage V	0.3...0.5 Uc	0.3...0.5 Uc	0.3...0.5 Uc	0.3...0.5 Uc
N/O power pole (PA1)	Application force (F) to contact per pole daN	30	30	30 (1)	30 (2)
N/C automatic coil cut-out pole (PR4)	Application force (F) daN	0.9	0.9	0.9	0.9
	Opening gap (b) with electromagnet closed mm	3.5 ± 0.5	3.5 ± 0.5	3.5 ± 0.5	3.5 ± 0.5

(1) Each pole has 2 contacts: the force must be applied evenly to each of these contacts.

(2) Each pole has 3 contacts: the force must be applied evenly to each of these contacts.

Selection :
pages 5/241 to 5/245

Characteristics :
pages 5/246 to 5/249

References :
pages 5/250 to 5/259

Schemes :
pages 5/266 and 5/267

Schneider
Electric

5/265

Schemes

TeSys contactors


Magnetic latching contactors CR1 F

Contactors CR1 F

3-pole


4-pole

Instantaneous auxiliary contacts (References : page 5/123)

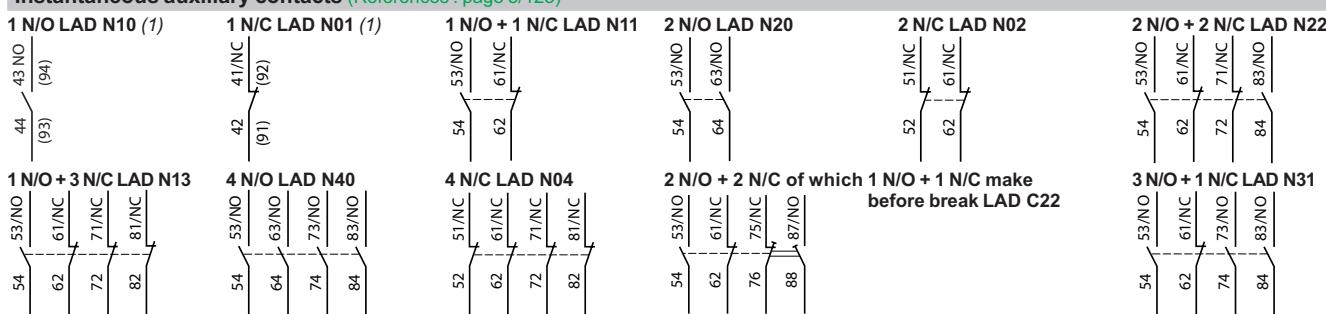


(1) Items in brackets refer to blocks mounted on right-hand side of contactor.

Instantaneous auxiliary contacts conforming to standard EN 50012 (References: page 5/123)

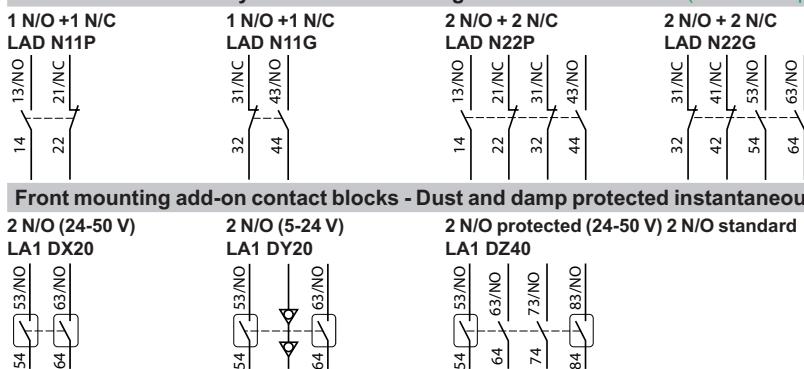


Front mounting add-on contact blocks - Dust and damp protected instantaneous auxiliary contacts (References : page 5/123)

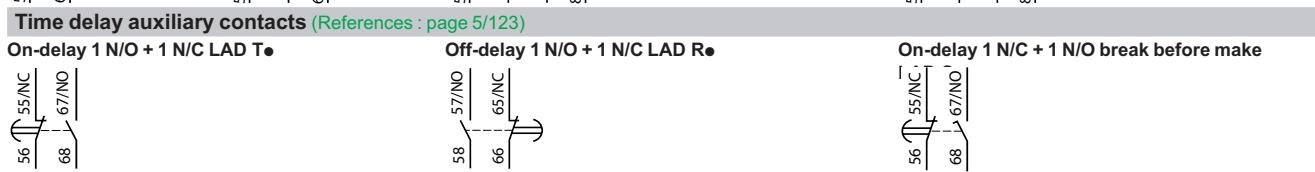


Time delay auxiliary contacts (References : page 5/123)





3-pole reversing contactors 2 x CR1 F150...F630

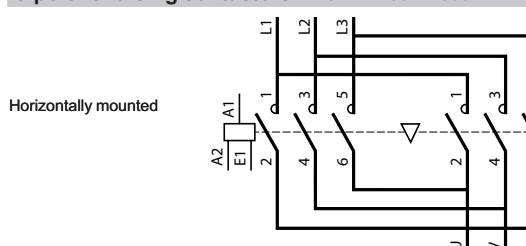

4-pole reversing contactors 2 x CR1 F1504...F6304

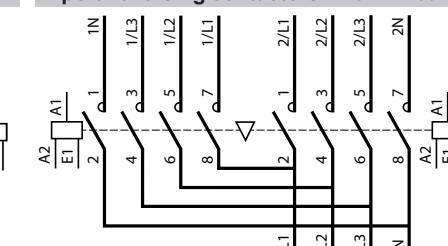

Vertically mounted contactors using 2 contactors of identical or different ratings

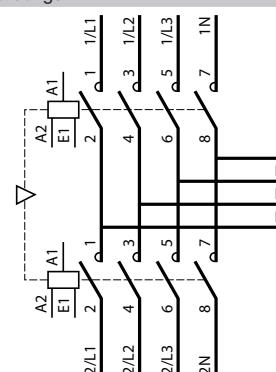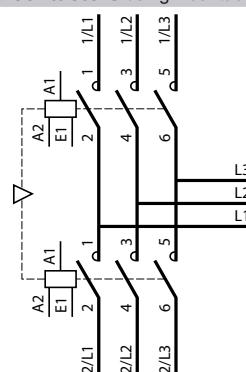

Selection :
pages 5/241 to 5/245

Characteristics :
pages 5/246 to 5/249

References :
pages 5/250 to 5/259


Dimensions :
pages 5/260 and 5/263

Schemes (continued)


TeSys contactors
Magnetic latching contactors

Contactors CR1 B


CR1 B•31•12




CR1 B•31•21




CR1 B•31•30




CR1 B•32•12




CR1 B•32•21




CR1 B•32•30




CR1 B•33•12




CR1 B•33•21




CR1 B•33•30




CR1 B•34•12



CR1 B•34•21




CR1 B•34•30




Wiring schemes


Contactors CR1 F and CR1 B
with thermal overload relay

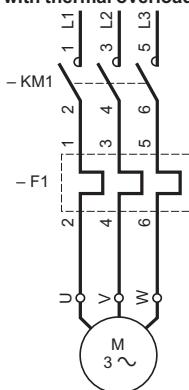

Contactors CR1 F

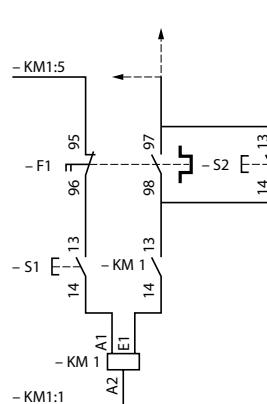


Connectors CR1 B

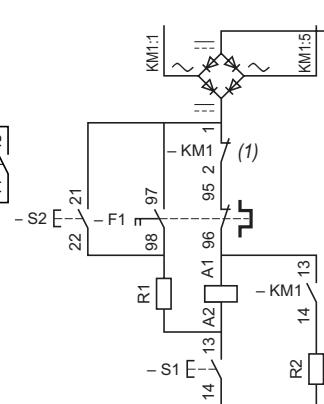


(1) automatic coil cut-out contact ZC4 GM or PR4 FB00••
S1: latching pushbutton
S2: unlatching pushbutton

Coils for contactors CR1 F

Pushbutton control

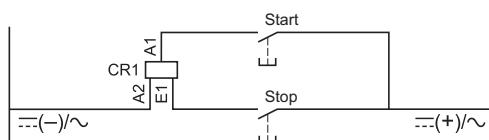


Switch control



Warning: terminal A2 is common to both windings in all cases.

Scheme of internal circuit

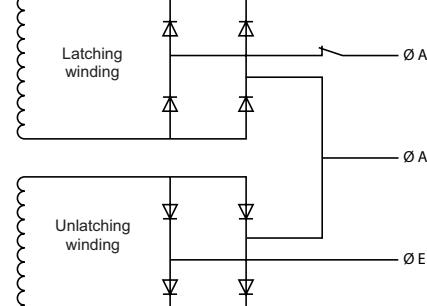

Selection :
pages 5/241 to 5/245

Characteristics :
pages 5/246 to 5/249

References :
pages 5/250 to 5/259

Dimensions :
page 5/264

Schneider
Electric

5/267

Selection guide

TeSys modular equipment

Applications	Control of lighting, heating, hot water systems, ventilation systems and small motors	
		
Functions	GC contactors for standard applications	GY "Dual tariff" contactors
Rating	16...63 A	16...63 A
Number of 17.5 mm modules (variable, depending on size and number of poles)	1...3	1...4
Device type	GC	GY
Pages	5/278	5/292

5

Control of lighting heating, hot water systems, ventilation systems and small motors



Direct control of motors



Fuse protection



Motor control and protection



Impulse relays

Rotary switch disconnectors

Single, 2, 3 or 4-pole fuse carriers, with or without neutral

Thermal-magnetic motor circuit-breakers

16 A

25...80 A

Up to 125 A

0.1...32 A

1

2.5

1...8

2.5

GF 16

VVD, VVE

DF8, DF10, DF14, DF22

GV2 M

5/286

Please consult your Regional Sales Office

4/26

3/46

5

Presentation, standards

TeSys modular equipment Standard contactors TeSys GC



GC 25

539862

Presentation

TeSys GC contactors are designed for use in modular panels and enclosures. These contactors feature:

■ Easy installation

- quick clip-on fixing and locking onto 35 mm omega rail,
- easy connection by means of ready-to-tighten, captive, pozidrive screw terminals.

■ Compact size

All units have a common depth of 60 mm and width in modules of 17.5 mm (width of one module: 17.5 mm).

■ User safety

- use of materials conforming to strictest fire safety standards,
- live parts protected against direct finger contact,
- completely safe operation,
- state indication on front panel.

Standards

This range of modular contactors has been designed taking into account the requirements of international standard IEC 61095.

This standard is specific to "Electromagnetic contactors for domestic and similar use".

It has very strict requirements, meeting the expectations of users, with regard to the safety of equipment and persons in "premises and areas accessible to the public". Conformity with this standard makes it possible to obtain the following quality labels without the need for additional tests: NF-USE, VDE, CEBEC, etc.

Applications

TeSys GC modular contactors are designed for switching all single-phase, 3-phase or 4-phase loads up to 100 A.

Power switching

These contactors have multiple applications in industrial, agricultural and commercial premises, hospitals and the home, i.e. wherever switching of a specific supply is required:

- lighting,
- heating,
- ventilation,
- motorised shutters or gates.


Setting-up precautions

TeSys modular equipment


Standard contactors TeSys GC

Setting-up precautions

The contactor controls must be bounce free. If not, connect a coil suppression block 1 (GAP 21, 22 or 23) across the coil terminals ≤ 250 V.
When several contactors which operate at the same time are mounted side by side, a GAC 5 ventilation 1/2 module 2 must be fitted every 2 contactors.

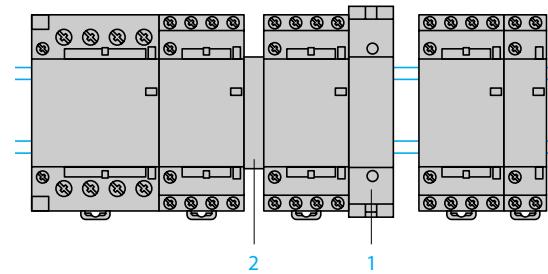

It is advisable to mount electronic units at the bottom of the modular panel and to separate them from electromechanical units by a space 3 equal to one module, or by 2 ventilation 1/2 modules (GAC 5).



5

Derating of contactors mounted in a modular enclosure if the temperature within the enclosure is > 40 °C

Contactor rating	40 °C	50 °C	60 °C (1)
16 A	16 A	14 A	13 A
25 A	25 A	22 A	20 A
40 A	40 A	36 A	32 A
63 A	63 A	57 A	50 A
100 A	100 A	87 A	80 A

(1) Ventilation 1/2 module must be fitted

Contactor selection for lighting circuits


TeSys modular equipment

Modular contactors


Lighting (Maximum number of lamps depending on the power of each unit)

Presentation of installations according to type of supply

Single-phase circuit, 230 V




3-phase circuit, 230 V

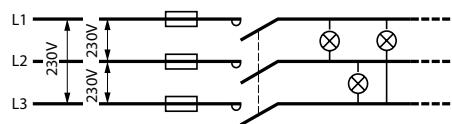

The maximum number of lamps which can be operated per phase is equal to the number of lamps in the "single phase 230 V" table divided by $\sqrt{3}$.

3-phase circuit, 400 V (with neutral)

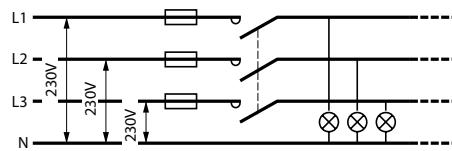

The maximum number of lamps which can be operated per phase is equal to the total number of lamps in the "single-phase 230 V" table.

Contactor rating for a single-phase 230 V circuit (single-pole)

Fluorescent lamps with starter

Single fitting	Non corrected					With parallel correction					Contactor rating
	20	40	50	80	110	20	40	58	80	110	
I_b (A)	0.39	0.43	0.70	0.80	1.2	0.19	0.29	0.46	0.57	0.79	—
C (μ F)	—	—	—	—	—	5	5	7	7	16	—

Maximum number of lamps	22	20	13	10	7	15	15	10	10	5	16 A
	30	28	17	15	10	20	20	15	15	7	25 A
	70	60	35	30	20	40	40	30	30	14	40 A
	100	90	56	48	32	60	60	43	43	20	63 A

Twin fitting	Non corrected					With series correction					Contactor rating
	2x18	2x36	2x58	2x80	2x140	2x18	2x36	2x58	2x80	2x140	
I_b (A)	0.44	0.82	1.34	1.64	2.2	0.26	0.48	0.78	0.96	1.3	—
C (μ F)	—	—	—	—	—	3.5	4.5	7	9	18	—

Maximum number of lamps	20	11	7	5	4	30	17	10	9	6	16 A
	30	16	10	8	6	46	25	16	13	10	25 A
	50	26	16	13	10	80	43	27	22	16	40 A
	75	42	25	21	16	123	67	42	34	25	63 A

High pressure mercury vapour lamps

	Non corrected						With parallel correction					Contactor rating	
	50	80	125	250	400	700	50	80	125	250	400	700	
I_b (A)	0.6	0.8	1.15	2.15	3.25	5.4	0.35	0.50	0.7	1.5	2.4	4	5.7
C (μ F)	—	—	—	—	—	—	7	8	10	18	25	40	60

Maximum number of lamps	15	10	8	4	2	1	10	9	9	4	3	2	—	16 A
	20	15	10	6	4	2	15	13	10	6	4	2	1	25 A
	34	27	20	10	6	4	28	25	20	11	8	5	3	40 A
	53	40	28	15	10	6	43	38	30	17	12	7	5	63 A

I_b : value of current drawn by each lamp at its rated voltage.

C: unit capacitance for each lamp.

I_b and C correspond to values normally quoted by lamp manufacturers

Characteristics :
pages 5/276 and 5/277

References :
pages 5/278 and 5/279

Dimensions, schemes :
pages 5/280 and 5/281

5/272

Schneider
Electric

Contactor selection for lighting circuits (continued)

TeSys modular equipment

Modular contactors

Contactor rating for a single-phase 230 V circuit (single-pole) (continued)

Low pressure sodium vapour lamps

	Non corrected						With parallel correction						Contactor rating
P (W)	18	35	55	90	135	180	18	35	55	90	135	180	-
I _b (A)	0.35	1.4	1.4	2.1	3.1	3.1	0.35	0.6	0.6	0.9	0.9	0.9	-
C (μF)	-	-	-	-	-	-	5	20	20	26	45	40	-
Maximum number of lamps	18	4	5	3	2	2	14	3	3	2	1	1	16 A
	34	9	9	6	4	4	21	5	5	4	2	2	25 A
	57	14	14	9	6	6	40	10	10	8	4	5	40 A
	91	24	24	19	10	10	60	15	15	11	6	7	63 A

High pressure sodium vapour lamps

	Non corrected						With parallel correction						Contactor rating
P (W)	70	150	250	400	1000		70	150	250	400	1000		-
I _b (A)	1	1.8	3	4.4	10.3		0.6	0.7	1.5	2.5	6		-
C (μF)	-	-	-	-	-		12	20	32	45	100		-
Maximum number of lamps	8	4	2	1	-		6	6	2	2	1		16 A
	12	7	4	3	1		9	9	3	4	2		25 A
	20	13	8	5	2		18	18	6	8	4		40 A
	32	18	11	8	3		25	25	9	12	6		63 A

Metal iodine or halogen vapour lamps

	Non corrected						With parallel correction						Contactor rating
P (W)	35	70	150	250	400	1000	39	70	150	250	400	1000	2000
I _b (A)	0.3	0.5	1	1.5	2.5	6	0.3	0.5	1	1.5	2.5	6	5.5
C (μF)	-	-	-	-	-	-	6	12	20	32	45	85	60
Maximum number of lamps	27	16	8	5	3	1	12	6	4	3	2	-	1
	40	24	12	8	5	2	18	9	6	4	3	1	2
	68	42	20	14	8	4	31	16	10	7	5	3	3
	106	64	32	21	13	5	50	25	15	10	7	4	5

Incandescent and halogen lamps

	Non corrected						With parallel correction						Contactor rating
P (W)	60	75	100	150	200	300	500	1000					-
I _b (A)	0.26	0.32	0.44	0.65	0.87	1.3	2.17	4.4					-
Maximum number of lamps	30	25	19	12	10	7	4	2					16 A
	45	38	28	18	14	10	6	3					25 A
	85	70	50	35	26	18	10	6					40 A
	125	100	73	50	37	25	15	8					63 A

Halogen lamps used with transformer

	Non corrected						With parallel correction						Contactor rating
P (W)	60	80	105	150									-
I _b (A)	0.26	0.35	0.45	0.65									-
Maximum number of lamps	9	8	6	4									16 A
	14	12	9	6									25 A
	27	23	18	13									40 A
	40	35	27	19									63 A

I_b: value of current drawn by each lamp at its rated voltage.


C : unit capacitance for each lamp.

I_b and C correspond to values normally quoted by lamp manufacturers


Contactor selection for heating circuits (continued)

TeSys modular equipment
Modular contactors

Heating (AC-7a)
Single-phase, 2-pole switching

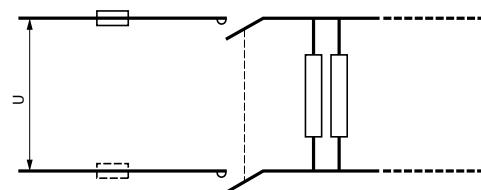

3-phase switching

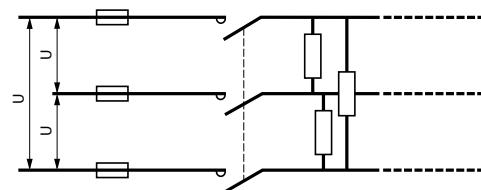

Heating by resistive elements or by infra-red radiators, convectors or radiators, heating ducts, industrial furnaces. The current peak between the hot and cold states must not exceed 2 to 3 In at the moment of switch-on.

Contactor selection according to power and required electrical life


Electrical durability (in operating cycles)	Maximum power (kW)					Contactor rating
	100 x 10 ³	150 x 10 ³	200 x 10 ³	500 x 10 ³	10 ⁶	
Single-phase switching 230 V (2-pole)	3.5	3	2.2	1	0.8	16 A
	5.4	4.6	3.5	1.6	1.2	25 A
	8.6	7.4	5.6	2.6	1.9	40 A
	13.6	11.6	8.8	4	3	63 A
	21.6	18.4	14	6.4	4.8	100 A
3-phase switching 400 V (3-pole)	10	9	6.5	3.2	2.2	16 A
	16	14	10	5	3.5	25 A
	26	22	17	7.5	6	40 A
	41	35	26.5	12	9	63 A
	64.8	55.2	42	19.2	14.4	100 A

*Contactor selection for
motor control*


TeSys modular equipment
Modular contactors

Motor control (AC-7b)

Single-phase circuit, 230 V

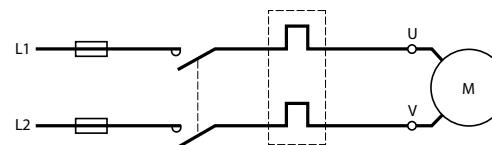

3-phase circuit, 400 V

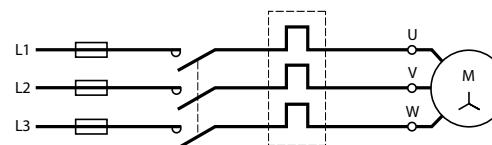

Contactor selection according to maximum power in kW

230 V single-phase
capacitor motor
(2-pole)

400 V 3-phase motor

Contactor
rating
(I_{th})

0.55	2.2	16 A
1.1	4	25 A
2.2	7.5	40 A
4	11	63 A

5

Characteristics :
pages 5/276 and 5/277

References :
pages 5/278 and 5/279

Dimensions, schemes :
pages 5/280 and 5/281

Schneider
Electric

5/275

Characteristics

TeSys modular equipment TeSys GC standard contactors

Contactor type		GC16	GC25	GC40	GC63	GC100
Environment						
Rated insulation voltage (Ui)	Conforming to IEC 61095 Conforming to VDE 0110	V	500			
Rated impulse withstand voltage (Uiimp)		kV	4 in enclosure			
Conforming to standards			IEC 61095, VDE 0637-3 and IEC 60947-5 for auxiliary contacts			
Product certifications			NF- USE, VDE, CEBEC, ÖVE			
Degree of protection	Conforming to VDE 0106		Protection against direct finger contact (IP 20 open, IP 40 in enclosure)			
Protective treatment	Standard version		"TC"			
Ambient air temperature around the device	Storage Operation	°C	- 40...+ 70 - 5...+ 50 (0.85...1.1 Uc)			
Maximum operating altitude	Without derating	m	3000			
Operating positions	Without derating		± 30° in relation to normal vertical mounting plane			
Shock resistance 1/2 sine wave = 10 ms	Contactor open Contactor closed		10 gn 15 gn			
Vibration resistance 5...300 Hz	Contactor open Contactor closed		2 gn 3 gn			
Flame resistance			Conforming to IEC 61095			
Pole characteristics						
Number of poles			2, 3 or 4			
Rated operational current (Ie) (Ue ≤ 440 V)	In AC-7a (heating) In AC-7b (motor control)	A	16 5	25 8.5	40 15	63 25
Rated operational voltage (Ue)	Up to	V	250 two-pole contactors, 415 three and four-pole contactors			
Frequency limits	Of the operating current	Hz	400			
Conventional thermal current (Ith)	θ ≤ 50 °C	A	16	25	40	63
Rated breaking and making capacity	Conforming to IEC 61095 (AC-7b) I rms 400 V 3-phase	A	40	68	120	200
Permissible short time rating no current flowing for preceding 15 minutes with θ ≤ 40 °C	For 10 s For 30 s	A	128 40	200 62	320 100	504 157
Short-circuit protection by fuse or circuit breaker U ≤ 440 V	gl fuse Circuit-breaker I ² t 230 V (at 3 kA rms prospective)	A A ² s	16 5000 9000	25 10 000 14 000	40 16 000 17 500	63 18 000 20 000
Average impedance per pole	At Ith and 50 Hz	mΩ	2.5	2.5	2	2
Power dissipated per pole	For the above operational currents	W	0.65	1.6	3.2	8
Maximum cabling c.s.a.	Flexible cable without cable end Flexible cable with cable end Solid cable without cable end	mm ²	6 4 6 1.5 6 4	6 4 6 1.5 6 4	25 16 16 4 25 6	35 — 35 — 35 10
Tightening torque	Power circuit connections	N.m	0.8	0.8	3.5	3.5

Selection :
pages 5/272 to 5/275

References :
pages 5/278 and 5/279

Dimensions, schemes :
pages 5/280 and 5/281

Characteristics (continued)

TeSys modular equipment
TeSys GC standard contactors

Contactor type		GC16, GC25 single or 2-pole	GC16, GC25 3 or 4-pole GC40, GC63 2-pole	GC40, GC63 3 or 4-pole GC100 2-pole	GC100 4-pole
Control circuit characteristics					
Rated control circuit voltage (Uc)	50 or 60 Hz	V	12...240 V, for other voltages, please consult your Regional Sales Office		
Control voltage limits (θ ≤ 50 °C)	50 Hz coils Operational Drop-out		0.85...1.1 Uc 0.2...0.75 Uc		
Average coil consumption at 20 °C and at Uc	~ 50 Hz Inrush Sealed	VA	15 3.8	34 4.6	53 6.5
Maximum heat dissipation	50/60 Hz	W	1.3	1.6	2.1
Operating time	Closing "C" Opening "O"	ms	10...30 10...25		
Mechanical durability	In operating cycles		10 ⁶		
Maximum operating rate at ambient temperature ≤ 50 °C	In operating cycles per hour		300		
Maximum cabling c.s.a.	Flexible cable without cable end Flexible cable with cable end Solid cable without cable end	mm ²	2.5 2.5 1.5		
Tightening torque		N.m	0.8		
Instantaneous auxiliary contact characteristics					
Rated operational voltage (Ue)	Up to	V	250		
Rated insulation voltage (Ui)	Conforming to IEC 60947-5 Conforming to VDE 0110	V	500 500		
Conventional thermal current (Ith)	For ambient θ ≤ 50 °C	A	5		
Mechanical durability	Operating cycles		10 ⁶		
Maximum cabling c.s.a.	Flexible or solid conductor	mm ²	2.5		
Tightening torque		N.m	0.8		

5

References

TeSys modular equipment Standard contactors TeSys GC

S26285




GC 2520

S26286



GC 4040

5

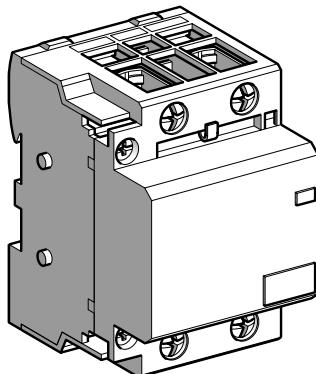

GC 10020

Standard contactors, TeSys GC					
Maximum current rating category	No. of poles	Number of 17.5 mm modules	Sold in lots of	Basic reference, to be completed by adding the voltage code (1)	Weight
A	d	b			kg
16	1	1	12	GC 1610••	0.110
	2	—	1	GC 1620••	0.110
	3	—	2	GC 1630••	0.230
	4	—	2	GC 1640••	0.230
	1	1	1	GC 1611••	0.110
	2	2	2	GC 1622••	0.230
25	1	—	1	GC 2510••	0.110
	2	—	1	GC 2520••	0.110
	3	—	2	GC 2530••	0.230
	4	—	2	GC 2540••	0.230
	1	1	1	GC 2511••	0.110
	2	2	2	GC 2522••	0.230
	—	2	1	GC 2502••	0.110
	—	4	2	GC 2504••	0.230
40	2	—	2	GC 4020••	0.230
	3	—	3	GC 4030••	0.350
	4	—	3	GC 4040••	0.390
	1	1	2	GC 4011••	0.230
	2	2	3	GC 4022••	0.390
	—	2	2	GC 4002••	0.230
	—	4	3	GC 4004••	0.390
63	2	—	2	GC 6320••	0.340
	3	—	3	GC 6330••	0.390
	4	—	3	GC 6340••	0.390
	1	1	2	GC 6311••	0.340
	2	2	3	GC 6322••	0.390
	—	2	2	GC 6302••	0.340
	—	4	3	GC 6304••	0.390
100	2	—	3	GC 10020••	0.680
	4	—	6	GC 10040••	0.780

(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):

Volts	12	24	48	110	220/240
50 Hz	J5	B5	E5	F5	M5
60 Hz	J6	B6	E6	F6	M6

Selection :
pages 5/272 to 5/275

Characteristics :
pages 5/276 and 5/277


Dimensions, schemes :
pages 5/280 and 5/281

5/278

Schneider
Electric

References (continued)


TeSys modular equipment
Standard contactors TeSys GC




GAC 05••




GAP 2•




GAC 5



GW 254



GA1 C6



GW 630

Instantaneous auxiliary contact blocks

Number of contacts	No. of poles	Reference	Weight
2	1 1 -	GAC 0521	0.016 kg
-	2 -	GAC 0531	0.016
-	- 1	GAC 0511	0.016

Accessories

Description	For use on contactor	Number of modules	Operational voltage V	Sold in lots of	Unit reference	Weight
Coil suppression blocks comprising 2 RC circuits	-	1	12...48	1	GAP 21	0.090 kg
			110...240	1	GAP 23	0.090
Ventilation 1/2 module Clips onto L rail	-	1/2	-	10	GAC 5	0.015
Cover plates	-	1/2	-	10	GA1 C7	0.001
		1	-	10	GA1 C6	0.001
Set of sealable terminal covers (10 top parts + 10 bottom parts)	16 or 25 A 3 or 4 contacts	2	-	1	GW 254	0.040
	40 or 63 A 2 contacts	2	-	1	GW 632	0.040
	40 or 63 A 3 or 4 contacts	3	-	1	GW 634	0.050

5

Selection :
pages 5/272 to 5/275

Characteristics :
pages 5/276 and 5/277

Dimensions, schemes :
pages 5/280 and 5/281

Schneider
Electric

5/279


Dimensions

TeSys modular equipment TeSys GC standard contactors

Dimensions

Contactors

Common side view




GC 1610, 1611, 1620
GC 2502, 2510, 2511, 2520


1 module

GC 1622, 1640
GC 2504, 2522, 2530, 2540

2 modules



Common side view




GC 4002, 4011, 4020
GC 6302, 6311, 6320


2 modules

GC 4004, 4022, 4030, 4040
GC 6304, 6322, 6330, 6340

3 modules





Common side view



GC 10020
3 modules

GC 10040
6 modules




Dimensions (continued)
schemes

TeSys modular equipment
TeSys GC standard contactors

Dimensions


Auxiliary contacts

GAC 0511, 0531 and 0521

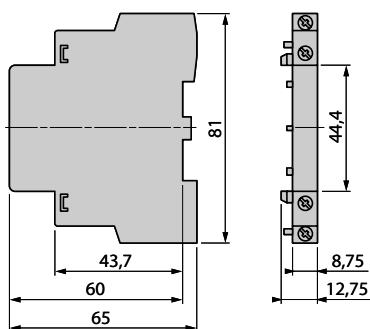


Coil suppression blocks

GAP 21, 22 and 23

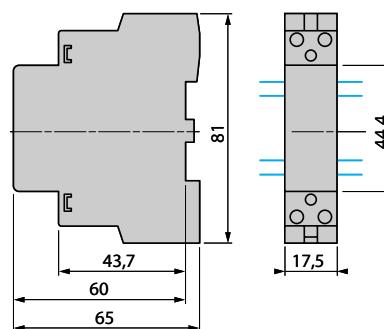


Clip-on ventilation 1/2 module

GAC 5




Cover plates

GA1 C6



GA1 C7



Schemes





Contactors

GC ●●10

GC ●●20

GC ●●30

GC ●●40







GC ●●11

GC ●●22

GC ●●02

GC ●●04






Auxiliary contacts

GAC 0521

GAC 0531

GAC 0511



Selection :
pages 5/272 to 5/275

Characteristics :
pages 5/276 and 5/277

References :
pages 5/278 and 5/279

Dimensions :
page 5/280

Schneider
Electric

5/281

Presentation

TeSys modular equipment

TeSys GF impulse relays



GF 1611M7

Presentation

TeSys GF impulse relays are designed for use in modular enclosures.
They feature:

■ Easy installation

- quick clip-on fixing and locking onto 35 mm omega rail,
- easy connection by means of ready-to-tighten captive, pozidrive screw terminals.

■ Compact size

Units have a common depth of 60 mm and width of 18 mm.

■ User safety

- live parts protected against direct finger contact,
- completely safe operation,
- state indication on front panel.

Standards

This range of modular impulse relays has been designed taking into account the requirements of international standard IEC 60669-2.

This standard is specific to "Impulse relays".

Conformity with this standard makes it possible to obtain the following quality labels without the need for additional tests: NF-USE, VDE, CEBEC, etc.

Functions

Modular impulse relays are designed for opening and closing of circuits which are remotely controlled by impulses. The position is mechanically maintained.

These impulse relays are used in lighting circuits when there are more than two switching points.

Power switching

TeSys GF impulse relays have multiple applications in industrial, agricultural and commercial premises, hospitals and the home, i.e. wherever switching of a specific lighting supply is required:

*Selection for lighting
and heating circuits*

TeSys modular equipment
TeSys GF impulse relays

Lighting circuits						
Fluorescent lamps with starter						
Single fitting	Non corrected				With parallel correction	
Power in W	18	36	58		18	36
Number of lamps	70	35	21		50	25
Twin fitting	With series correction					
Power in W	2 x 18	2 x 36	2 x 58			
Number of lamps	56	28	17			
Incandescent lamps: filament lamps						
Power in W	40	60	75	100	200	
Number of lamps	40	25	20	16	8	
Incandescent lamps: halogen lamps						
Power in W	300	500	1000	1500		
Number of lamps	5	3	1	1		
Incandescent lamps: very low voltage halogen lamps						
Power in W	20	50	75	100		
Number of lamps	70	28	19	4		
Low pressure sodium vapour lamps						
Power in W	Non corrected					
55	90	135	180			
Number of lamps	24	15	10	7		
High pressure sodium vapour lamps						
Power in W	Non corrected					
250	400	1000				
Number of lamps	5	3	1			
Heating circuits						
Single-phase 230 V, 2-pole						
Power in kW	3.6					

5

Characteristics

TeSys modular equipment

TeSys GF impulse relays

Environment

Rated insulation voltage (Ui)	Conforming to IEC 60947-1-5	V	400
	Conforming to VDE 0110	V	400
Rated impulse withstand voltage (Uimp)			kV 4 in enclosure
Conforming to standards			IEC 60669-1 and 60669-2, NF C 61-112
Product certifications			NF-USE, CEBEC, ASE, KEMA, N, S, D, FI, VDE
Degree of protection	Conforming to VDE 0106		
Protective treatment	Standard version		
Ambient air temperature around the device	Storage	°C	- 40...+ 80
	Operation	°C	- 20...+ 50
Maximum operating altitude	Without derating	m	2000
Operating positions	Without derating		
Shock resistance 1/2 sine wave = 10 ms	Impulse relay open		
	Impulse relay closed		
Vibration resistance 5...300 Hz	Impulse relay open		
	Impulse relay closed		

5

Pole characteristics

Number of poles				1 or 2
Rated operational current (Ie) (Ue ≤ 250 V)	In AC-7a (heating)	A	16	
Rated operational voltage		V	250	
Conventional thermal current (Ith)	θ ≤ 50 °C	A	16	
Permissible short time rating no current flowing for preceding 15 minutes with θ ≤ 40 °C	For 1 s	A	320	
	For 10 s	A	96	
	For 30 s	A	48	
Short-circuit protection by fuse or circuit-breaker	gl fuse	A	16	
	Circuit-breaker I ² t (at 3 kA rms prospective)	A ² s	5000	
Average impedance per pole	At Ith and 50 Hz	mΩ	4	
Power dissipated per pole		W	1	
Maximum cabling c.s.a.			Min.	Max.
Flexible cable without cable end	1 conductor	mm ²	0.5	6
	2 conductors	mm ²	0.5	4
Flexible cable with cable end	1 conductor	mm ²	0.5	6
	2 conductors	mm ²	0.5	4
Solid cable without cable end	1 conductor	mm ²	0.5	6
	2 conductors	mm ²	0.5	4
Tightening torque	Power circuit connections	N.m	0.8	

Presentation :
page 5/282

Selection :
page 5/283

References :
page 5/286

Dimensions, schemes :
page 5/287

5/284

Schneider
Electric

Characteristics (continued)

TeSys modular equipment
TeSys GF impulse relays

Control circuit characteristics

Rated control circuit voltage (Uc)	V	12...240 V, for other voltages, please consult your Regional Sales Office
Control voltage limits (θ < 50 °C)	Operating threshold, dual frequency 50/60 Hz	V 0.85...1.1 Uc
Average consumption at 20 °C and at Uc	Inrush at 50 Hz	VA 19
Operating time	Closing "C"	ms 70
	Opening "O"	ms 70
Minimum impulse time	ms	70
Mechanical durability		10 ⁶ operating cycles
Electrical durability	AC-21	200 000 operating cycles
	AC-22	100 000 operating cycles
Maximum operating rate	Operating cycles per hour	900
Maximum cabling c.s.a.	Flexible cable without cable end	mm ² 2.5
	Flexible cable with cable end	mm ² 2.5
		mm ² 1.5
	Solid cable without cable end	mm ² 1.5
Tightening torque	N.m	0.8

5

References

TeSys modular equipment TeSys GF impulse relays

PF5284



GF 1611M7

TeSys GF impulse relays		Composition	Coil voltages		Sold in lots of	Unit reference	Weight
Maximum current rating category AC-1			~ 50/60 Hz	---			
A			V	V			kg
16	1	-	12	6	12	GF 1610J7	0.110
			24	12	12	GF 1610B7	0.110
			48	24	12	GF 1610E7	0.110
			110	48	12	GF 1610F7	0.110
			220	-	12	GF 1610M7	0.110
			230/240	110	12	GF 1610U7	0.110
	2	-	12	6	12	GF 1620J7	0.110
			24	12	12	GF 1620B7	0.110
			48	24	12	GF 1620E7	0.110
			110	48	12	GF 1620F7	0.110
			220	-	12	GF 1620M7	0.110
			230/240	110	12	GF 1620U7	0.110
	1	1	12	6	12	GF 1611J7	0.110
			24	12	12	GF 1611B7	0.110
			48	24	12	GF 1611E7	0.110
			110	48	12	GF 1611F7	0.110
			220	-	12	GF 1611M7	0.110
			230/240	110	12	GF 1611U7	0.110

5

Presentation :
page 5/282

Selection :
page 5/283

Characteristics :
pages 5/284 and 5/285

Dimensions, schemes :
page 5/287

5/286


Schneider
Electric

*Dimensions,
schemes*

TeSys modular equipment
TeSys GF impulse relays


Dimensions

GF 1610, GF 1611, GF 1620

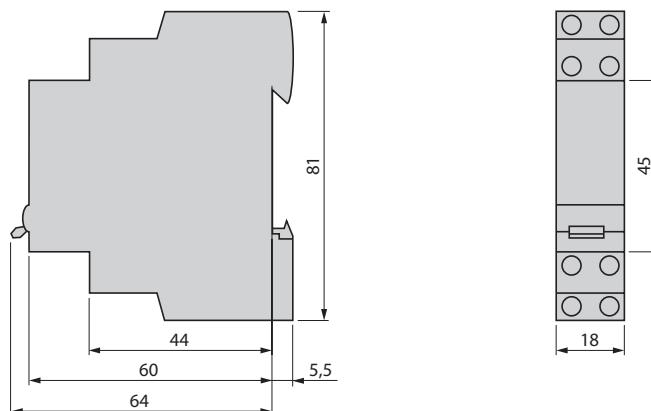


Schemes


GF 1610



GF 1611



GF 1620



Presentation standards



GY 25

TeSys modular equipment TeSys GY "dual tariff" contactors

Presentation

TeSys GY "dual tariff" contactors are designed for use in modular panels and enclosures.

These contactors feature:

■ Easy installation

- quick clip-on fixing and locking onto 35 mm omega rail,
- easy connection by means of ready-to-tighten captive, pozidrive screw terminals.

■ Compact size

All units have a common depth of 60 mm and width in modules of 17.5 mm (width of one module: 17.5 mm).

■ User safety

- use of materials conforming to strictest fire safety standards,
- live parts protected against direct finger contact,
- completely safe operation,
- state indication on front panel.

"Dual tariff" contactors are designed for use with Electricity Supply Authority dual tariffs.

They have a 4-position selector switch on the front panel:

- | | |
|-------------------|--|
| "Stop" (O) | For switching off the load, e.g. for prolonged periods of absence. |
|-------------------|--|

"Off peak"

Automatic start (A)

The contactor switches automatically during "off peak" hours as set by the Supply Authority remote control and thus supplies the load, (washing machine, dishwasher, convector heater, water heater) during this period, at an economy rate to the user.

"Peak time"

Manual start (I)

In this position, the contactor supplies the load to cater for additional requirements for hot water, heating, etc., but at the standard rate. The contactor returns automatically to the "off-peak" position at the start of the "off-peak" period.

"Peak time"

Manual override with lock

Facility for setting the contactor to continuous manual operation, ignoring the automation system and the Supply Authority control; setting and locking is achieved by means of a tool, with manual return to the "AUTO" position.

Standards

This range of modular contactors has been designed taking into account the requirements of international standard IEC 61095.

This standard is specific to "Electromagnetic contactors for domestic and similar use".

It has very strict requirements, meeting the expectations of users, with regard to the safety of equipment and persons in "premises and areas accessible to the public". Conformity with this standard makes it possible to obtain the following quality labels without the need for additional tests: NF-USE, VDE, CEBEC, etc.

Applications

"Dual tariff" modular contactors are designed for switching all single-phase, 3-phase or 4-phase loads up to 63 A.

Power switching

TeSys GY contactors have multiple applications in industrial, agricultural and commercial premises, hospitals and the home, i.e. wherever switching of a specific supply is required:


- lighting,
- heating, ventilation,
- motorised shutters or gates.

Setting-up precautions


TeSys modular equipment TeSys GY "dual tariff" contactors

Setting-up precautions

The contactor controls must be bounce free. If not, connect a coil suppression block 1 (GAP 21, 22 or 23) across the coil terminals ≤ 250 V.
When several contactors which operate at the same time are mounted side by side, a GAC 5 ventilation 1/2 module 2 must be fitted every 2 contactors.

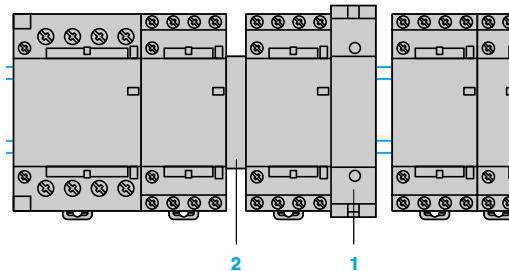

It is advisable to mount electronic units at the bottom of the modular panel and to separate them from electromechanical units by a space equal to one module 3 or by 2 ventilation 1/2 modules GAC 5



5

Derating of contactors mounted in a modular enclosure if the temperature within the enclosure is > 40 °C

Contactor rating	40°C	50°C	60 °C (1)
16 A	16 A	14 A	13 A
25 A	25 A	22 A	20 A
40 A	40 A	36 A	32 A
63 A	63 A	57 A	50 A

(1) Ventilation 1/2 module must be fitted

Selection :
pages 5/272 to 5/275

Characteristics :
pages 5/290 and 5/291

References :
pages 5/292 and 5/293

Dimensions and schemes :
pages 5/294 and 5/295

Schneider
Electric

5/289

Characteristics

TeSys modular equipment TeSys GY "dual tariff" contactors

Environment

Type		GY 16	GY 25	GY 40	GY 63
Rated insulation voltage (Ui)	Conforming to IEC 61095	V	500		
	Conforming to VDE 0110	V	500		
Rated impulse withstand voltage (Uimp)		kV	4 in enclosure		
Conforming to standards			IEC 61095, VDE 0637-3 and IEC 60947-5 for auxiliary contacts		
Product certifications			NF-USE, VDE, CEBEC, ÖVE		
Degree of protection	Conforming to VDE 0106		Protection against direct finger contact IP 20 open, IP 40 in enclosure		
Protective treatment	Standard version		"TC"		
Ambient air temperature around the device	Storage	°C	- 40...+ 70		
	Operation	°C	- 5...+ 50 (0.85...1.1 Uc)		
Maximum operating altitude	Without derating	m	3000		
Operating positions	Without derating		± 30° in relation to normal vertical mounting plane		
Shock resistance 1/2 sine wave = 11 ms	Contactor open		10 gn		
	Contactor closed		15 gn		
Vibration resistance 5...300 Hz	Contactor open		2 gn		
	Contactor closed		3 gn		
Flame resistance			Conforming to IEC 61095		

Pole characteristics

Number of poles		2, 3 or 4			
Rated operational current (Ie) (Ue ≤ 440 V)	In AC-7a (heating) In AC-7b (motor control)	A	16 5	25 8.5	40 15
Rated operational voltage (Ue)	Up to	V	250 - 2-pole contactors, 415 - 3 and 4-pole contactors		
Frequency limits	Of the operating current	Hz	400		
Conventional thermal current (Ith)	0 ≤ 50 °C	A	16	25	40
Rated breaking and making capacity	Conforming to IEC 61095 (AC-7b) I rms 400 V 3-phase	A	40	68	120
Short time rating	For 10 s	A	128	200	320
with no current flow for the previous 15 minutes with θ ≤ 40 °C	For 30 s	A	40	62	100
					504
					157
Short-circuit protection by fuse or circuit breaker U ≤ 440 V					
gl fuse		A	16	25	40
Circuit breaker I ² t 230V (at 3 kA rms prospective)	400V	A ² s	5000	10 000	16 000
		A ² s	9000	14 000	17 500
Average impedance per pole	At Ith and 50 Hz	mΩ	2.5	2.5	2
Power dissipated per pole	For the above operational currents	W	0.65	1.6	3.2
Maximum cabling c.s.a.					
Flexible cable without cable end	1 conductor	mm ²	6	6	25
	2 conductors	mm ²	4	4	16
Flexible cable with cable end	1 conductor	mm ²	6	6	16
	2 conductors	mm ²	1.5	1.5	4
Solid cable without cable end	1 conductor	mm ²	6	6	25
	2 conductors	mm ²	4	4	6
Tightening torque	Power circuit connections	N.m	0.8	0.8	3.5

Selection :
pages 5/272 to 5/275

References :
pages 5/292 and 5/293

Dimensions and schemes :
pages 5/294 and 5/295

5/290

Schneider
Electric

Characteristics (continued)

TeSys modular equipment
TeSys GY “dual tariff” contactors

5

Control circuit characteristics

Type			GY 16, GY 25 single or 2-pole	GY 16, GY 25 3 or 4-pole	GY 40, GY 63 3 or 4-pole
Rated control circuit voltage (Uc)	50 or 60 Hz	V	12...240 V, for other voltages, please consult your Regional Sales Office		
Control voltage limits ($0 \leq 50^{\circ}\text{C}$)					
50 Hz coils	Operational		0.85...1.1 Uc		
	Drop-out		0.2...0.75 Uc		
Average consumption at 20°C and at Uc					
~ 50 Hz	Inrush	VA	15	34	53
	Sealed	VA	3.8	4.6	6,5
Heat dissipation	50/60 Hz	W	1.3	1.6	2.1
Operating time	Closing “C”	ms	10 ... 30		
	Opening “O”	ms	10 ... 25		
Mechanical durability	In operating cycles		10^6		
Maximum operating rate	In operating cycles per hour at ambient temperature $\leq 50^{\circ}\text{C}$		300		
Maximum cabling c.s.a.					
Flexible cable without cable end	1 or 2 conductors	mm ²	2.5		
Flexible cable with cable end	1 conductor	mm ²	2.5		
	2 conductors	mm ²	1.5		
Solid cable without cable end	1 or 2 conductors	mm ²	1.5		
Tightening torque		N.m	0.8		

Instantaneous auxiliary contact characteristics

Rated operational voltage (Ue)	Up to	V	250
Rated insulation voltage (Ui)	Conforming to IEC 60947-5	V	500
	Conforming to VDE 0110	V	500
Conventional thermal current (Ith)	For ambient $0 \leq 50^{\circ}\text{C}$	A	5
Mechanical durability	In operating cycles		10^6
Maximum cabling c.s.a.	Flexible or solid conductor	mm ²	2.5
Tightening torque		N.m	0.8

References

TeSys modular equipment TeSys GY "dual tariff" contactors

TeSys GY "dual tariff" contactors						
Maximum current rating category AC-7a	No. of poles	Number of 17.5 mm modules	Sold in lots of	Basic reference, to be completed by adding the voltage code (1)	Weight	
A					kg	
16	2	—	1	GY 1620••	0.110	
	4	—	2	GY 1640••	0.230	
	1	1	1	GY 1611••	0.110	
25	2	—	1	GY 2520••	0.110	
	3	—	2	GY 2530••	0.230	
	4	—	2	GY 2540••	0.230	
	1	1	1	GY 2511••	0.110	
40	2	—	2	GY 4020••	0.230	
	3	—	3	GY 4030••	0.350	
	4	—	3	GY 4040••	0.390	
63	2	—	2	GY 6320••	0.340	
	3	—	3	GY 6330••	0.390	
	4	—	3	GY 6340••	0.390	
(1) Standard control circuit voltages (for other voltages, please consult your Regional Sales Office):						
Volts	12	24	48	110	220/240	
50 Hz	J5	B5	E5	F5	M5	
60 Hz	J6	B6	E6	F6	M6	



GY 2520M5

526295



GY 6340M5

526296

5

Selection :
pages 5/272 to 5/275

Characteristics :
pages 5/290 and 5/291

Dimensions and schemes :
pages 5/294 and 5/295

5/292


Schneider
Electric

References


TeSys modular equipment TeSys GY "dual tariff" contactors




GAP 23



GAC 5



GA1 C



GW 254



GW 634

Instantaneous auxiliary contact blocks						
Number of contacts	Number of poles		Reference	Weight		
2	1	1	GAC 0521	0.016		
	2	-	GAC 0531	0.016		
	-	1	GAC 0511	0.016		

Accessories						
Description	For use on contactor	Number of modules	Operational voltage in V	Sold in lots of	Unit reference	Weight
Coil suppression blocks comprising 2 RC circuits	-	1	12...48	1	GAP 21	0.090
			110...240	1	GAP 23	0.090
Ventilation 1/2 module clips onto U rail	-	1/2	-	10	GAC 5	0.015
Cover plates	-	1/2	-	10	GA1 C7	0.001
			-	10	GA1 C6	0.001
Set of sealable terminal covers (10 top parts + 10 bottom parts)	16 or 25 A 3 or 4 contacts	2	-	1	GW 254	0.040
	40 or 63 A 2 contacts	2	-	1	GW 632	0.040
	40 or 63 A 3 or 4 contacts	3	-	1	GW 634	0.050

5

Selection :
pages 5/272 to 5/275

Characteristics :
pages 5/290 and 5/291

Dimensions and schemes :
pages 5/294 and 5/295

Schneider
Electric

5/293

Dimensions

TeSys modular equipment TeSys GY "dual tariff" contactors

"Dual tariff" contactors		
	GY 1611, 1620 GY 2511, 2520	GY 1640 GY 2530, 2540
Common side view	1 module	2 modules
Common side view	GY 4020 GY 6320	GY 4030, 4040 GY 6330, 6340
	2 modules	3 modules

5

Selection :
pages 5/272 to 5/275

Characteristics :
pages 5/290 and 5/291

References :
pages 5/292 and 5/293

Dimensions and schemes :
page 5/295

5/294



Schneider
Electric

*Dimensions (continued),
schemes*



TeSys modular equipment
TeSys GY "dual tariff" contactors

Dimensions



Auxiliary contacts
GAC 0511, 0531 and 0521

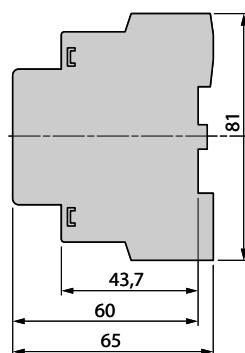


Coil suppression block
GAP 21, 22 and 23

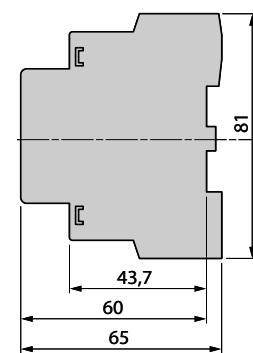


Clip-on ventilation 1/2 module
GAC 5



Cover plates
GA1 C6




GA1 C7




Schemes

Contactors


GY ●●20




GY ●●30



GY ●●40




GY ●●11




Auxiliary contacts


GAC 0521



GAC 0531



GAC 0511



Selection :
pages 5/272 to 5/275

Characteristics :
pages 5/290 and 5/291

References :
pages 5/292 and 5/293

Dimensions :
page 5/294

Schneider
Electric